






Toroidal transformer type 8N612

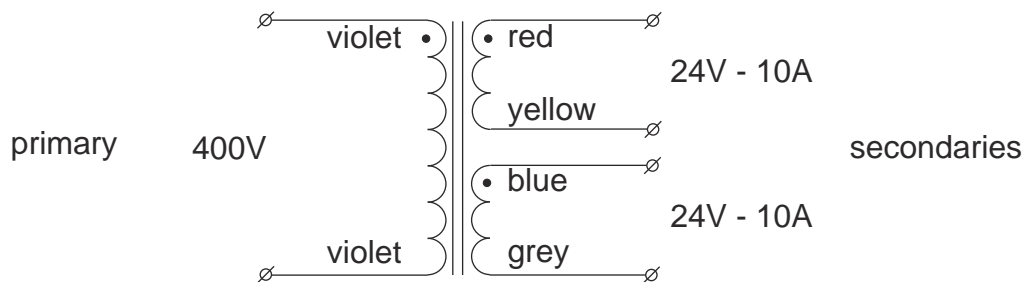

serial operation to double the secondary voltage

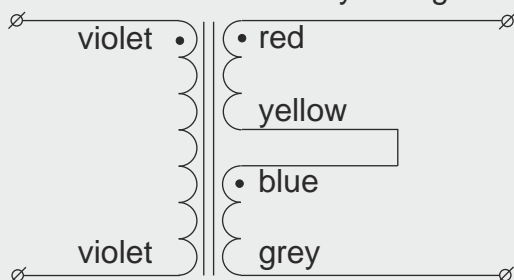

parallel operation to double the secondary current

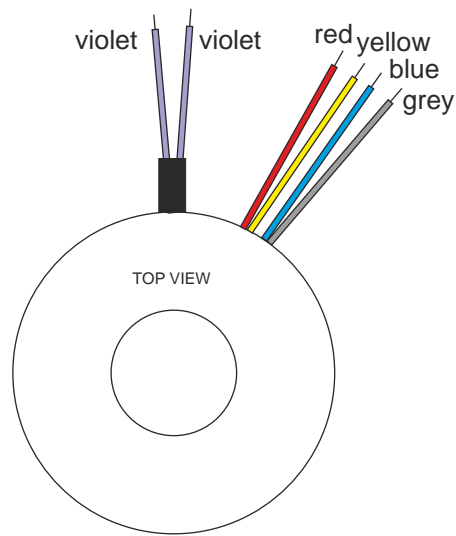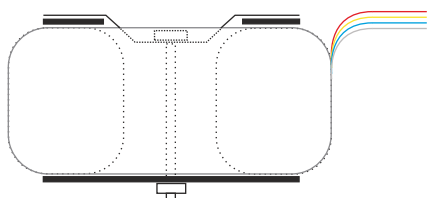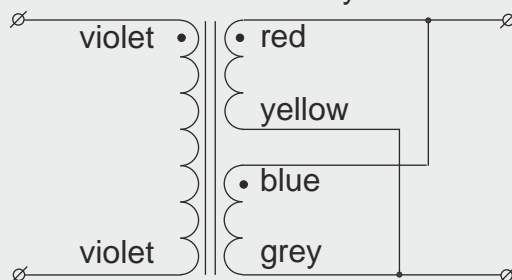

Power rating 500VA
 Primary voltage 400VAC - 50/60Hz
 Secondary voltages 2x 24V - 10A
 Regulation 4.5%

Diameter 135mm
 Height 63mm
 Weight 4.2kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø110mm
 2 neoprene washers Ø110mm
 1 bolt M8x70mm with nut

Wound and tested according to EN61558. With CE and UL/CSA approvals. UL filenumber E320377.



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457

info@amplimo.nl
<http://www.amplimo.nl>

HB

Aug 2012

8N612

400V toroidal transformer
 500VA

© Copyright Amplimo BV