


# AMPLIMO Toroidal Output Transformer type 55PP4K5H

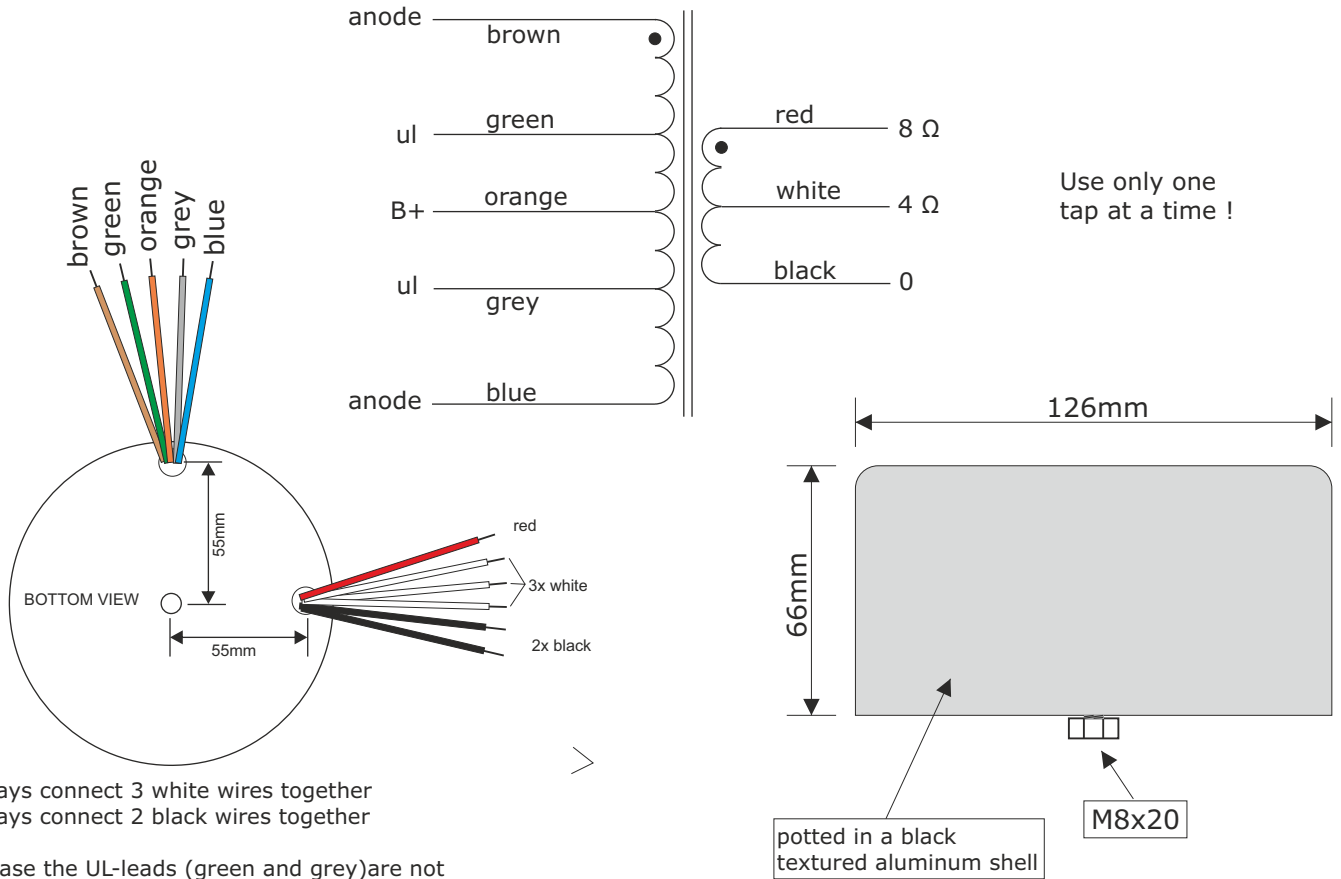

Always connect 3 white wires together  
Always connect 2 black wires together

In case the UL-leads (green and grey) are not used, insulate them carefully with heatsink !

primary impedance	4500 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	33.3 (4Ω) - 23.6 (8Ω)
UL-tap	35%
nominal power	55W
-3dB frequency bandwidth	7Hz - 95kHz
power bandwidth (-3dB) starting at	19Hz
primary inductance	1150H
primary leakage ind.	7mH
primary capacitance	580pF
primary DC-resistance	96Ω
secondary DC-resistance	0.15Ω(4Ω) 0.23(8Ω)
dimensions od x height	126mm x 66mm
mounting	M8x20 center bolt
weight	2.6kg
Leadlength	200mm



Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands

P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457

info@amplimo.nl  
http://www.amplimo.nl

HB


March 2020

# 55PP4K5H

Wide bandwidth toroidal  
tube output transformer

© Copyright Amplimo BV

### frequency response

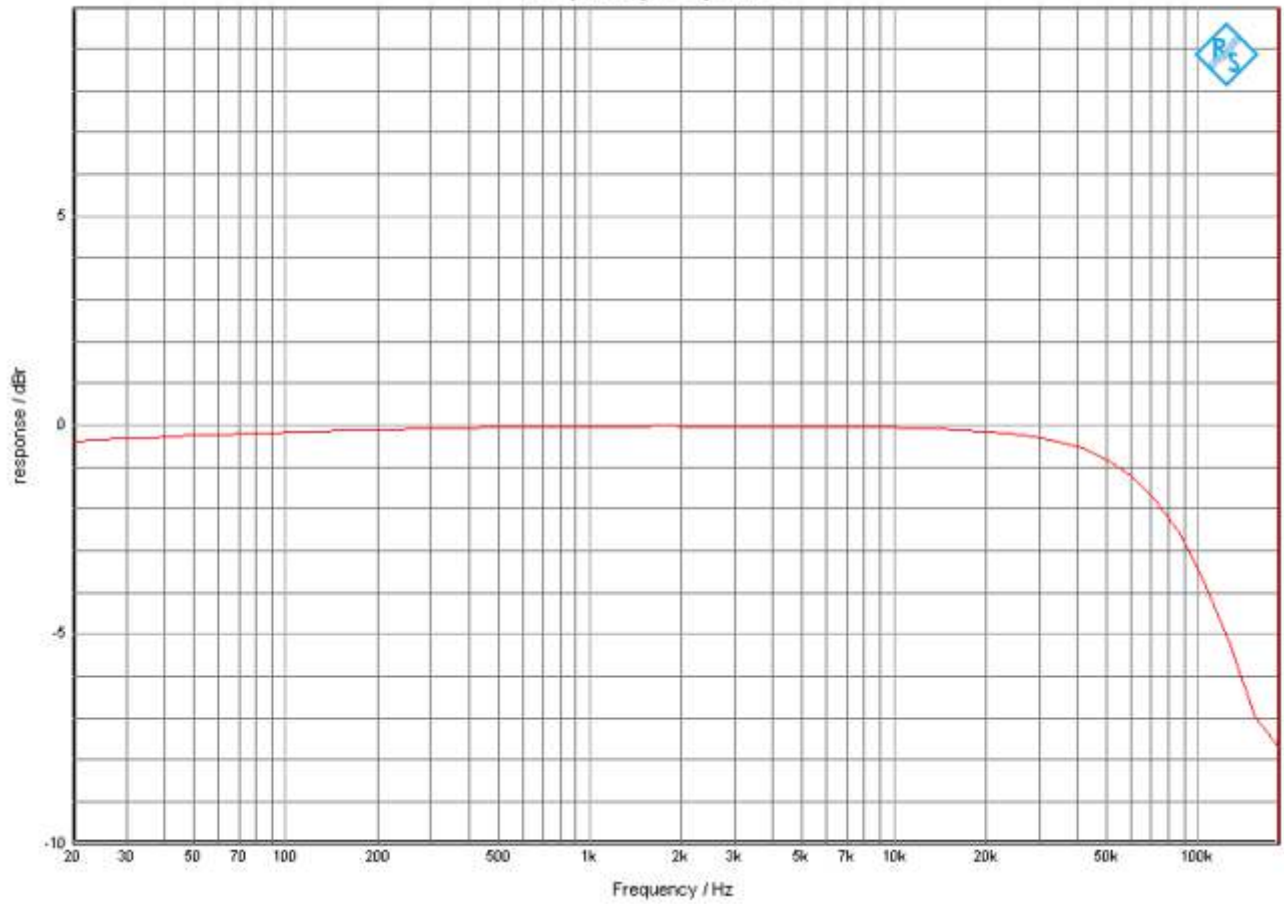

### Phase response

