


# AMPLIMO Toroidal Output Transformer type 50PP4K0G



primary impedance	4000 Ω
secondary impedance	0 - 4 - 8 - 16 Ω
turns ratio	31.8(4Ω)-22.4(8Ω)-15.9(16Ω)
nominal power	50W
-3dB frequency bandwidth (1mW)	8Hz - 167kHz
power bandwidth (-3dB) starting at	50Hz (50W)
primary inductance	465H
primary leakage ind.	3mH
primary capacitance	530pF
primary DC-resistance	49Ω
secondary DC-resistance	80mΩ(4Ω) 132mΩ(8Ω) 234mΩ(8Ω)
dimensions od x height	91mm x 44mm
mounting	toroidal clamp & washers
weight	1.0kg

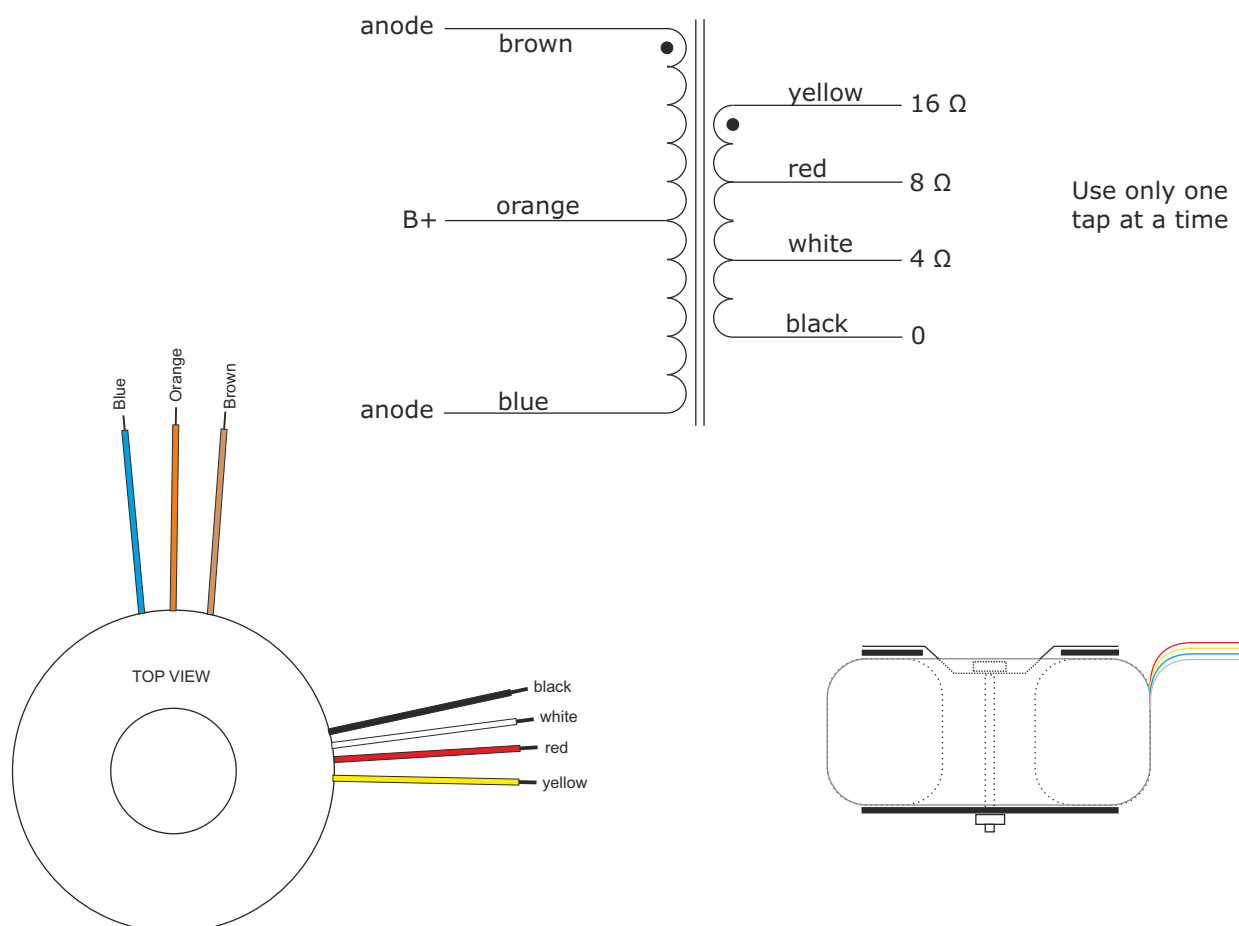

Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands

P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457

info@amplimo.nl  
<http://www.amplimo.nl>

HB

May 2020

## 50PP4K0G

Wide bandwith toroidal  
tube output transformer

© Copyright Amplimo BV

