






### Toroidal transformer type 08010

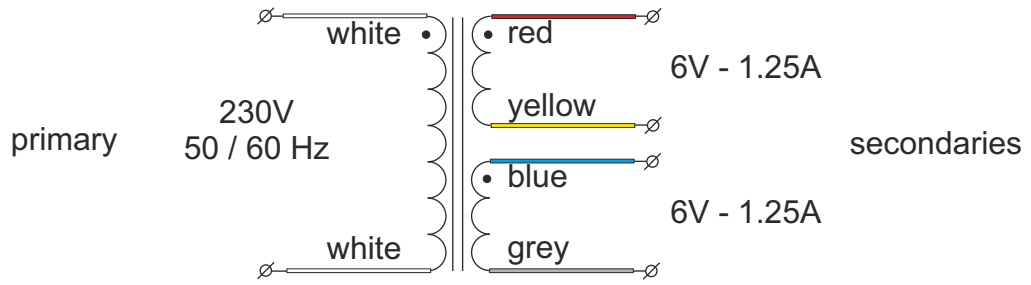

serial operation to double the secondary voltage

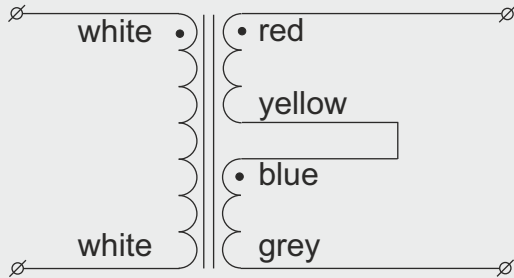

parallel operation to double the secondary current

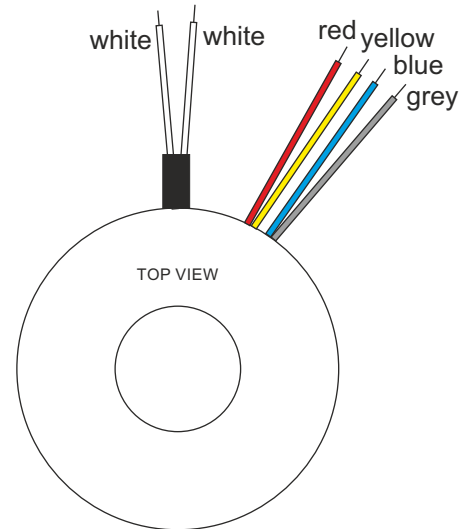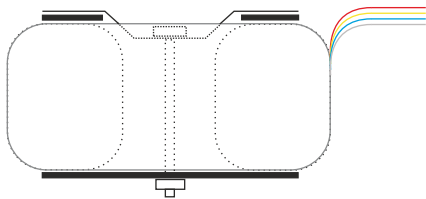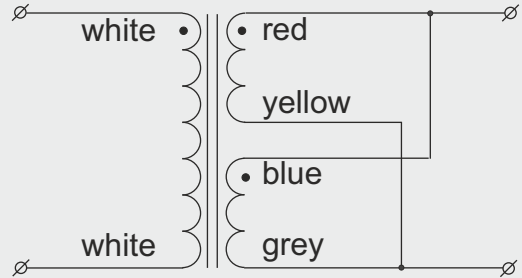

Power rating 15VA  
 Primary voltage 230VAC - 50/60Hz  
 Secondary voltages 2x 6V - 1.25A  
 Regulation 19%


Diameter 60mm  
 Height 28mm  
 Weight 0.31kg

Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø50mm  
 2 neoprene washers Ø50mm  
 1 bolt M5x40mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01  
 UL/CSA approvals, UL filenumber E320377.  
 CE, RoHS-compliant

Time lag fuses to be used.  
 Primary: 0.08A, 5x20mm, IEC127, high I<sup>2</sup>t value  
 Secondary: none

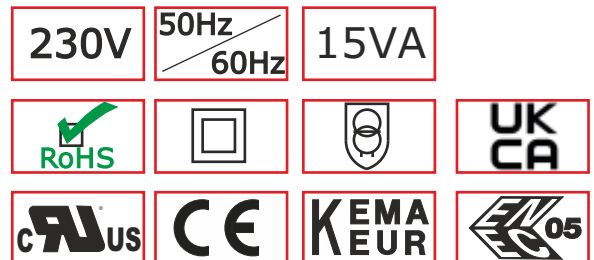

Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 27  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
 Fax+31 (0)545 28 3457

info@amplimo.nl  
 http://www.amplimo.nl

HB Oct 2010  
 HB Jan 2023

© Copyright Amplimo BV

**08010**  
 toroidal transformer  
 15VA