
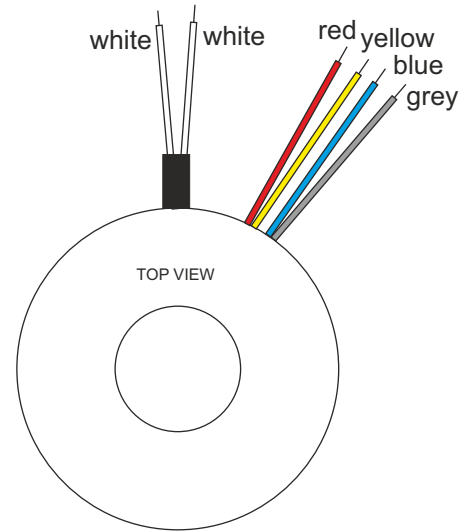
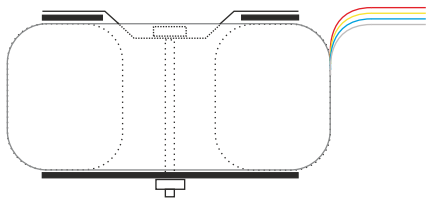
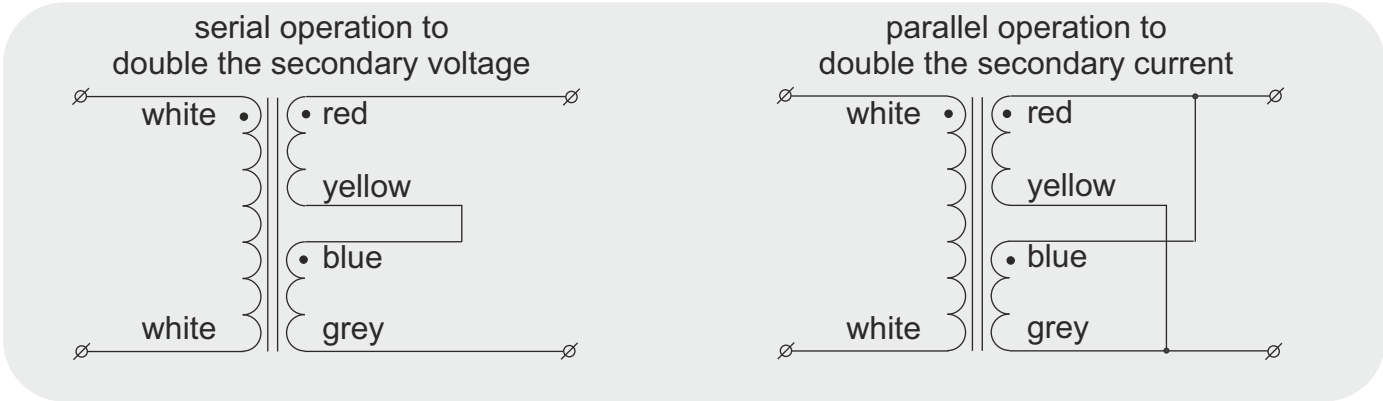


Toroidal transformer type 08017

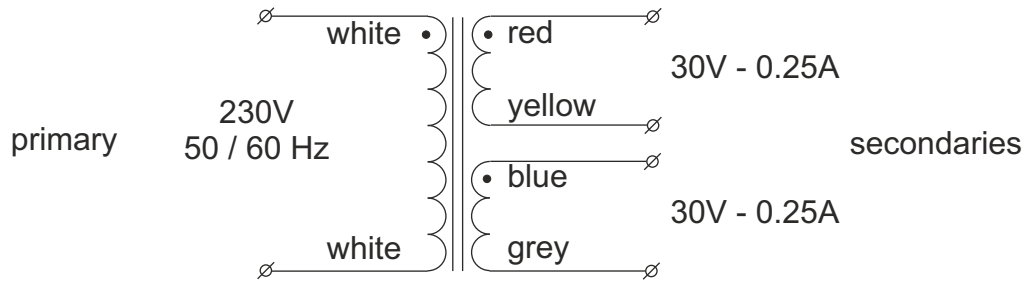


Power rating	15VA
Primary voltage	230VAC - 50/60Hz
Secondary voltages	2x 30V - 0.25A
Regulation	19%
Diameter	60mm
Height	28mm
Weight	0.31kg

Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø50mm
2 neoprene washers Ø50mm
1 bolt M5x40mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
UL/CSA approvals, UL filenumber E320377.
CE, RoHS-compliant

Time lag fuses to be used.
Primary: 0.08A, 5x20mm, IEC127, high I²t value
Secondary: none

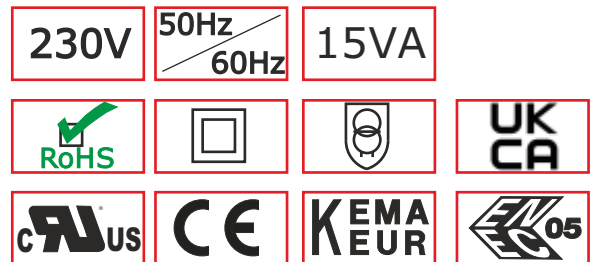

	Industrieweg 14 NL-7161BX NEEDE The Netherlands P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 info@amplimo.nl https://www.amplimo.nl	HB HB	Oct 2010 Jan 2023	08017 toroidal transformer 15VA
	© Copyright Amplimo BV			