






Toroidal transformer type 18011

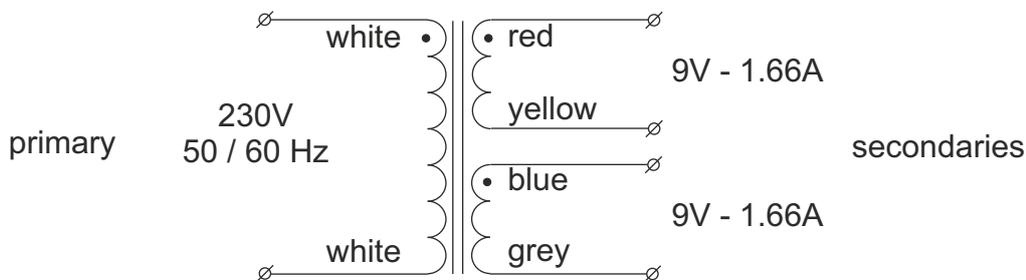

serial operation to double the secondary voltage

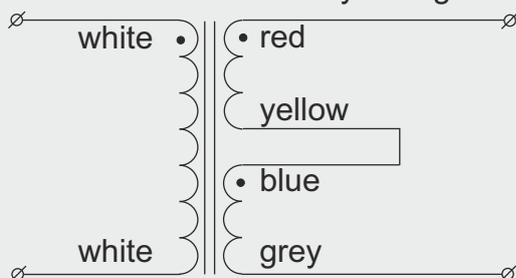

parallel operation to double the secondary current

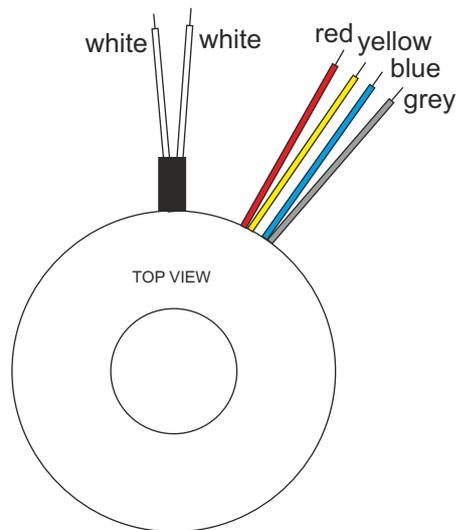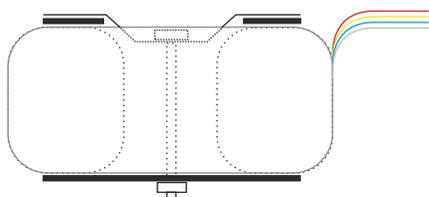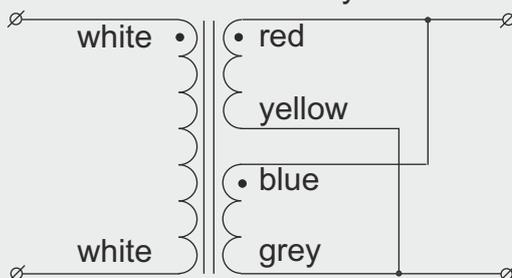


Power rating 30VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 9V - 1.66A
 Regulation 17%

Diameter 70mm
 Height 32mm
 Weight 0.44kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø50mm
 2 neoprene washers Ø50mm
 1 bolt M5x40mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
 UL/CSA approvals, UL filenumber E320377.
 CE, RoHS-compliant

Time lag fuses to be used.
 Primary: 0.16A, 5x20mm, IEC127, high I²t value
 Secondary: none

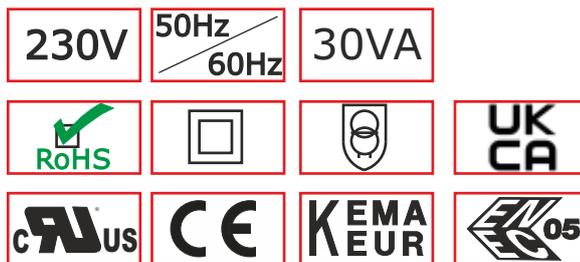

HB	Oct 2010
©	Copyright Amplimo BV

18011
 toroidal transformer
 30VA