






Toroidal transformer type 28021

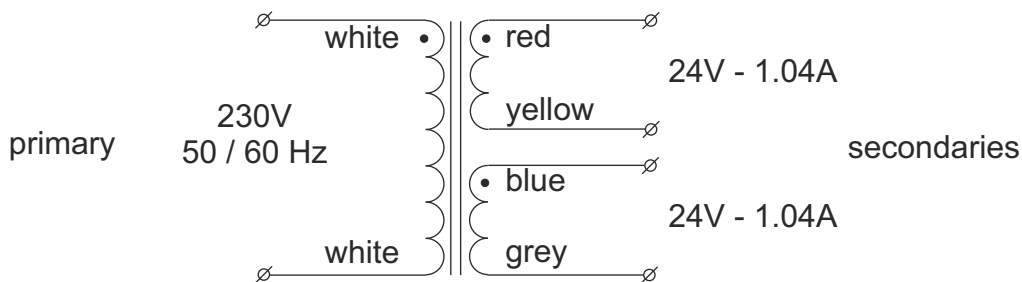

serial operation to double the secondary voltage

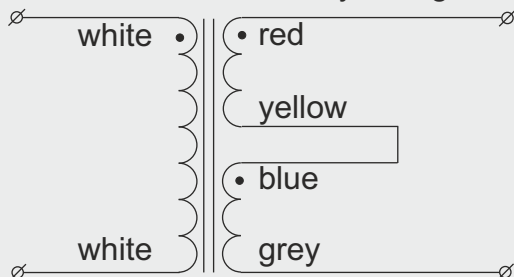

parallel operation to double the secondary current

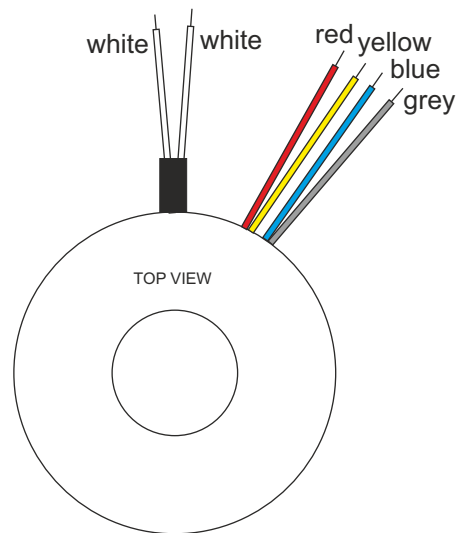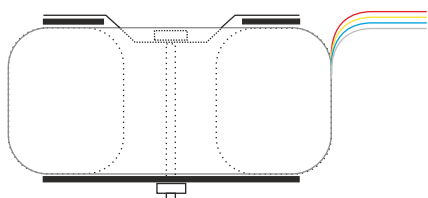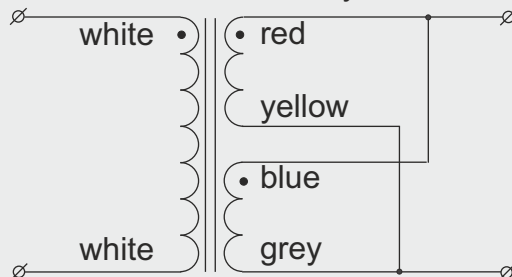


Power rating 50VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 24V - 1.04A
Regulation 12%

Diameter 80mm
Height 39mm
Weight 0.74kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø70mm
2 neoprene washers Ø70mm
1 bolt M5x50mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
UL/CSA approvals, UL filenumber E320377.
CE, RoHS-compliant

Time lag fuses to be used.
Primary: 0.25A, 5x20mm, IEC127, high I²t value
Secondary: none

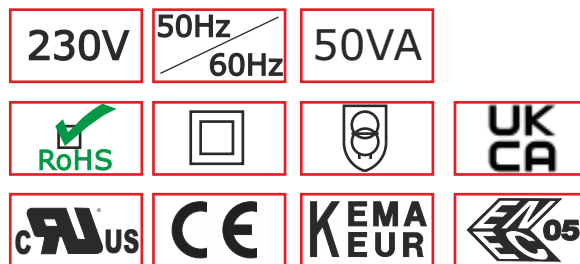

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456

info@amplimo.nl
https://www.amplimo.nl

HB	Dec 2013
HB	Jan 2023
©	Copyright Amplimo BV

28021

toroidal transformer
50VA