






Toroidal transformer type 38013

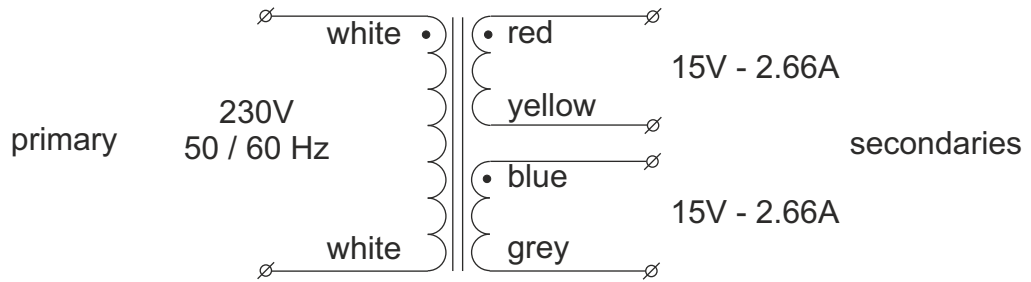

serial operation to
double the secondary voltage

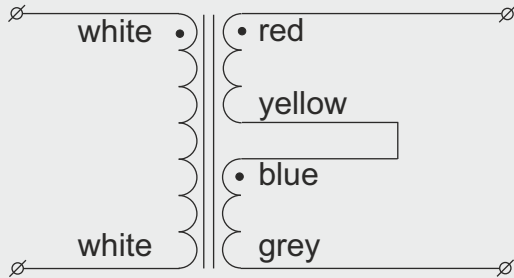

parallel operation to
double the secondary current

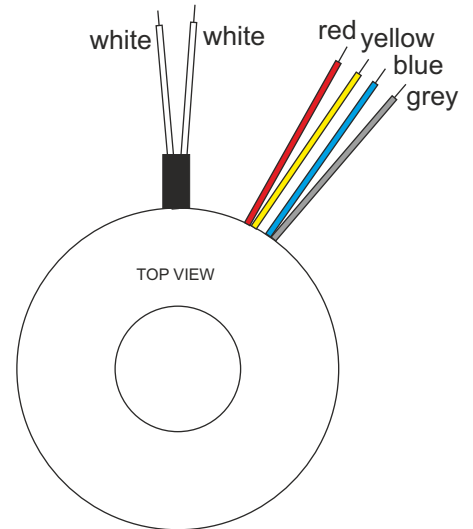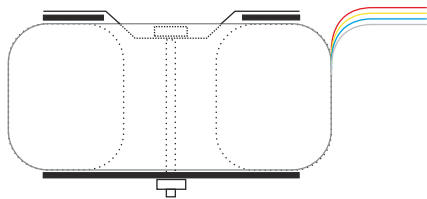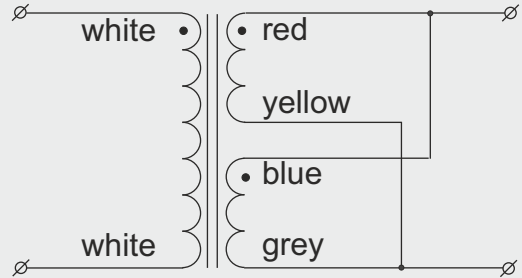

Power rating 80VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 15V - 2.66A
Regulation 10%

Diameter 91mm
Height 35mm
Weight 0.90kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø70mm
2 neoprene washers Ø70mm
1 bolt M5x40mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
UL/CSA approvals, UL filenumber E320377.
CE, RoHS-compliant

Time lag fuses to be used.
Primary: 0.4A, 5x20mm, IEC127, high I²t value
Secondary: none

230V 50Hz / 60Hz 80VA



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456

info@amplimo.nl
https://www.amplimo.nl

HB Oct 2010
HB Jan 2023

© Copyright Amplimo BV

38013

**toroidal transformer
80VA**