
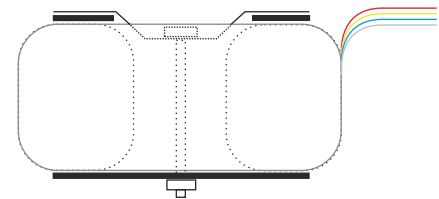
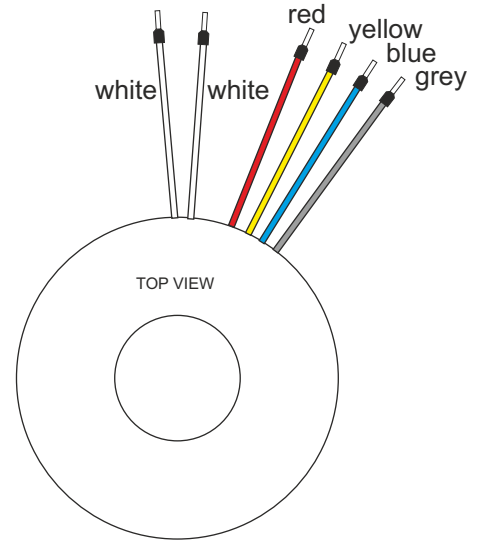
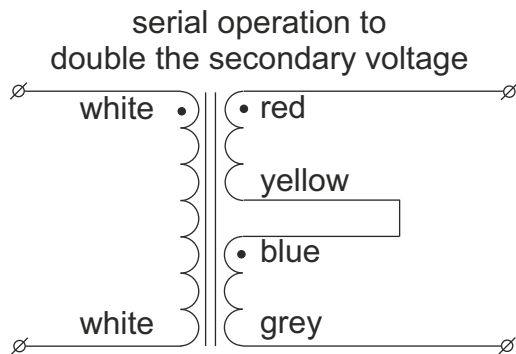
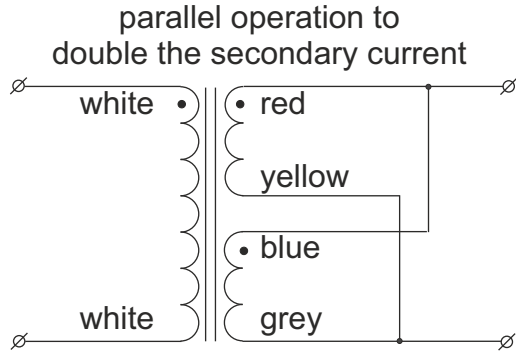


# Toroidal transformer type 68615

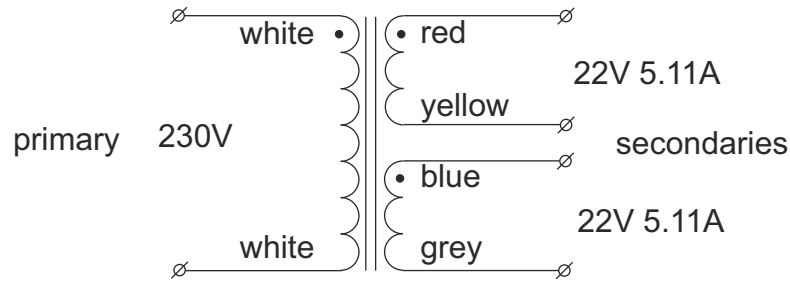

Diameter 113mm  
 Height 53mm  
 Weight 2.3kg

Height and weight are measured without mounting materials  
 All leads are approx 200mm long with insulated bootlace ferrules. Prim. LT07508 or equivalent. Sec. LT10008 or equivalent.

Supplied mounting materials:  
 1 metal washer  
 2 neoprene washers  
 1 bolt with nut

According to EN61558. With CE and UL/CSA approvals  
 UL filenumber E311200  
 RoHS-compliant

Time lag fuses to be used.  
 Primary: 1A, 5x20mm, IEC127, I<sub>t</sub> >= 15  
 Secondary: none

Type number	primary	secondaries voltage	current
68615	230V	2x 22V	5.11A

All voltages are under full ohmic load.  
 Regulation : 7.0%

	P/N AMP-0225022		
	TYPE 68615		
	BATCH 00000	50/60Hz	
	MADE IN CHINA		
PRI. FUSE 1A T. IEC127 5x20mm I <sub>t</sub> >=15 PRI. 230VAC WHITE - WHITE SEC. 2x 22VAC 5.11A RED-YELLOW / BLUE-GREY			

	Industrieweg 14 NL-7161BX NEEDE The Netherlands  P O - Box 27 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457  info@amplimo.nl http://www.amplimo.nl	HB	Aug-2022	<b>68615</b> P/N: AMP-0225022
				<b>toroidal transformer</b> <b>225VA</b>
	© Copyright Amplimo BV			