






### Toroidal transformer type 78026

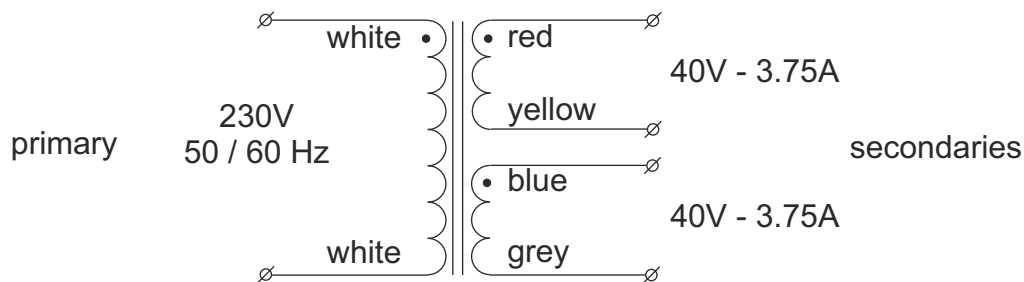

serial operation to double the secondary voltage

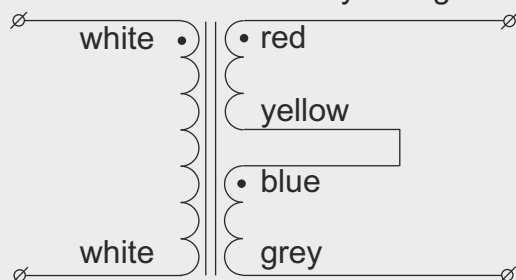

parallel operation to double the secondary current

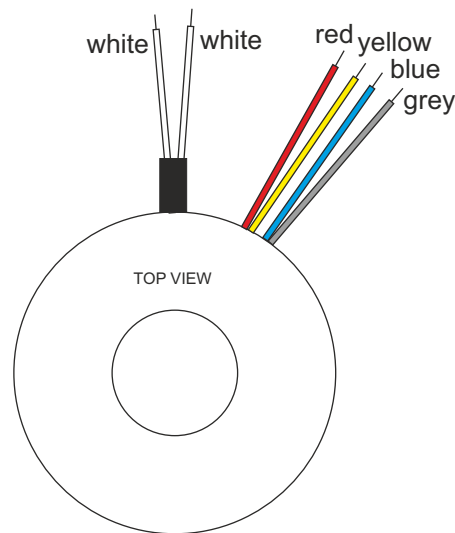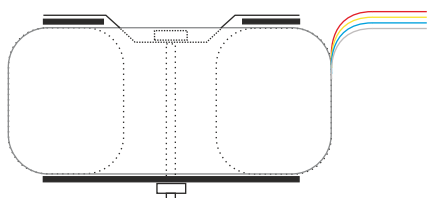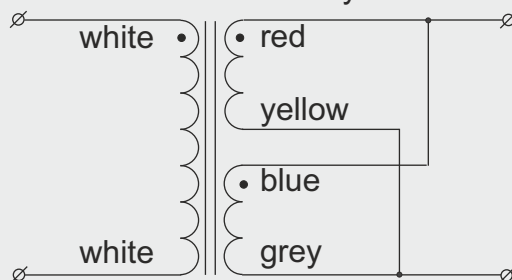


Power rating 300VA  
 Primary voltage 230VAC - 50/60Hz  
 Secondary voltages 2x 40V - 3.75A  
 Regulation 5%

Diameter 121mm  
 Height 56mm  
 Weight 2.9kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø90mm  
 2 neoprene washers Ø90mm  
 1 bolt M5x70mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01  
 UL/CSA approvals, UL filenumber E320377.  
 CE, RoHS-compliant

Time lag fuses to be used.  
 Primary: 1.6A, 5x20mm, IEC127, high I<sup>2</sup>t value  
 Secondary: none

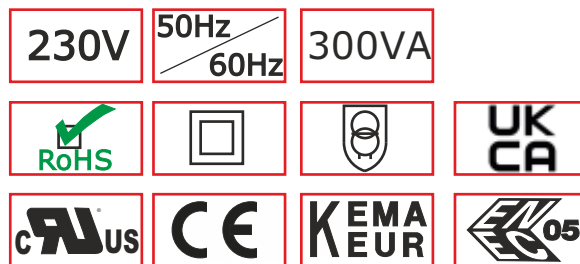

Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands  
  
 P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
  
 info@amplimo.nl  
 https://www.amplimo.nl

|    |                      |
|----|----------------------|
| HB | Oct 2010             |
| HB | Mar 2023             |
|    |                      |
|    |                      |
| ©  | Copyright Amplimo BV |

**78026**  
 toroidal transformer  
 300VA