






### Toroidal transformer type 88014

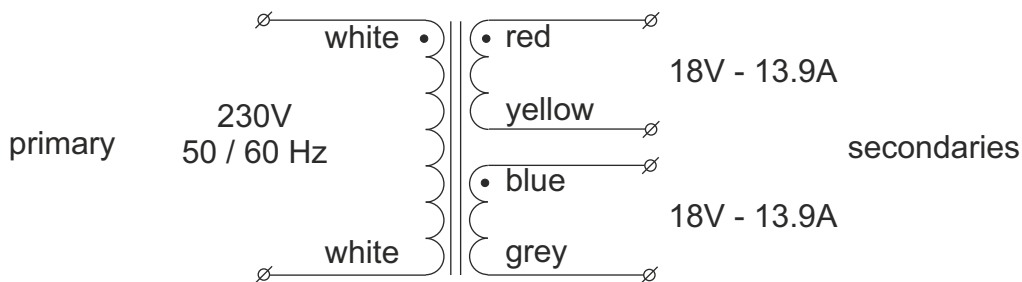

serial operation to double the secondary voltage

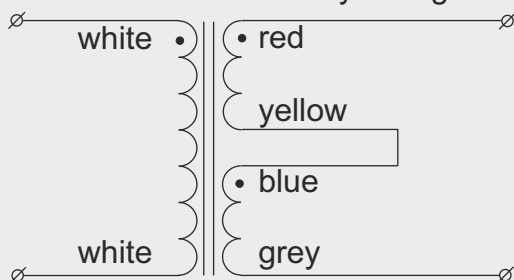

parallel operation to double the secondary current

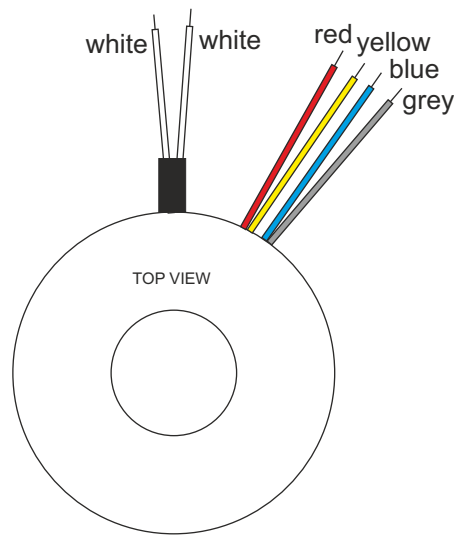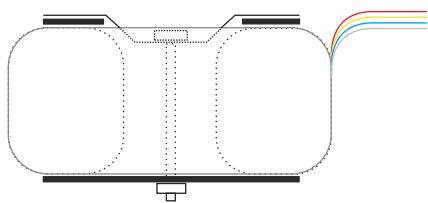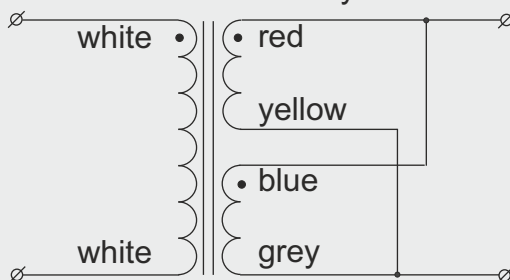


Power rating 500VA  
Primary voltage 230VAC - 50/60Hz  
Secondary voltages 2x 18V - 13.9A  
Regulation 4.5%

Diameter 135mm  
Height 63mm  
Weight 4.2kg  
Height and weight are measured without mounting materials  
All leads are solid and approx 200mm long

Supplied mounting materials:  
1 metal washer Ø110mm  
2 neoprene washers Ø110mm  
1 bolt M8x70mm with nut  
KEMA KEUR, ENEC approvals, certificate 2159403.01  
UL/CSA approvals, UL filenumber E320377.  
CE, RoHS-compliant

Time lag fuses to be used.  
Primary: 2.5A, 5x20mm, IEC127, high I<sup>2</sup>t value in series with two NTC resistors type NTC5.  
Secondary: none

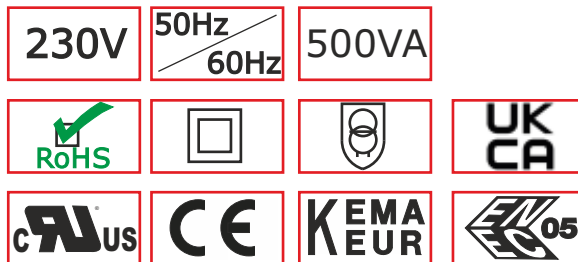

Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands  
  
P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 28 3456  
  
info@amplimo.nl  
https://www.amplimo.nl

HB	Oct 2010
HB	Mar 2023
©	Copyright Amplimo BV

**88014**  
**toroidal transformer**  
**500VA**