






### Toroidal transformer type 88070

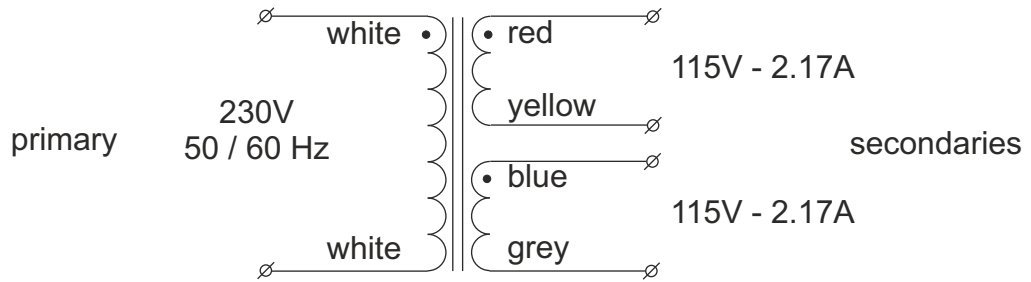

#### serial operation to double the secondary voltage

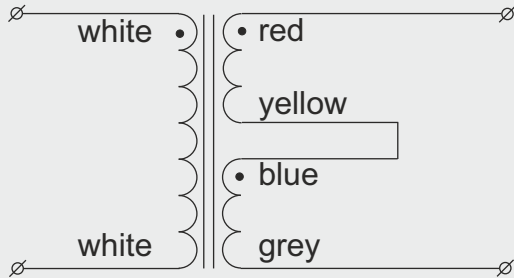

#### parallel operation to double the secondary current

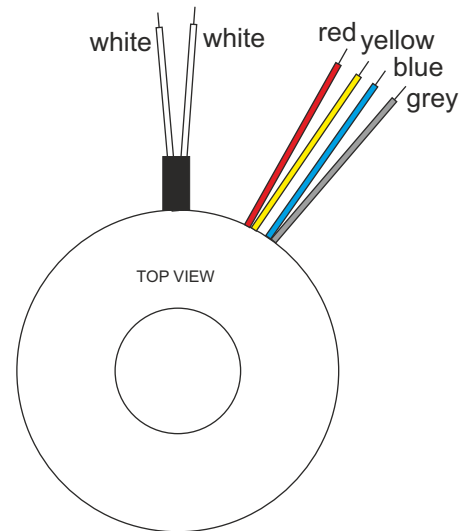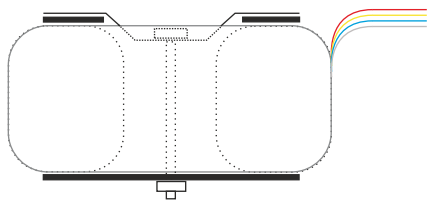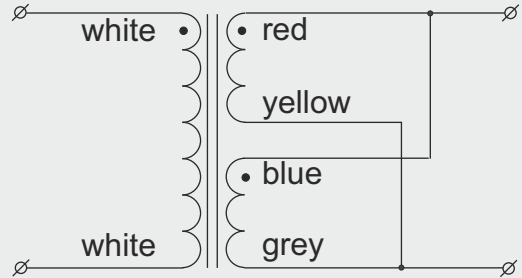


Power rating 500VA  
 Primary voltage 230VAC - 50/60Hz  
 Secondary voltages 2x 115V - 2.17A  
 Regulation 4.5%

Diameter 135mm  
 Height 63mm  
 Weight 4.2kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø110mm  
 2 neoprene washers Ø110mm  
 1 bolt M8x70mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.02  
 UL/CSA approvals, UL filenumber E320377.  
 CE, RoHS-compliant

Time lag fuses to be used.  
 Primary: 2.5A, 5x20mm, IEC127, high I<sup>2</sup>t value in series with two NTC resistors type NTC5.  
 Secondary: none

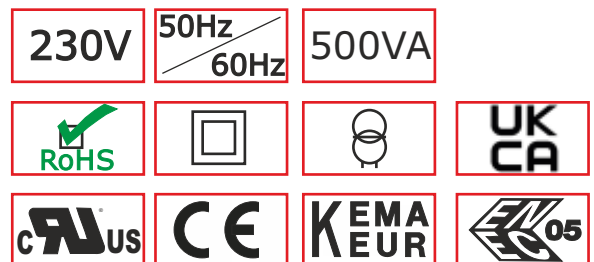

Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands  
  
 P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
  
 info@amplimo.nl  
 https://www.amplimo.nl

HB	Oct 2010
HB	Mar 2023
©	Copyright Amplimo BV

**88070**  
 toroidal transformer  
 500VA