
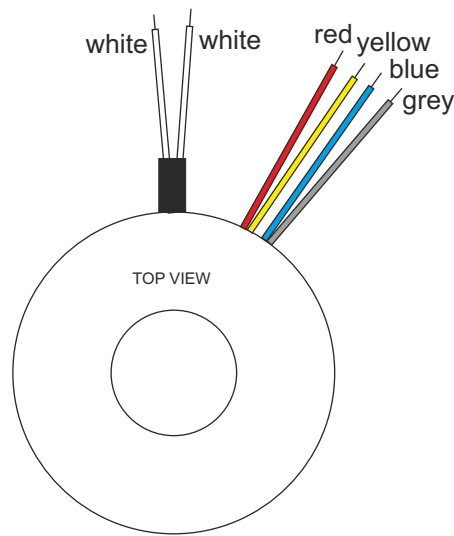
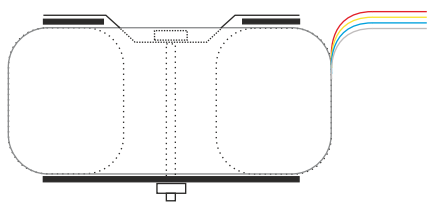
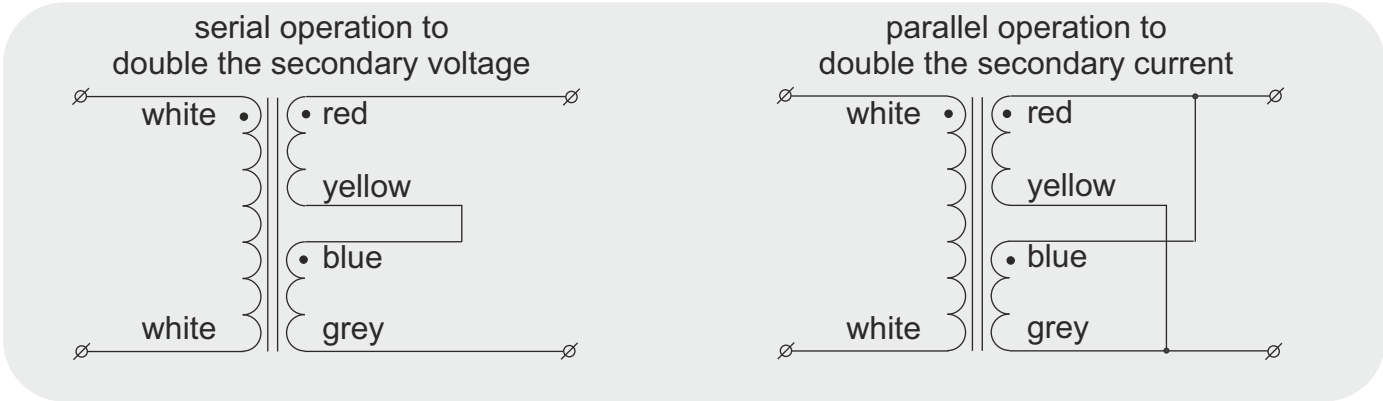


Toroidal transformer type Z8018

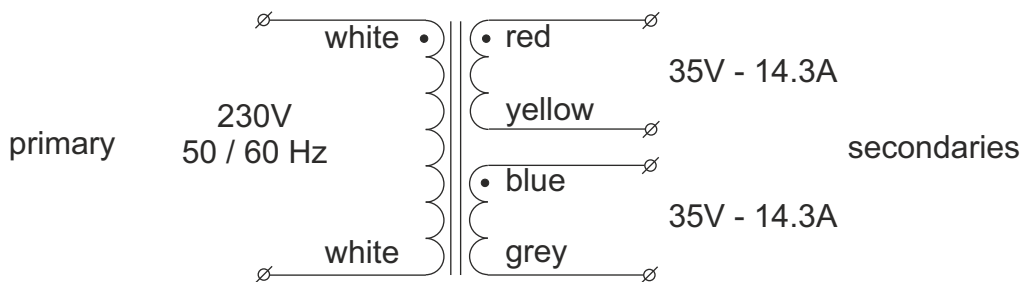


Power rating 1000VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 35V -14.3A
Regulation 3.5%

Diameter 160mm
Height 72mm
Weight 7.54kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø110mm
 2 neoprene washers Ø110mm
 1 bolt M8x90mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
 UL/CSA approvals, UL filenumber E320377.
 CE, RoHS-compliant

Time lag fuses to be used.
 Primary: 5A, 5x20mm, IEC127, high I²t value in series with two NTC resistors type NTC5.
 Secondary: none

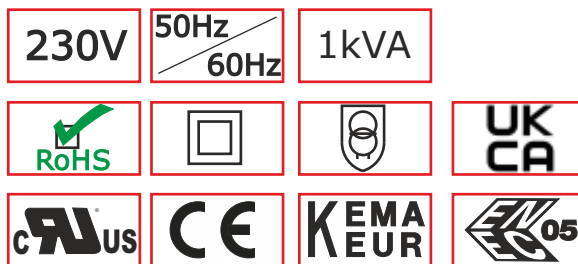

	Industrieweg 14 NL-7161BX NEEDE The Netherlands P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 info@amplimo.nl https://www.amplimo.nl	HB HB	Oct 2010 Apr 2023	<h1>Z8018</h1> <p>toroidal transformer 1000VA</p>
	© Copyright Amplimo BV			