






Toroidal transformer type Z8044

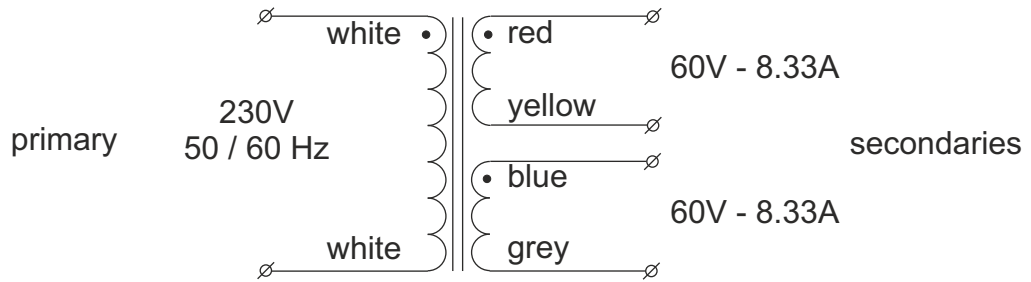

serial operation to double the secondary voltage

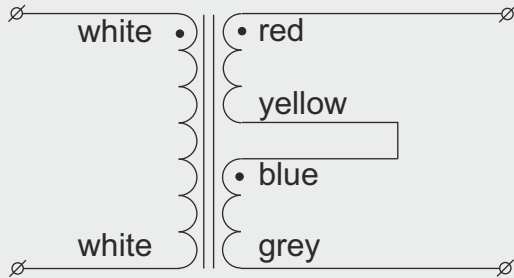

parallel operation to double the secondary current

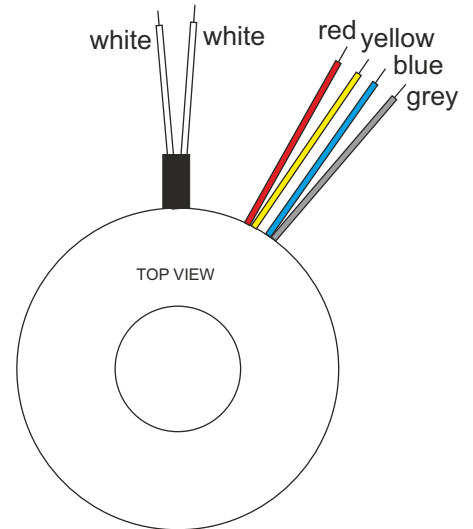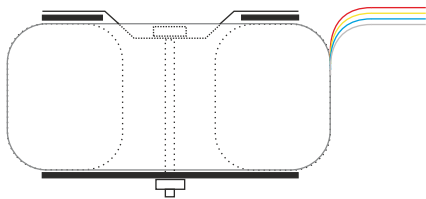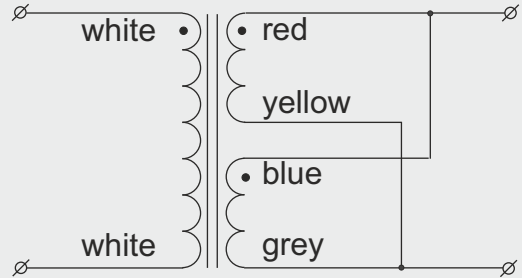


Power rating 1000VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 60V - 8.33A
Regulation 3.5%

Diameter 160mm
Height 72mm
Weight 7.54kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø110mm
2 neoprene washers Ø110mm
1 bolt M8x90mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.02
UL/CSA approvals, UL filenumber E320377.
CE, RoHS-compliant

Time lag fuses to be used.
Primary: 5A, 5x20mm, IEC127, high I²t value in series with two NTC resistors type NTC5.
Secondary: none

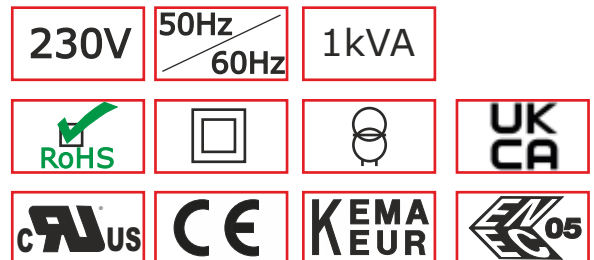

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456

info@amplimo.nl
https://www.amplimo.nl

HB	Oct 2010
HB	Apr 2023
©	Copyright Amplimo BV

Z8044

toroidal transformer
1000VA