





Toroidal transformer type 1N242

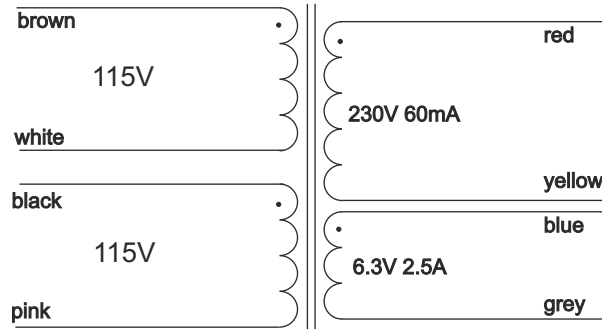

primaries in parallel
for 115V operation



primaries in series
for 230V operation

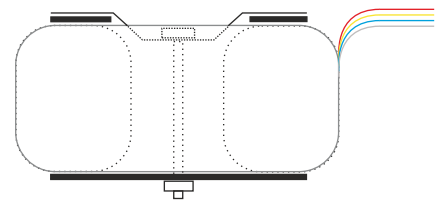

Diameter 70 mm
Height 34 mm
Weight 0.44kg

Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:
1 metal washer Ø5cm
2 neoprene washers Ø5cm
1 bolt M5x40 with nut


With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.

Primary:

For 230V mains : 0.16A 5x20mm IEC127 high I²t-value.
For 115V mains: 0.315A 5x20mm IEC127 high I²t-value.

Secondary: additional protection required for 230V secondary

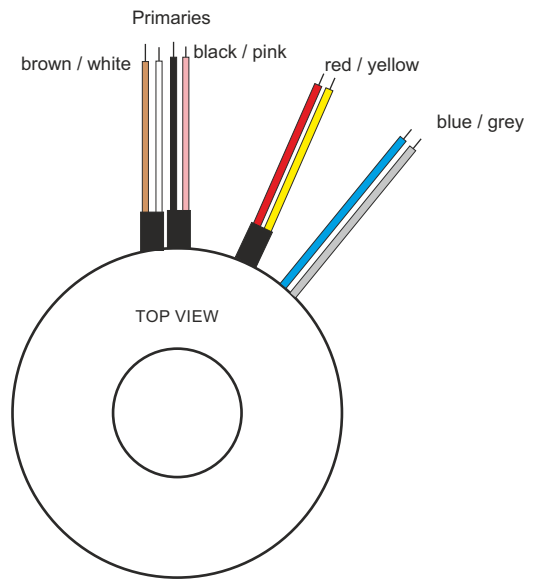

Type number	primary	secondaries voltage	current
1N242	2x 115V	230V 6.3V	60mA 2.5A

All voltages are under full ohmic load.
Regulation : 17%
Power rating : 30VA

30VA

115V
230V

KEMA KEUR

50Hz
60Hz

UL US

CE

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	March 2010	<h1 style="margin: 0;">1N242</h1>	
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457				<h2 style="margin: 0;">toroidal power transformer for valve-amplifiers</h2>
	info@amplimo.nl http://www.amplimo.nl				
	© Copyright Amplimo BV				