

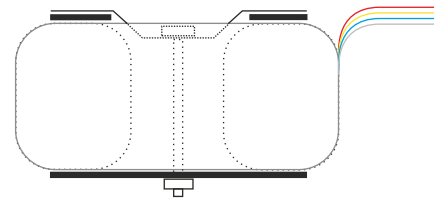




Toroidal transformer type 2N1586

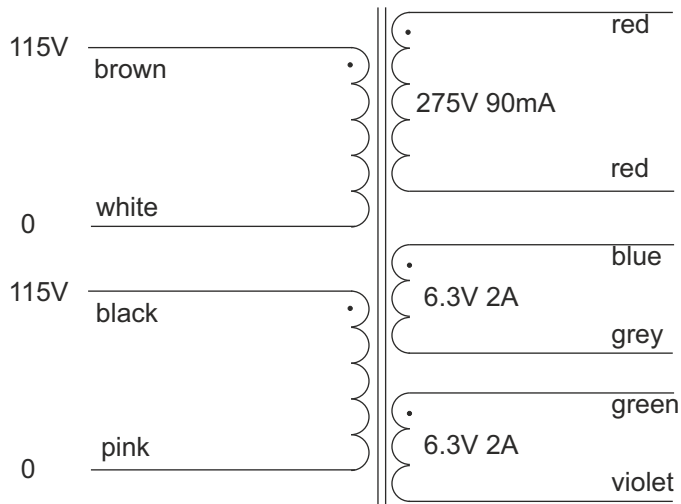

primaries in parallel
for 115V operation



primaries in series
for 230V operation

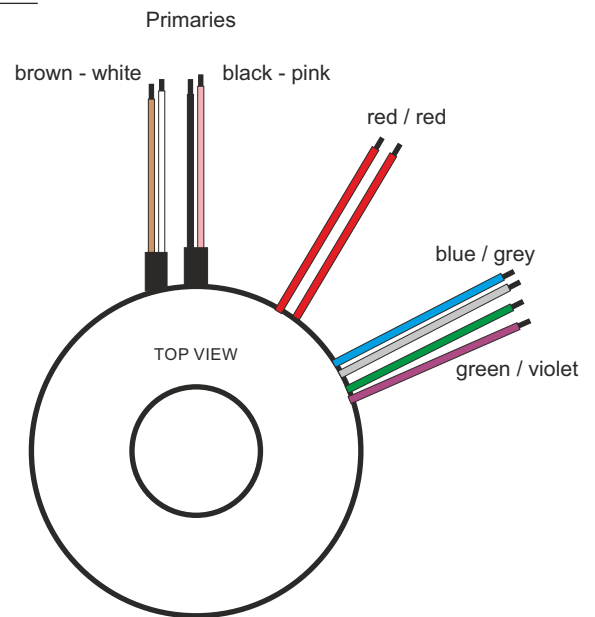

Diameter 85 mm
Height 43mm
Weight 0.8kg
Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:

- 1 metal washer Ø7cm
- 2 neoprene washers Ø7cm
- 1 bolt M5x50 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.




Primary:

For 115V mains : 0.5A 5x20mm IEC127 high I²t-value.
For 230V mains : 0.25A 5x20mm IEC127 high I²t-value.

Secondary: additional protection required for each secondary

Type number	primary	secondaries voltage	current
2N1586	2x 115V	275V 6.3V 6.3V	90mA 2A 2A

All voltages are under full ohmic load.
Regulation : 12%



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
<http://www.amplimo.nl>

HB
HB

February 2013
November 2016

2N1586

toroidal power transformer
for valve-amplifiers

© Copyright Amplimo BV