

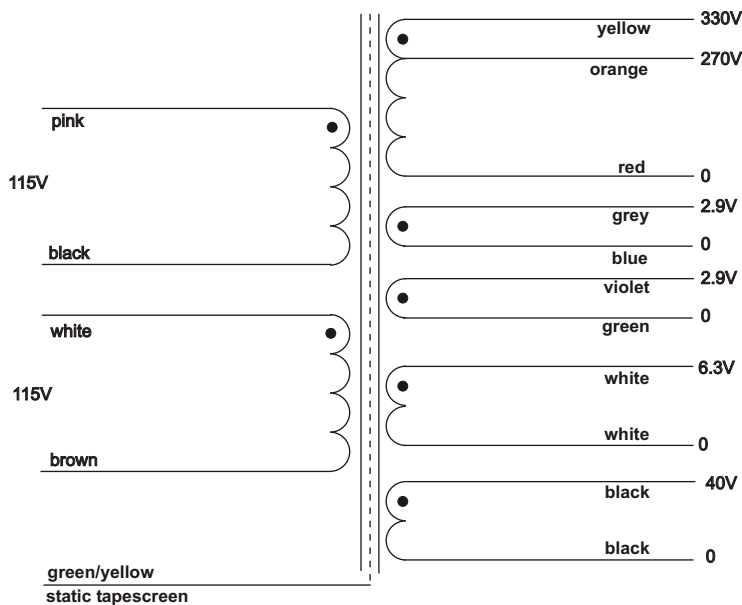



Toroidal transformer type 4N1583M

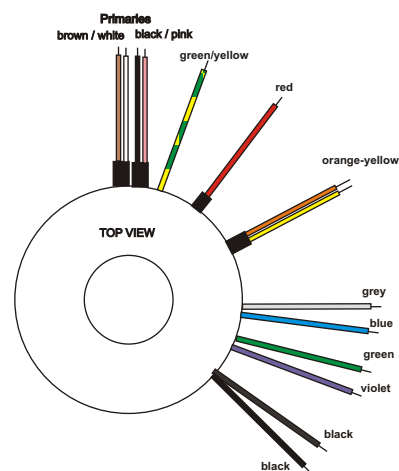


Only one tap used at a time



primaries in parallel for 115V operation



primaries in series for 230V operation



Diameter 101mm
Height 49mm
Weight 1.8kg

Height and weight are measured without mounting materials

All leads are approx.200mm long

Supplied mounting materials:

- 1 metal washer Ø7cm
- 2 neoprene washers Ø7cm
- 1 bolt M5x55 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 2027348.03, UL filenumber E179800.

4N1583M
primary 115V brown - white
115V black - pink
Static tapescreen green/yellow
0 - 270V - 330V 150mA
red-orange-yellow
0 - 2.9V 4A
blue - grey
0 - 2.9V 4A
green - violet
0 - 6.3V 1A
white - white
0 - 40V 100mA
black - black

Audio-Grade !
Magnetic shielding
All voltages are under full ohmic load.
Regulation : 5 - 9%



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

Dec 2007

4N1583M

toroidal power transformer
for valve Pre-amplifiers

© Copyright Amplimo BV