
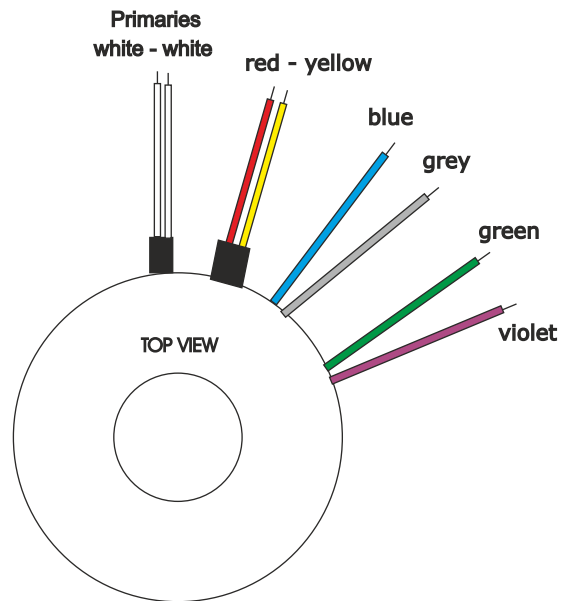
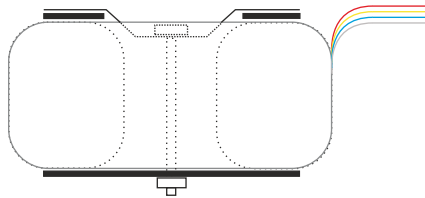


# Toroidal transformer type 4N1888

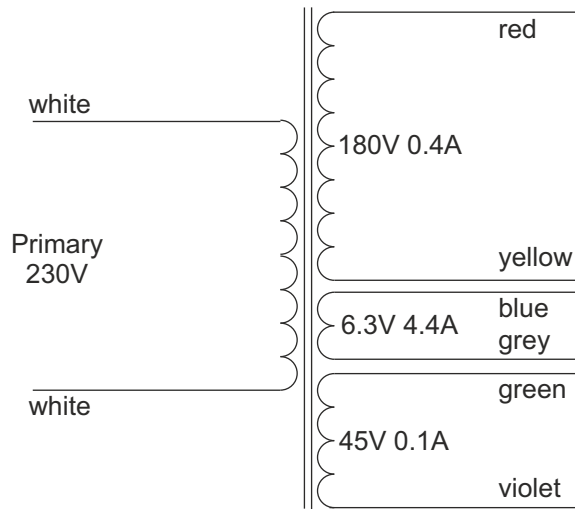

Diameter 95mm  
 Height 53mm  
 Weight 1.4kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx.200mm long

Supplied mounting materials:  
 1 metal washer Ø7cm  
 2 neoprene washers Ø7cm  
 1 bolt M5x60 with nut


With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
 Primary:  
 For 230V mains: 0.63A 5x20mm IEC127 high I<sup>2</sup>t-value.

Secondary: (180V-0.4A)0.4A, (6.3V-4.4A)5A, (45V-100mA)0,16A

Type number	primary	secondaries	
		voltage	current
4N1888	230V	180V	400mA
		6.3V	4.4A
		45V	0.1A

All voltages are under full ohmic load.  
 Regulation : 11% (7% on 45V sec.)

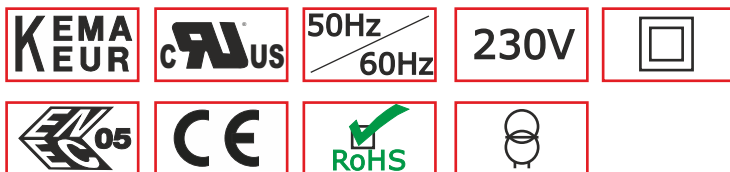

	Industrieweg 14 NL-7161BX NEEDE The Netherlands  P O - B o x 27 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457  info@amplimo.nl http://www.amplimo.nl	HB	November 2016	<h2>4N1888</h2> <p>toroidal power transformer                  for valve-amplifiers</p>
	© Copyright Amplimo BV			