






Toroidal transformer type 7B649

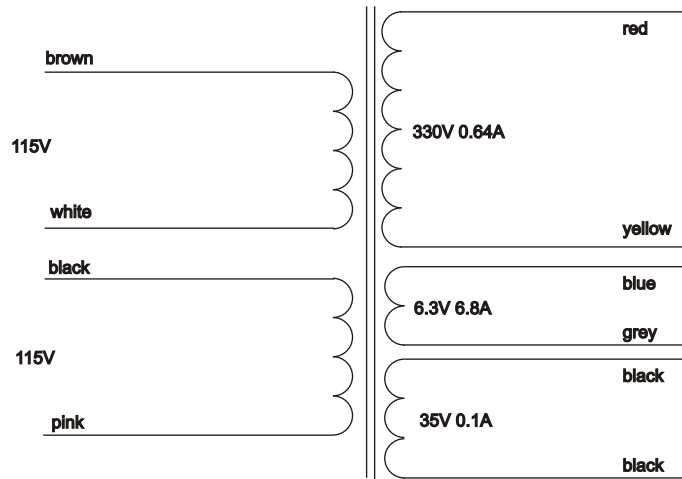

primaries in parallel
for 115V operation



primaries in series
for 230V operation

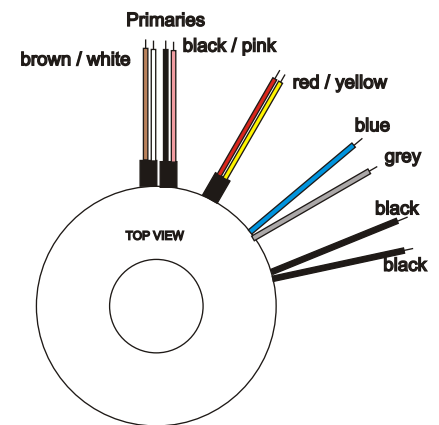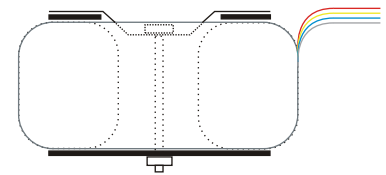

Diameter 123mm
Height 56mm
Weight 3kg
Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:
1 metal washer Ø9cm
2 neoprene washers Ø9cm
1 bolt M5x70 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
115V primary: 3.15A 5x20mm IEC127 I²t min.14 in series with 2 NTC-resistors type NTC2.5
230V primary: 1.6A 5x20mm IEC127 I²t min. 36
Secondary: (340V-640mA)800mA, (6.3V-6.8A)none, (35V-100mA)0,16A

Type number	primary	secondaries	
		voltage	current
7B649	2x 115V	330V	640mA
		6.3V	6.8A
		35V	0.1A

All voltages are under full ohmic load.
Regulation : 5%



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

Sept 2003

7B649

toroidal power transformer
for valve-amplifiers

© Copyright Amplimo BV