

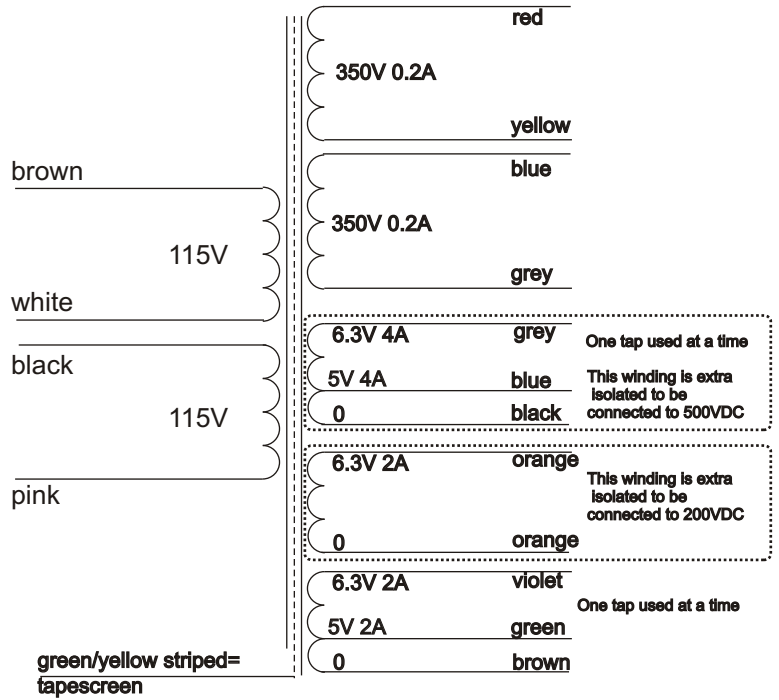



# Toroidal transformer type 7N1468

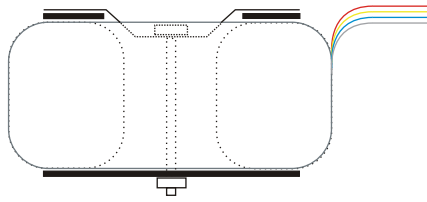

primaries in parallel for 115V operation



primaries in series for 230V operation




Diameter 130mm  
 Height 58mm  
 Weight 2.9kg  
 Height and weight are measured without mounting materials  
 All leads are approx. 200mm long

Supplied mounting materials:  
 1 metal washer Ø9cm  
 2 neoprene washers Ø9cm  
 1 bolt M5x70 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.  
 Primary:  
 For 115V mains : 2A 5x20mm IEC127 high I<sup>2</sup>t-value  
 For 230V mains: 1A 5x20mm IEC127 high I<sup>2</sup>t-value.

Secondary: additional protection is required for each secondary winding

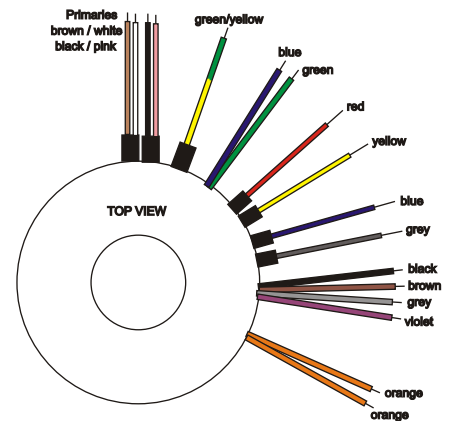

Type number	primary	secondaries voltage	current
7N1468	2x 115V	350V	200mA
		350V	200mA
		0 - 5 - 6.3V	4A
		6.3V	2A
		0 - 5 - 6.3V	2A

All voltages are under full ohmic load.  
Regulation : 6.5%



Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 283456  
 Fax+31 (0)545 283457

info@amplimo.nl  
 http://www.amplimo.nl

HB

February 2004

**7N1468**

toroidal power transformer for valve-amplifiers

© Copyright Amplimo BV