

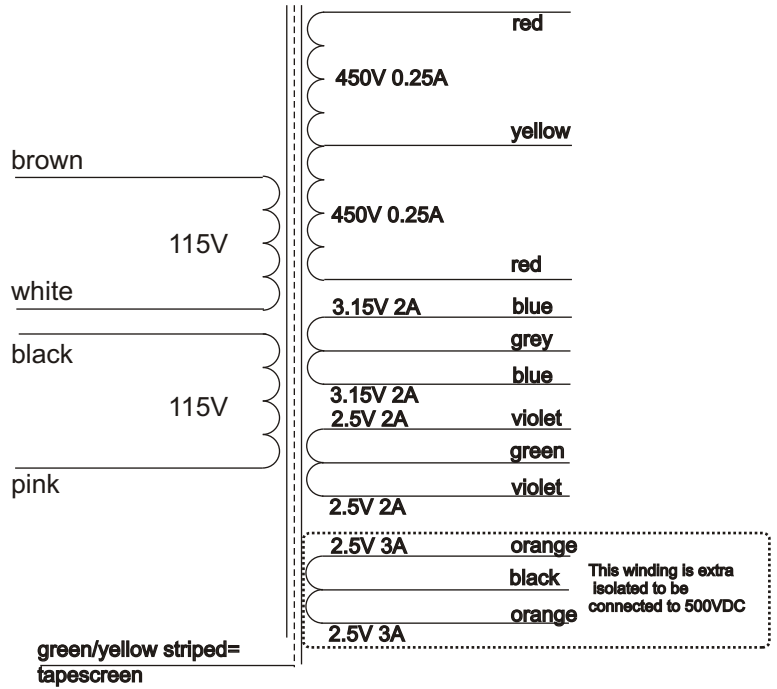



Toroidal transformer type 7N1476

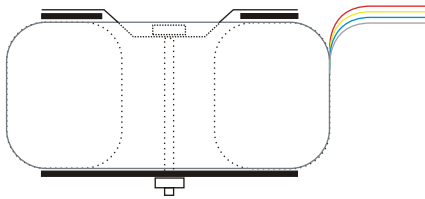

primaries in parallel for 115V operation



primaries in series for 230V operation




Diameter 126mm
 Height 59mm
 Weight 3kg
 Height and weight are measured without mounting materials
 All leads are approx. 200mm long

Supplied mounting materials:
 1 metal washer Ø9cm
 2 neoprene washers Ø9cm
 1 bolt M5x70 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
 Primary:
 For 115V mains : 2A 5x20mm IEC127 high I²t-value
 For 230V mains: 1A 5x20mm IEC127 high I²t-value.

Secondary: additional protection is required for each secondary winding

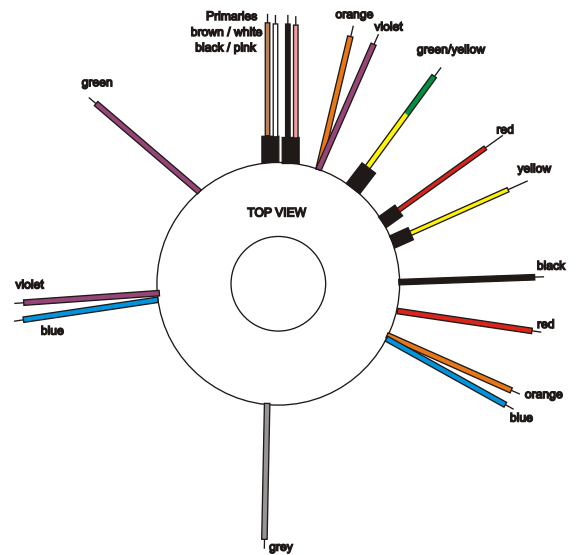

Type number	primary	secondaries voltage	current
7N1476	2x 115V	450V-0-450V	250mA
		3.15V-0-3.15V	2A
		2.5V-0-2.5V	2A
		2.5V-0-2.5V	3A

All voltages are under full ohmic load.
 Regulation : 6.5%



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 283456
 Fax+31 (0)545 283457

info@amplimo.nl
 http://www.amplimo.nl

HB

April 2004

7N1476

toroidal power transformer
 for valve-amplifiers

© Copyright Amplimo BV