





Toroidal transformer type 7N1492

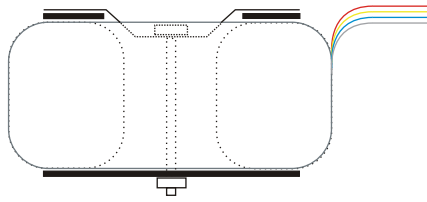

primaries in parallel
for 115V operation



primaries in series
for 230V operation

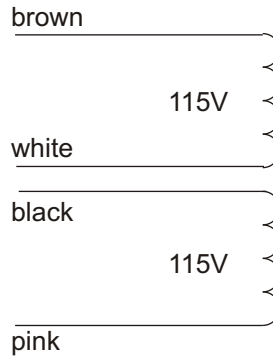

green/yellow striped=
tapescreen

orange	230V 0.1A	This winding is extra isolated to be connected to 500VDC
orange		
red	290V 0.5A	This winding is extra isolated to be connected to 200VDC
yellow		
blue	6.3V 2.5A	This winding is extra isolated to be connected to 200VDC
blue		
grey	6.3V 10A	
grey		
green	6.3V 1.2A	
green		
violet	15V 1.5A	
violet		
black	40V 0.1A	
black		

Diameter 126mm
Height 60mm
Weight 3kg
Height and weight are measured without mounting materials
All leads are approx. 200mm long

Supplied mounting materials:
1 metal washer Ø9cm
2 neoprene washers Ø9cm
1 bolt M5x70 with nut


With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.

Primary:

For 115V mains : 2A 5x20mm IEC127 high I²t-value
For 230V mains: 1A 5x20mm IEC127 high I²t-value.

Secondary: additional protection is required for each secondary winding

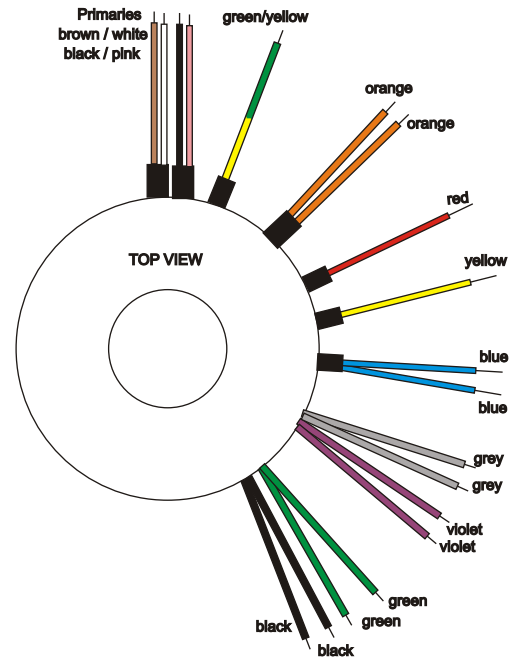

Type number	primary	secondaries voltage	current
7N1492	2x 115V	230V	100mA
		290V	500mA
		6.3V	2.5A
		6.3V	10A
		6.3V	1.2A
		15V	1.5A
		40V	100mA
		All voltages are under full ohmic load. Regulation : 6.5%	



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

November 2004

7N1492

toroidal power transformer
for valve-amplifiers

© Copyright Amplimo BV