

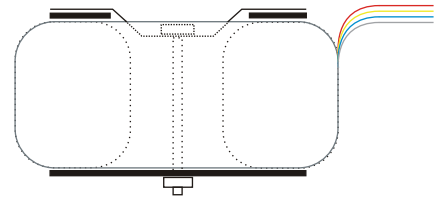




Toroidal transformer type 7N607

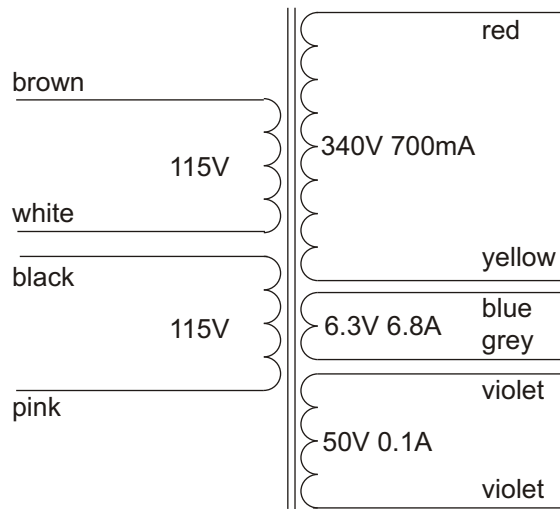

primaries in parallel
for 115V operation



primaries in series
for 230V operation

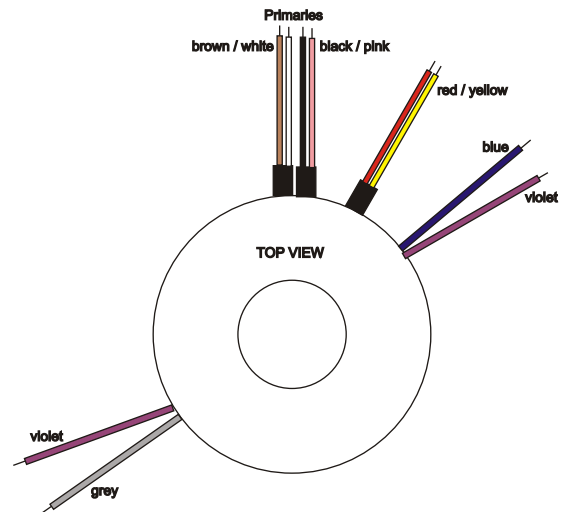

Diameter 123mm
Height 57mm
Weight 2.9kg
Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:
1 metal washer Ø9cm
2 neoprene washers Ø9cm
1 bolt M5x70 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
Primary:
For 115V mains : 3.15A 5x20mm IEC127 high I²t-value in series with 2 NTC-resistors type NTC2.5
For 230V mains: 1.6A 5x20mm IEC127 high I²t-value.

Secondary: (340V-700mA)800mA, (6.3V-6.8A)none, (50V-100mA)0,16A

Type number	primary	secondaries	
		voltage	current
7N607	2x 115V	340V	700mA
		6.3V	6.8A
		50V	0.1A
All voltages are under full ohmic load. Regulation : 5%			

Amendments:

april 2003: NGV-winding increased to 50V (was 40V)

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	April 2003	<h1 style="margin: 0;">7N607</h1> <p style="margin: 0;">toroidal power transformer for valve-amplifiers</p>
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457			
	info@amplimo.nl http://www.amplimo.nl			
	© Copyright Amplimo BV			