



AMPLIFIER MODULES
 VERSTERKER MODULEN
 TOROIDAL TRANSFORMERS
 RINGKERN TRANSFORMATOREN

Amplimo BV
 Industrieweg 14
 NL-7161BX NMEEDE
 The Netherlands

Telefoon +31 545 283456
 Fax +31 545 283457
 Internet www.amplimo.nl
 email info@amplimo.nl


Postbus 27
 7160AA NEEDE
 The Netherlands

Girorekening 38.12.499
 Rabobank rekening 31.33.11.250
 IBAN NL36RABO0313311250
 Handelsregister Enschede 06087186
 VAT nr. NL8071.67915B01

AMPLIMO

Toroidal power-transformer type VN995S for valve amplifiers

CONNECTIONS		
Primary	230V 50/60Hz	white - white
static tapescreen between primary and secondary windings		green / yellow striped
Secondaries	320V 0.8A	red - red
	360V 0.4A	orange - orange
	6.3V 6.4A	blue - blue
	6.3V 3A	black - black
	• 6.3V 2.5A	yellow - yellow
	55V 0.1A	violet - violet
	15V 0.1A	grey - grey
Regulation	approx. 4%	
<ul style="list-style-type: none"> This winding is extra isolated to be connected to max. 500VDC With KEMA KEUR, ENEC, CE and UL/CSA approvals.		
Special low noise design.		

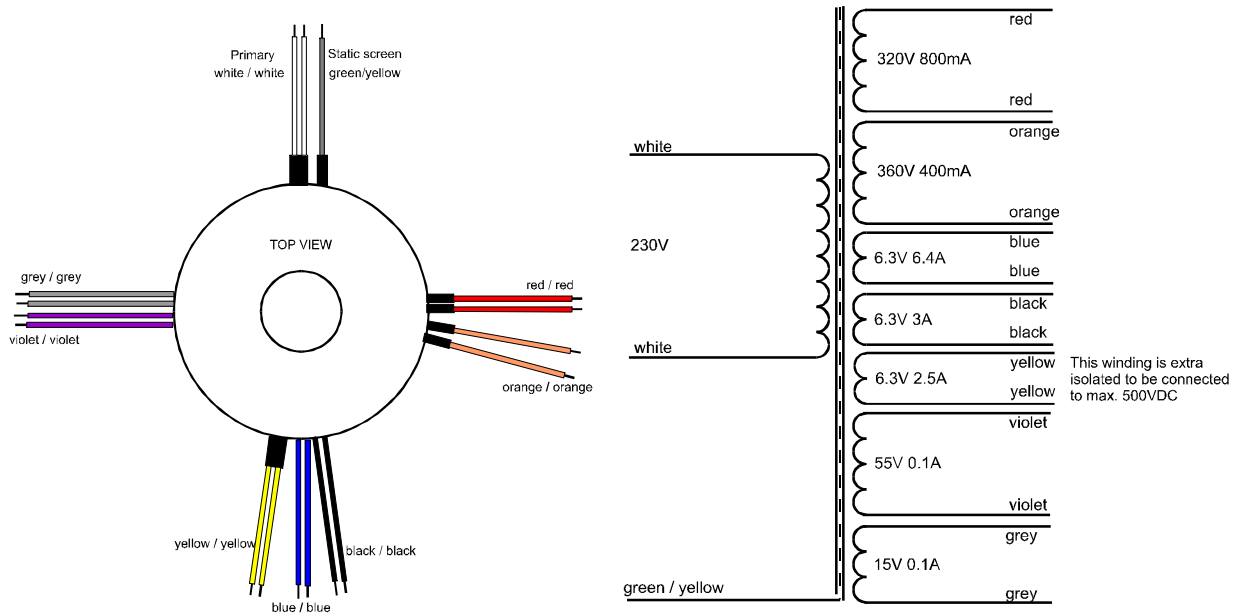

DIMENSIONS	
Outer diameter	approx. 162 mm
Inner diameter	approx. 41 mm
Height excl. mounting materials	approx. 60 mm
Weight	approx. 6kg
Lead type	all leads solid
Lead length	approx. 200mm