

®



AMPLIFIER MODULES
VERSTERKER MODULEN
TOROIDAL TRANSFORMERS
RINGKERN TRANSFORMATOREN

Amplimo BV
Industrieweg 14
NL-7161 BX NEEDE
The Netherlands

Phone +31 545 283456
Fax +31 545 283457
Internet www.amplimo.nl
email info@amplimo.nl


Postbus 27
NL-7160 AA NEEDE
The Netherlands

Girorekening 38.12.499
Rabobank rekening 31.33.11.250
IBAN NL36RABO0313311250
Handelsregister Enschede 06087186
VAT nr. NL8071.67915B01

AMPLIMO

Toroidal power-transformer type XN997S for valve amplifiers

CONNECTIONS				
Primary	230V 50/60Hz	white - white		1
static tapescreen between primary and secondary windings: green / yellow striped				2
Secondaries	330V . 0 . 330V 0.4A	red - black - red		3
	370V . 0 . 370V 0.2A	orange - grey - orange		4
	• 6.3V 6.4A	blue - blue		5
	• 6.3V 2.5A	yellow - yellow		6
	• 6.3V 3A	brown - brown		11
	• 5V 4A	green - green		7
	• 5V 2A	pink - pink		8
	55V 0.1A	violet - violet		9
	15V 0.1A	grey - grey		10
	Regulation approx. 4%			
• These windings are extra isolated to be connected to max. 500VDC				
Manufactured according EN60742.				
Special low noise design.				

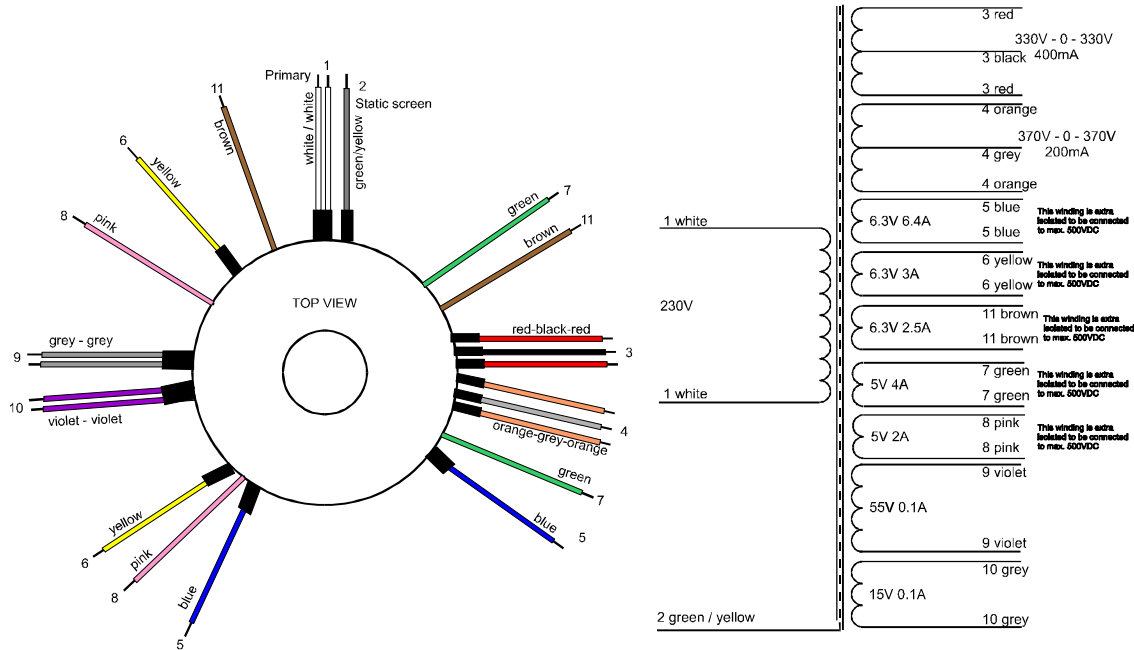

DIMENSIONS	
Outer diameter	approx. 190 mm
Inner diameter	approx. 55 mm
Height excl. mounting materials	approx. 67 mm
Weight	approx. 7.2kg
Lead type	all leads solid
Lead length	approx. 200mm