

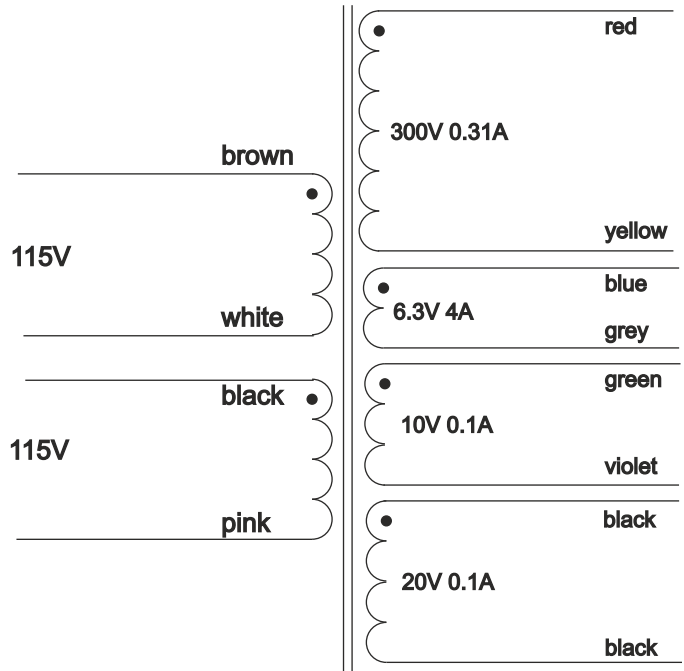


Toroidal transformer type XA261

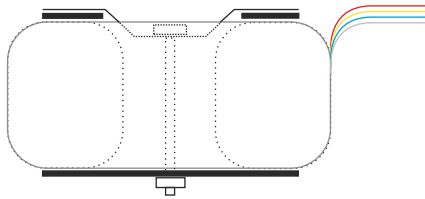

primaries in parallel
for 115V operation

primaries in series
for 230V operation

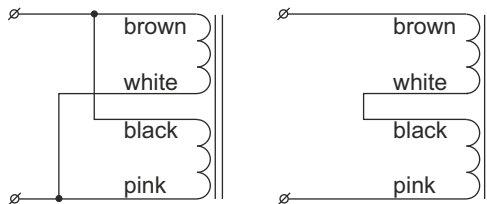

Diameter 98mm
Height 48mm
Weight 1.4kg

Height and weight are measured without mounting materials
All leads are approx. 200mm long

Supplied mounting materials:

- 1 metal washer Ø7cm
- 2 neoprene washers Ø7cm
- 1 bolt M5x55 with nut


manufactured and tested according to EN61558.

Time lag fuses to be used.

Primary:


- For 115V mains : 1.2A 5x20mm IEC127 high I²t-value
- For 230V mains: 0.63A 5x20mm IEC127 high I²t-value.

Secondary: additional protection is required for each secondary winding

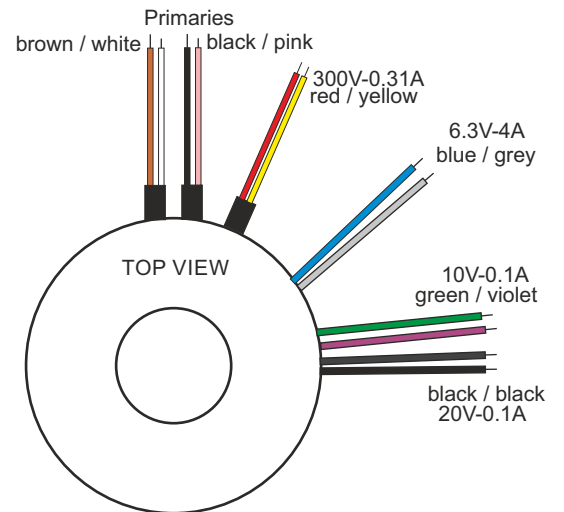

Type number	primary	secondaries	
		voltage	current
XA261	2x 115V	300V	310mA
		6.3V	4A
		10V	100mA
		20V	100mA

All voltages are under full ohmic load.
Regulation : 8%



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB
June 2004

© Copyright Amplimo BV

XA261

toroidal power transformer
for valve-amplifiers