

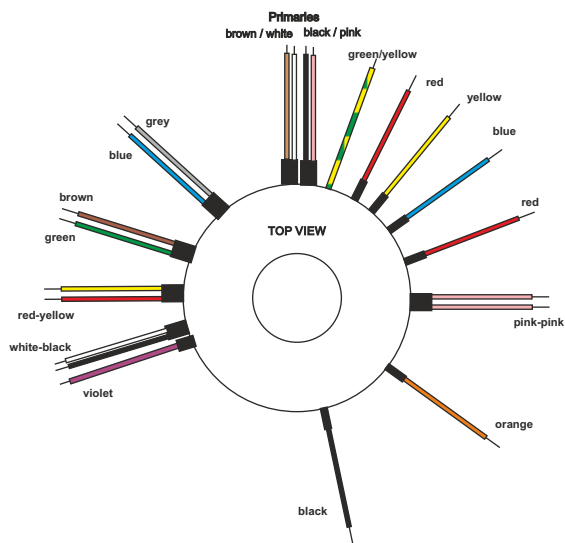




Toroidal transformer type XN1677S

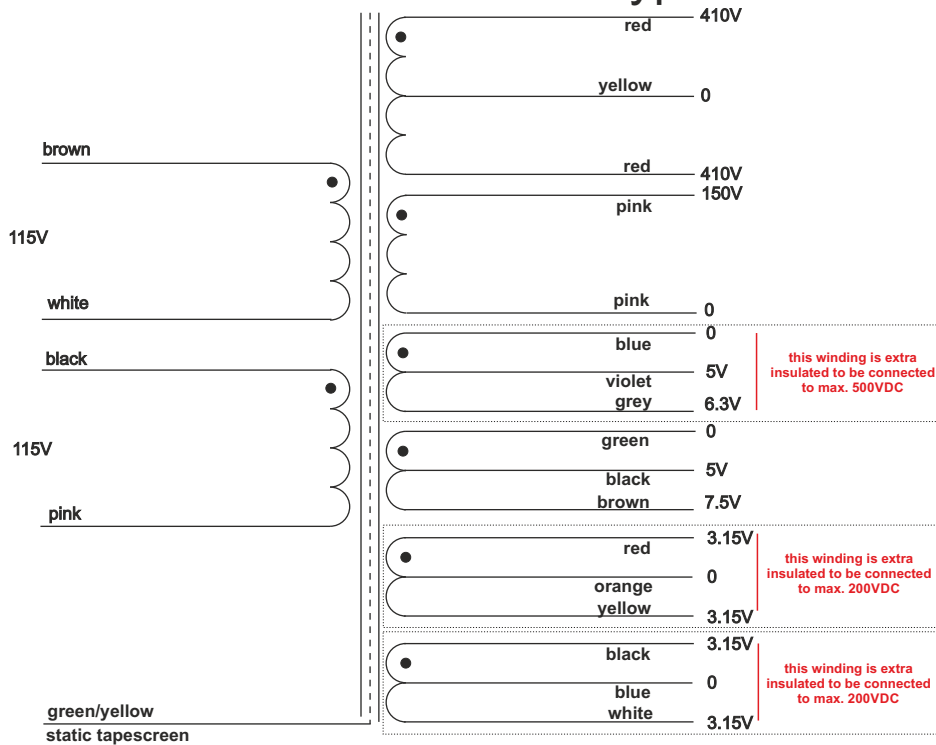

primaries in parallel for 115V operation



primaries in series for 230V operation



Diameter 137mm
 Height 64mm
 Weight 3.5kg
 Height and weight are measured without mounting materials
 All leads are approx. 200mm long

Supplied mounting materials:
 1 metal washer Ø9cm
 2 neoprene washers Ø9cm
 1 bolt M5x70 with nut

Build and tested according to EN61558

XN1677
 primary 115V brown - white
 115V black - pink
 Static tapescreen green/yellow
410V-0-410V @ 150mA
 red-yellow-red
0 - 150V @ 100mA
 pink - pink
0 - 5V - 6.3V @ 7A
 blue - violet - grey
0 - 5V - 7.5V @ 3A
 green - black - brown
3.15V - 0 - 3.15V @ 2A
 red - orange - yellow
3.15V - 0 - 3.15V @ 2A
 black - blue - white

Special low noise design !
 Magnetic shielding
 All voltages are under full ohmic load.
 Regulation : approx 8 %



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 27
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 283456
 Fax+31 (0)545 283457

info@amplimo.nl
<http://www.amplimo.nl>

| | |
|----|----------------------|
| HB | Nov 2016 |
| | |
| | |
| | |
| © | Copyright Amplimo BV |

XN1677S

toroidal power transformer
 for valve-amplifiers