

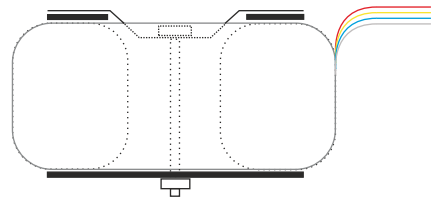




# Toroidal transformer type XN1887

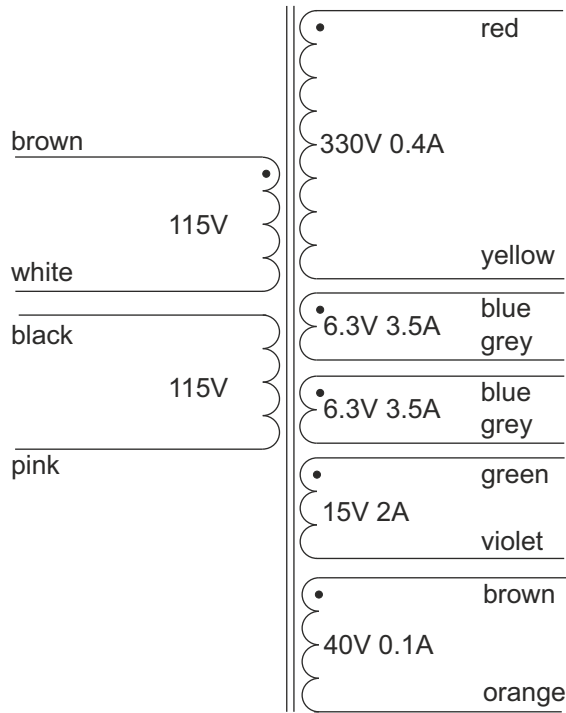

primaries in parallel for 115V operation



primaries in series for 230V operation

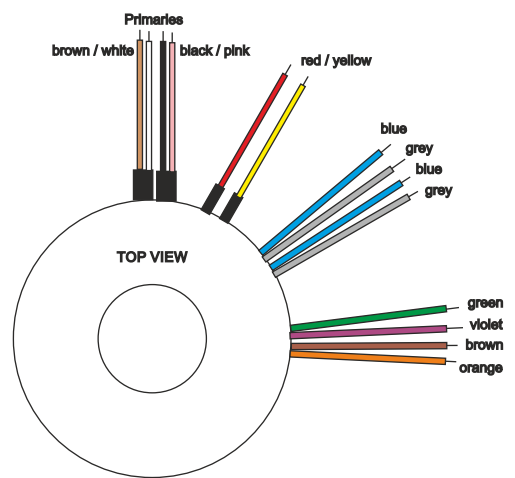

Diameter 112mm  
 Height 54mm  
 Weight 2.3kg

Height and weight are measured without mounting materials  
 All leads are approx. 200mm long.  
 Leads „primaries“ and „HV-winding“ are flexible. The rest of the leads are solid.

Supplied mounting materials:  
 1 metal washer Ø9cm  
 2 neoprene washers Ø9cm  
 1 bolt M5x60 with nut

Built and tested according to EN61558. With CE marking.

Time lag fuses to be used.

Primary:

For 115V mains: 2A 5x20mm IEC127 high I<sup>2</sup>t-value in series  
 For 230V mains: 1A 5x20mm IEC127 high I<sup>2</sup>t-value.

additional protection for secondaries required.

Type number	primary	secondaries voltage	current
XN1887	2x 115V	330V	400mA
		6.3V	3.5A
		6.3V	3.5A
		40V	0.1A

All voltages are under full ohmic load.  
 Regulation : approx. 8.5%



Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 283456  
 Fax+31 (0)545 283457

info@amplimo.nl  
<http://www.amplimo.nl>

HB

Nov 2016

**XN1887**

toroidal power transformer  
 for valve-amplifiers

© Copyright Amplimo BV