




Toroidal transformer type 6N410

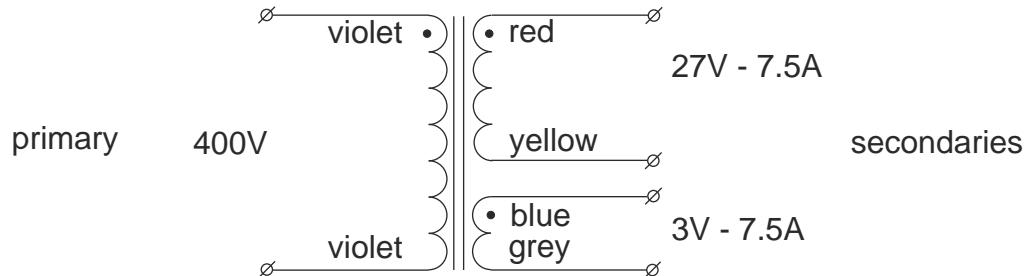

serial operation to increase the secondary voltage

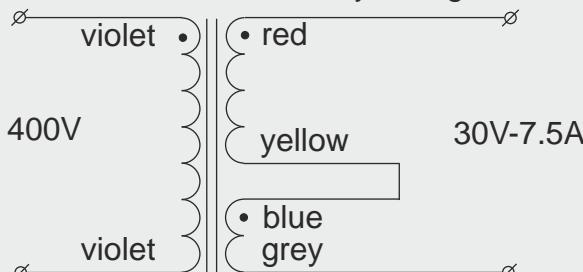

parallel operation to double the secondary current


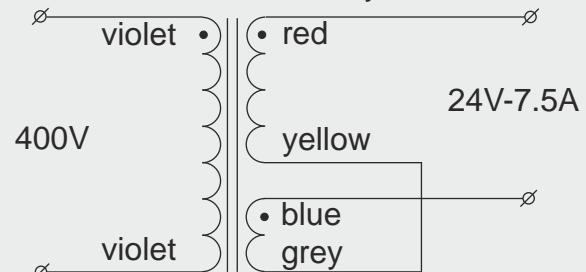


Power rating 225VA
Primary voltage 400VAC - 50/60Hz
Secondary voltages 27V + 3V - 7.5A
Regulation 7%

Diameter 112mm
Height 51mm
Weight 2.3kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø90mm
2 neoprene washers Ø90mm
1 bolt M5x70mm with nut

Wound and tested according to EN61558.

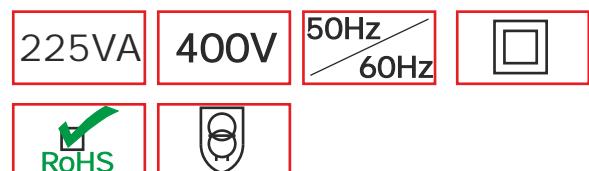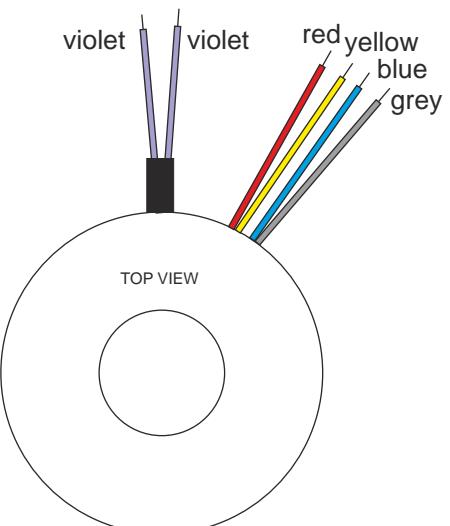

Industrieweg 14
NL-7161 BX NEEDE
The Netherlands
P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel. +31 (0)545 28 3456
Fax +31 (0)545 28 3457
info@amplimo.nl
<http://www.amplimo.nl>

HB

Aug 2012

6N410

400V toroidal transformer
225VA