






Toroidal transformer type 9N345

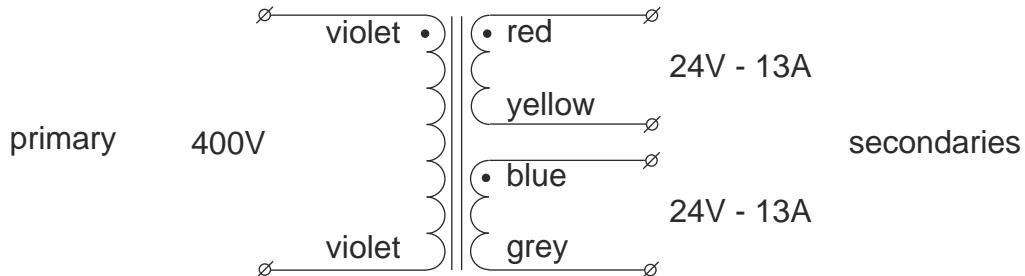

serial operation to double the secondary voltage

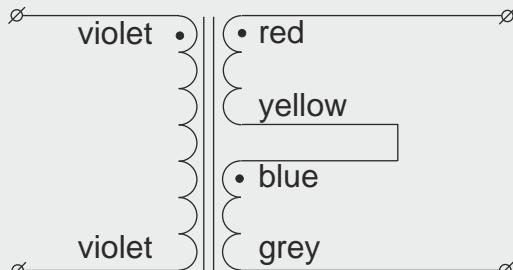

parallel operation to double the secondary current

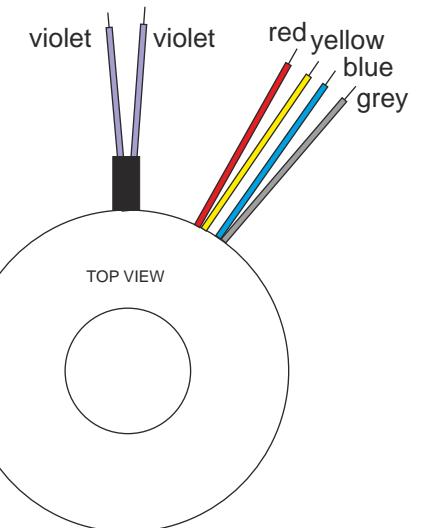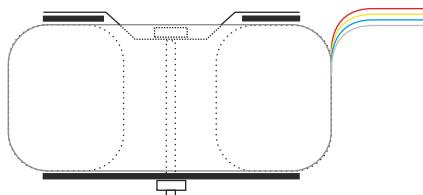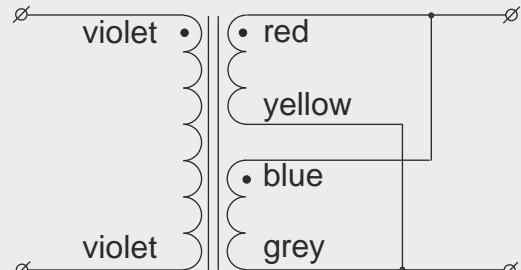


Power rating 625VA
Primary voltage 400VAC - 50/60Hz
Secondary voltages 2x 24V - 13A
Regulation 4%

Diameter 135mm
Height 72mm
Weight 5.0kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø110mm
2 neoprene washers Ø110mm
1 bolt M8x90mm with nut

Wound and tested according to EN61558. With CE and UL/CSA approvals. UL filenumber E320377.

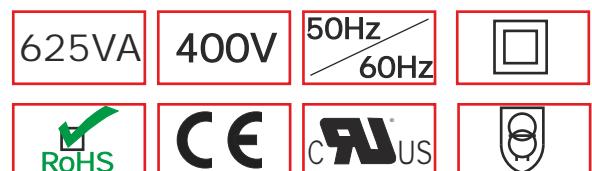

Industrieweg 14
NL-7161 BX NEEDE
The Netherlands
P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457
info@amplimo.nl
<http://www.amplimo.nl>

HB

Aug 2012

9N345

© Copyright Amplimo BV

400V toroidal transformer
625VA