
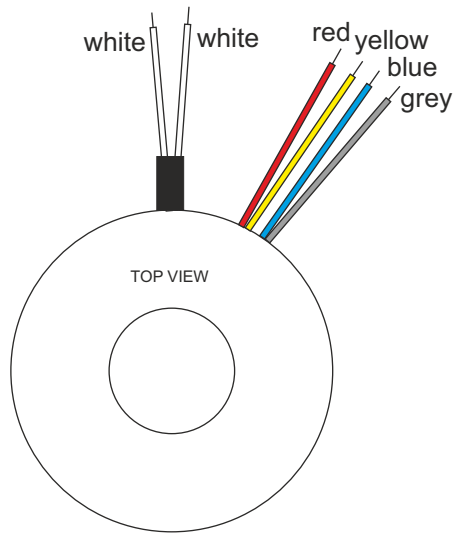
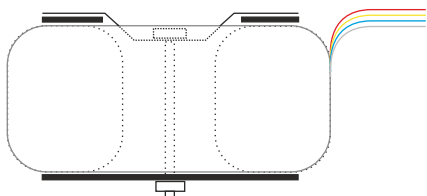
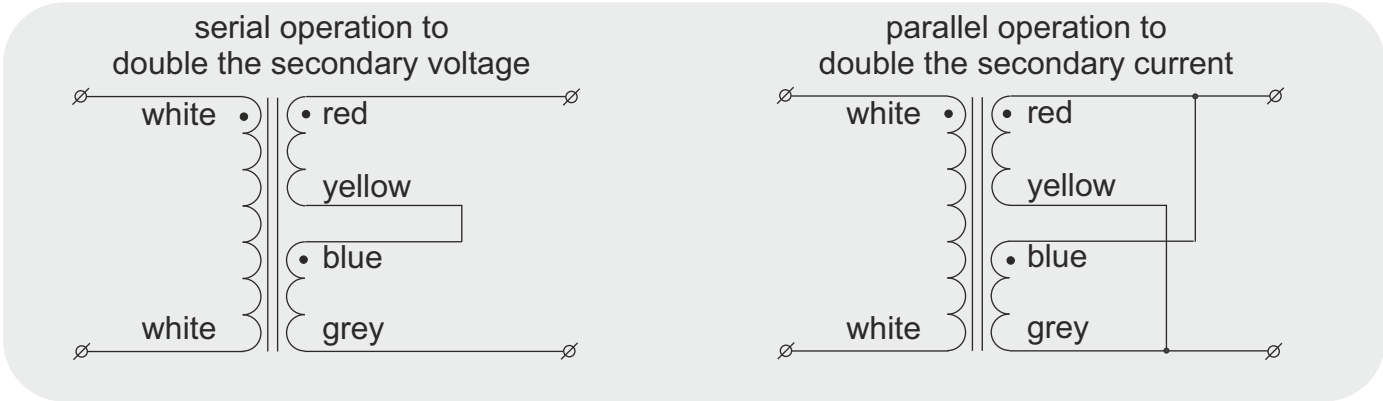


### Toroidal transformer type 78057

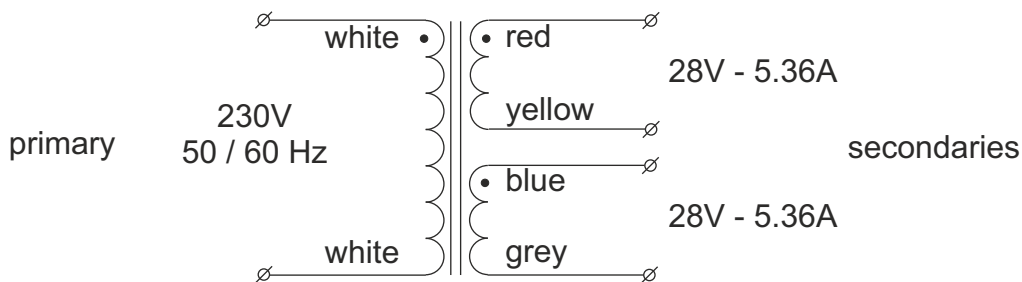


**Power rating** 300VA  
**Primary voltage** 230VAC - 50/60Hz  
**Secondary voltages** 2x 28V - 5.36A  
**Regulation** 5%  
**Diameter** 121mm  
**Height** 56mm  
**Weight** 2.9kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

**Supplied mounting materials:**  
 1 metal washer Ø90mm  
 2 neoprene washers Ø90mm  
 1 bolt M5x70mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01  
 UL/CSA approvals, UL filenumber E320377.  
 CE, RoHS-compliant

Time lag fuses to be used.  
 Primary: 1.6A, 5x20mm, IEC127, high I<sup>2</sup>t value  
 Secondary: none

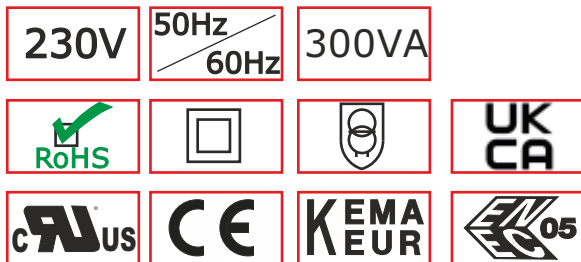

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Dec 2011	<b>78057</b>  <b>toroidal transformer</b> <b>300VA</b>
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456	HB	Mar 2023	
	info@amplimo.nl https://www.amplimo.nl	©	Copyright Amplimo BV	