

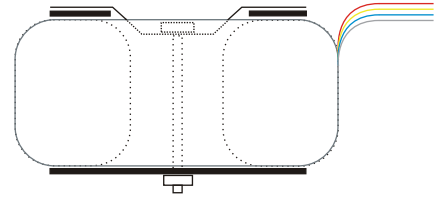




# Toroidal transformer type 3N604

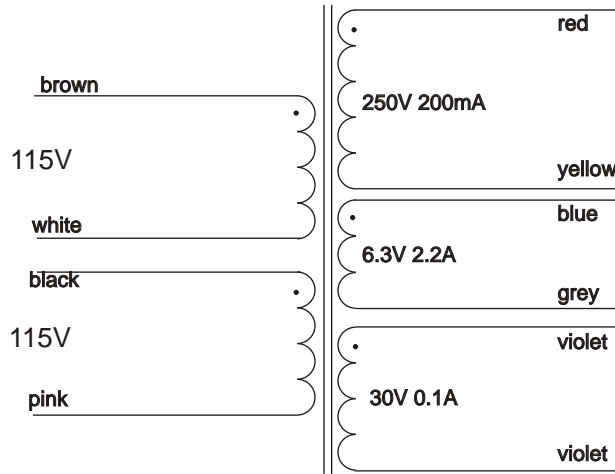

primaries in parallel for 115V operation



primaries in series for 230V operation

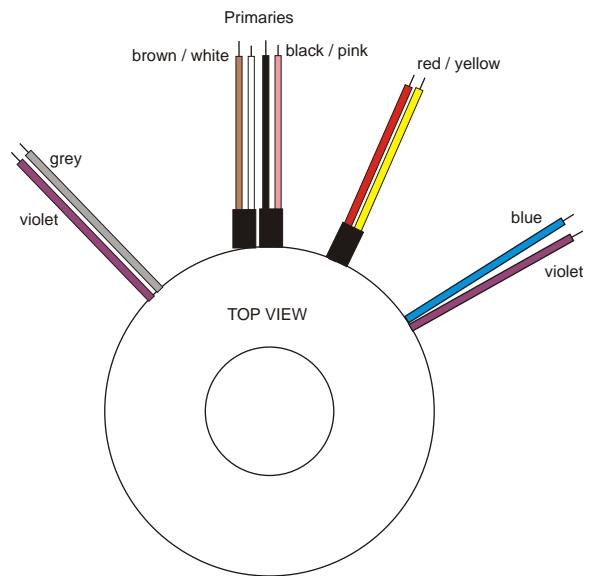

Diameter 95 mm  
 Height 36mm  
 Weight 0.95kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx.200mm long

Supplied mounting materials:  
 1 metal washer Ø7cm  
 2 neoprene washers Ø7cm  
 1 bolt M5x50 with nut


With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
 Primary:  
 For 115V mains : 0.8A 5x20mm IEC127 high I<sup>2</sup>t-value.  
 For 230V mains: 0.4A 5x20mm IEC127 high I<sup>2</sup>t-value.

Secondary: additional protection required for each secondary

Type number	primary	secondaries	
		voltage	current
3N604	2x 115V	250V	200mA
		6.3V	2.2A
		30V	0.1A

All voltages are under full ohmic load.  
Regulation : 10%

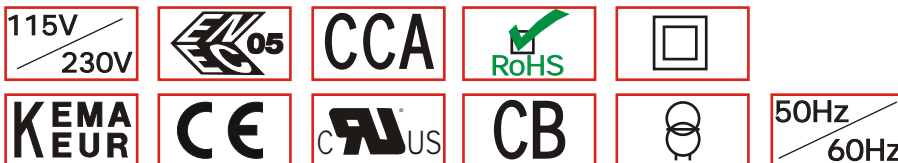

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	April 2010	<h1>3N604</h1>
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457			
	info@amplimo.nl http://www.amplimo.nl	©	Copyright Amplimo BV	