

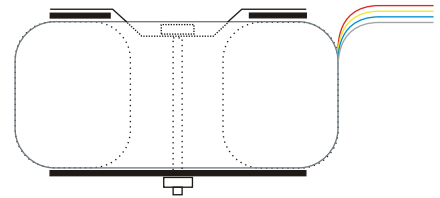




Toroidal transformer type 5N1609

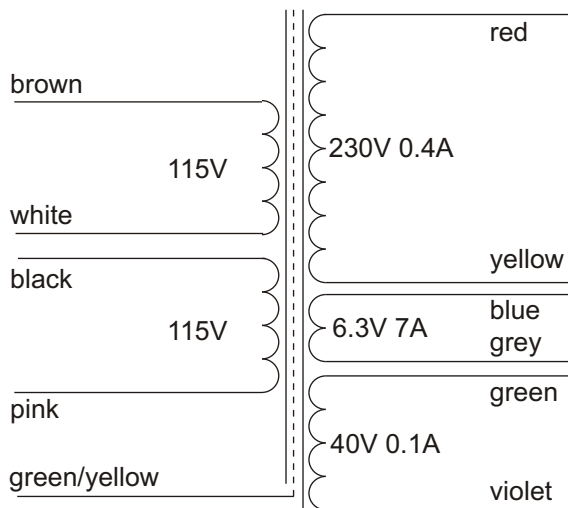

primaries in parallel
for 115V operation



primaries in series
for 230V operation

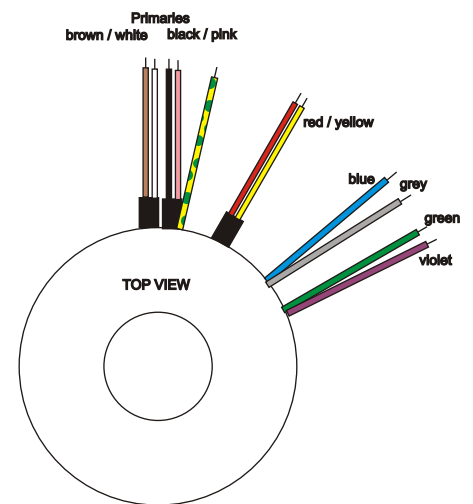

Diameter 112mm
Height 46mm
Weight 2kg
Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:
1 metal washer Ø9cm
2 neoprene washers Ø9cm
1 bolt M5x50 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
Primary:
For 115V mains : 1.6A 5x20mm IEC127 high I²t-value
For 230V mains: 0.8A 5x20mm IEC127 high I²t-value.

Secondary: (230V-400mA)0,4A, (6.3V-7A)none, (40V-100mA)0,16A

| Type number | primary | secondaries | |
|--|---------|-------------|---------|
| | | voltage | current |
| 5N1609 | 2x 115V | 230V | 400mA |
| | | 6.3V | 7A |
| | | 40V | 0.1A |
| All voltages are under full ohmic load. Regulation : 7% | | | |



Industrieweg 14
7161BX NEEDE
The Netherlands

P O - B o x 27
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457
info@amplimo.nl
http://www.amplimo.nl

HB

June 2007

5N1609

toroidal power transformer
for valve-amplifiers

© Copyright Amplimo BV