

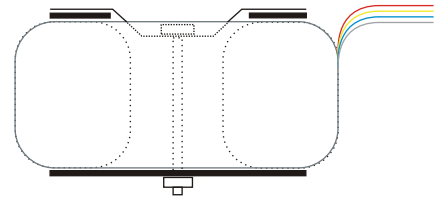




Toroidal transformer type 6N606

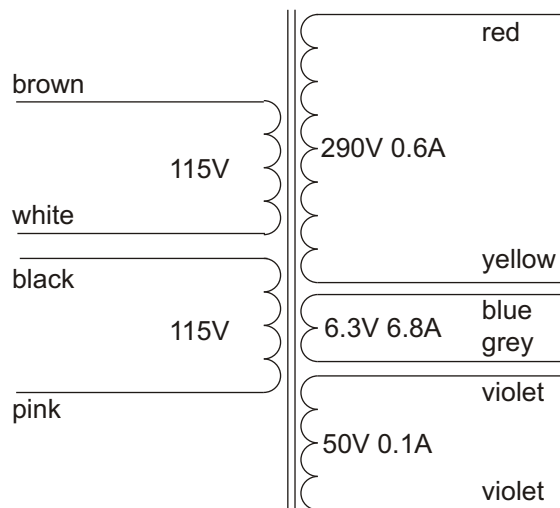

primaries in parallel
for 115V operation



primaries in series
for 230V operation

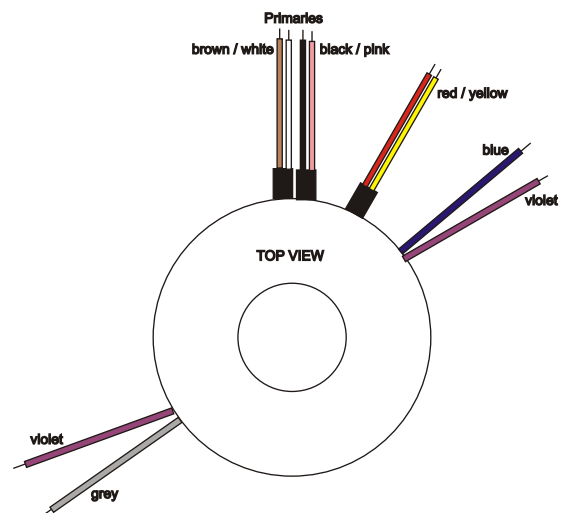

Diameter 112mm
Height 49mm
Weight 2.3kg
Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:
1 metal washer Ø9cm
2 neoprene washers Ø9cm
1 bolt M5x60 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.


Time lag fuses to be used.
Primary:
For 115V mains : 2A 5x20mm IEC127 high I²t-value in series
with 2 NTC-resistors type NTC2.5
For 230V mains: 1A 5x20mm IEC127 high I²t-value.

Secondary: (290V-600mA)0,63A, (6.3V-6.8A)none, (50V-100mA)0,16A

Type number	primary	secondaries	
		voltage	current
6N606	2x 115V	290V	600mA
		6.3V	6.8A
		50V	0.1A
All voltages are under full ohmic load. Regulation : 7%			

Amendments:

october 2003: NGV-winding increased to 50V (was 40V)

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	October 2003	6N606
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457			toroidal power transformer for valve-amplifiers
info@amplimo.nl http://www.amplimo.nl	© Copyright Amplimo BV			