




Toroidal power-transformer type 7N994S for valve amplifiers

CONNECTIONS			
Primary	230V 50/60Hz	white - white	
static tapescreen between primary and secondary windings		green / yellow striped	
Secondaries	320V 0.4A	red - red	
	360V 0.2A	orange - orange	
	• 6.3V 5A	blue - blue	
	• 6.3V 2.5A	yellow - yellow	
	55V 0.1A	violet - violet	
	15V 0.1A	grey - grey	
Regulation	approx. 5%		
Total power rating	255 VA		
These windings are extra isolated to be connected to max 500VDC			
With KEMA KEUR, ENEC,CE and UL/CSA approvals.			
Special low noise design.			

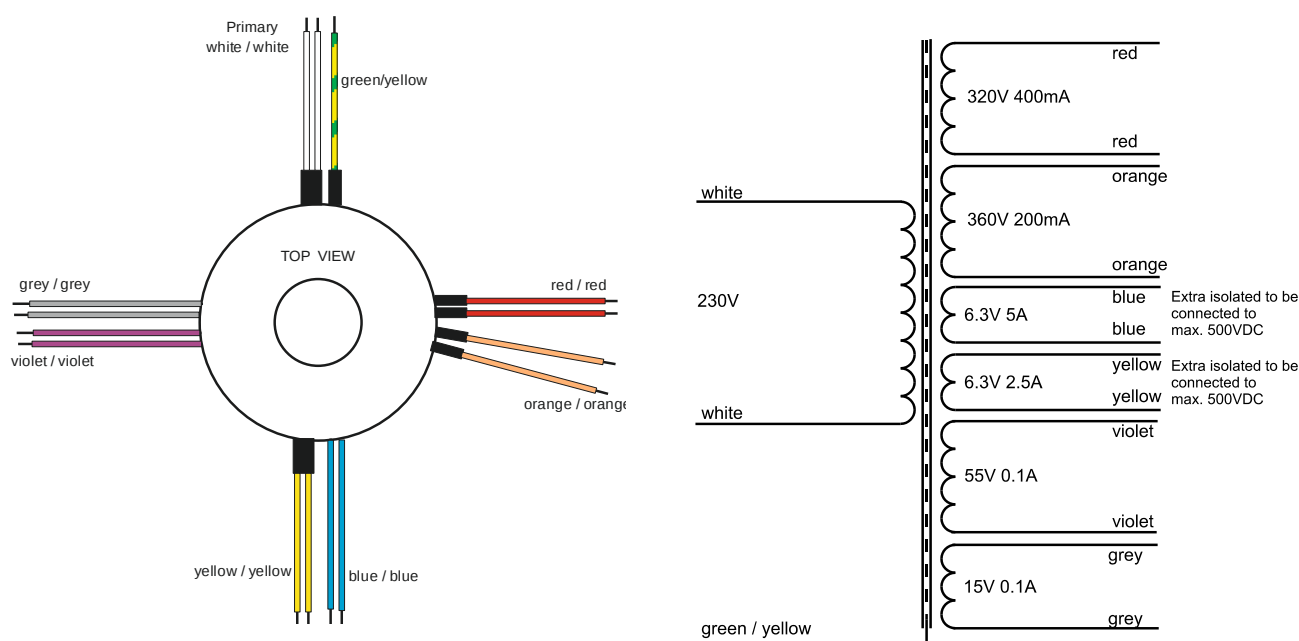

DIMENSIONS		
Outer diameter	approx.	123 mm
Inner diameter	approx.	34 mm
Height excl. mounting materials	approx.	60 mm
Weight	approx.	2.9kg
Lead type	all leads solid	
Lead length	approx.	200mm