






Toroidal transformer type 8N1610

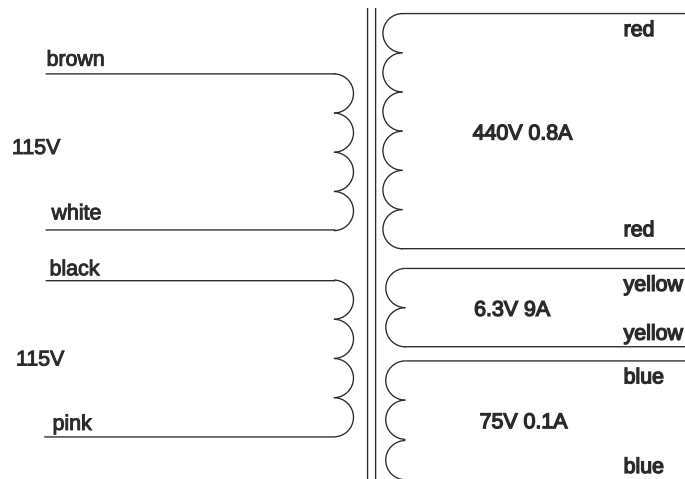

primaries in parallel
for 115V operation



primaries in series
for 230V operation

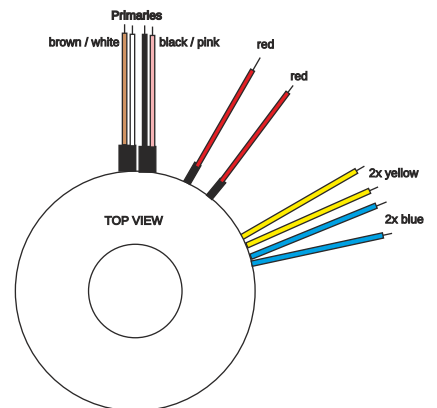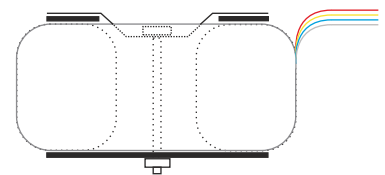

Diameter 136mm
Height 63mm
Weight 4.2kg
Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:

- 1 metal washer Ø11cm
- 2 neoprene washers Ø11cm
- 1 bolt M8x70 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 2027348.03, UL filenumber E320377.

Time lag fuses to be used.

115V primary: 5A 5x20mm IEC127 I²t min.30 in series with 2 NTC-resistors type NTC2.5

230V primary: 2.5A 5x20mm IEC127 I²t min. 18 in series with 2 NTC-resistors type NTC5

Secondary: (440V-800mA)800mA, (6.3V-9A)none, (75V-100mA)0,16A

Type number	primary	secondaries	
		voltage	current
8N1610	2x 115V	440V	800mA
		6.3V	9A
		75V	0.1A
All voltages are under full ohmic load.			
Regulation : 4.5%			



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
<http://www.amplimo.nl>

HB

March 2013

8N1610

toroidal power transformer
for valve-amplifiers

© Copyright Amplimo BV