


AMPLIMO Toroidal Output Transformer type 08SE5K0H



ALL UNUSED WIRES, NEED TO BE INSULATED WITH HEATSHRINK !

primary impedance	5000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	35.2 (4Ω) - 24.9 (8Ω)
UL-tap	40%
nominal power	8W
nominal primary DC current	60mA
-3dB frequency bandwidth (1mW)	20Hz - 80kHz
power bandwidth (-3dB) starting at	21Hz
primary inductance	25H
primary leakage ind.	14mH
primary capacitance	469pF
primary DC-resistance	87Ω
secondary DC-resistance	0.22Ω(4Ω), 1.5Ω(8Ω)
dimensions od x height	106mm x 55mm
mounting	M8x20 center bolt
weight	1.3kg
Leadlength	200mm

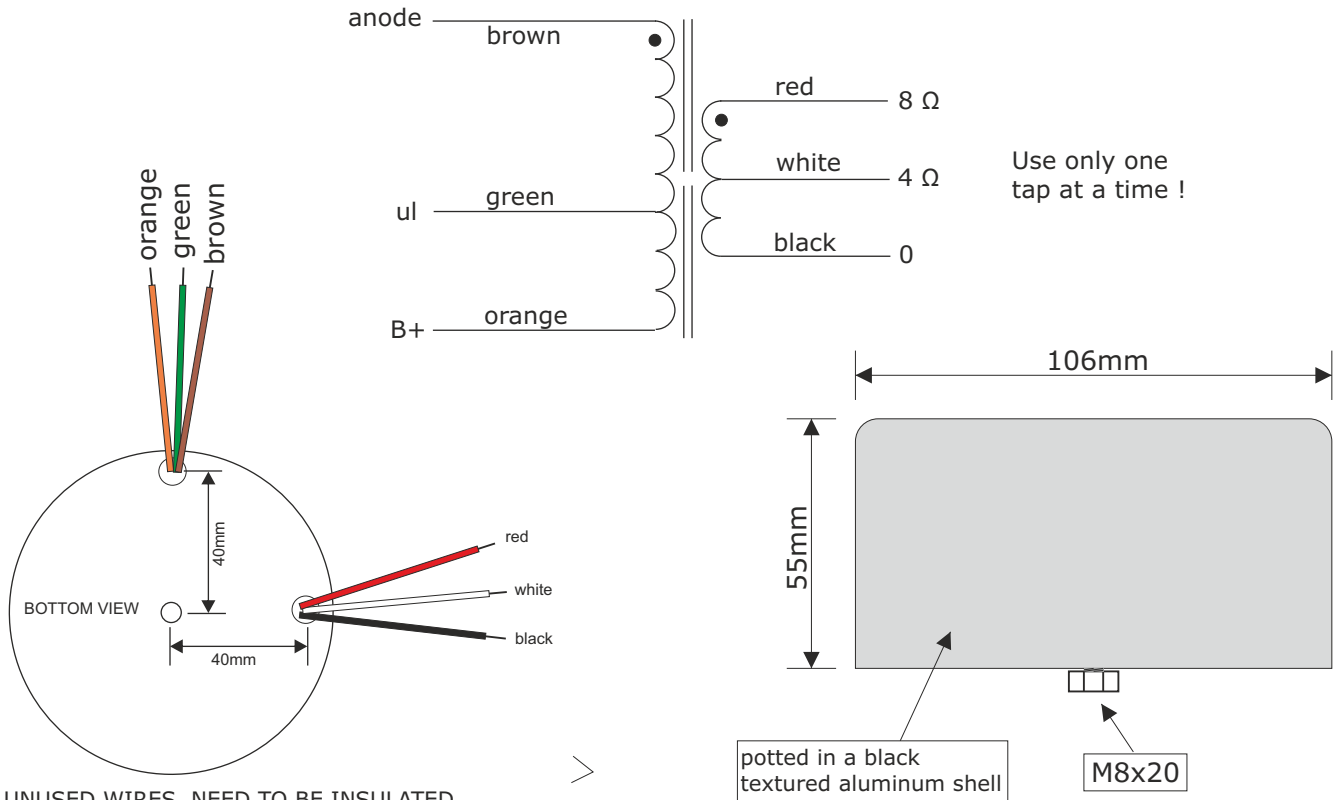

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB


Sept 2021

08SE5K0H

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

08SE5K0H

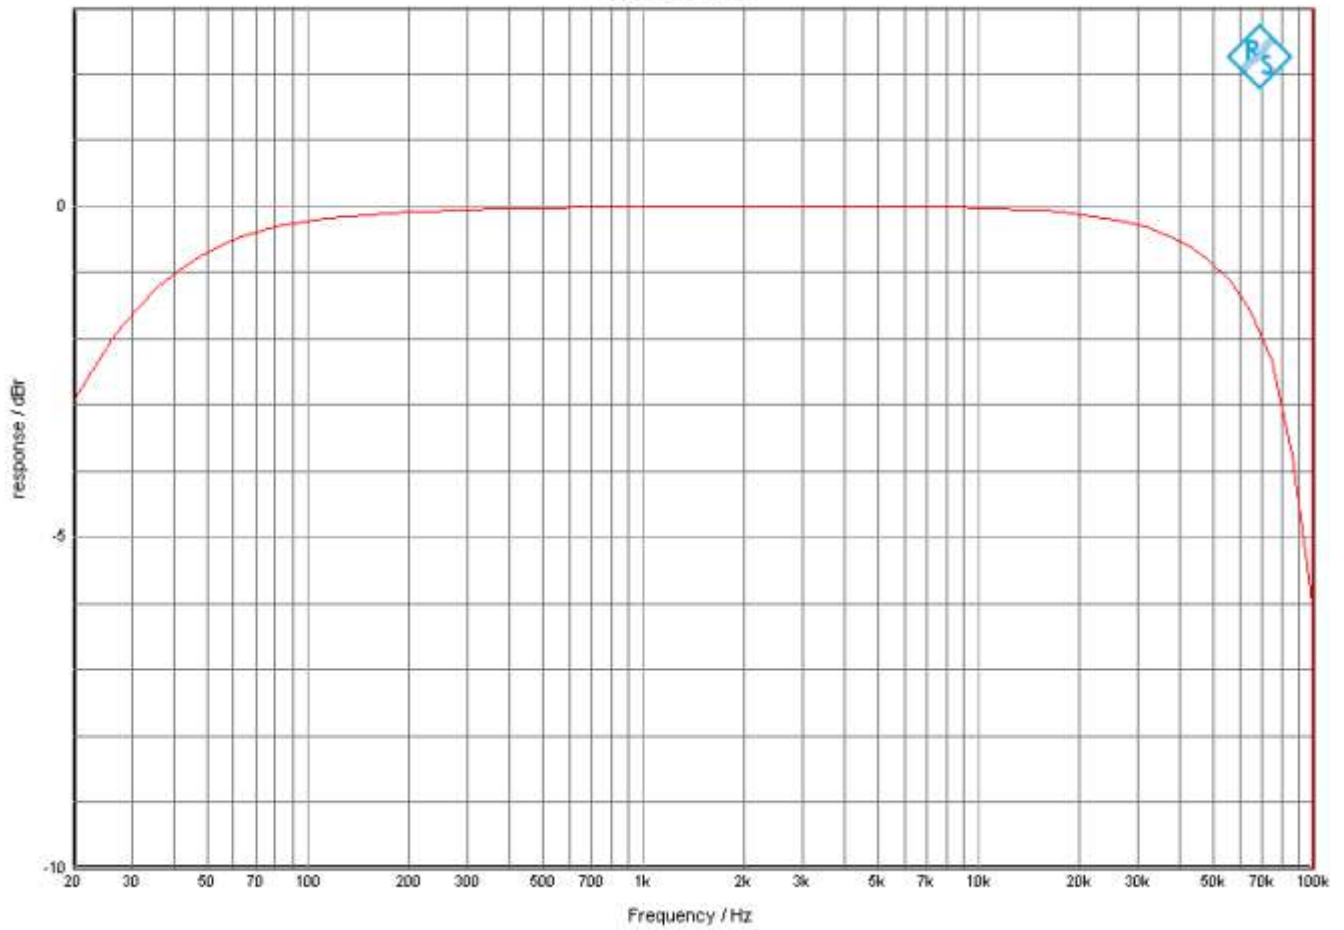

08SE5K0H

