


# AMPLIMO Toroidal Output Transformer type **100PP2K5H**

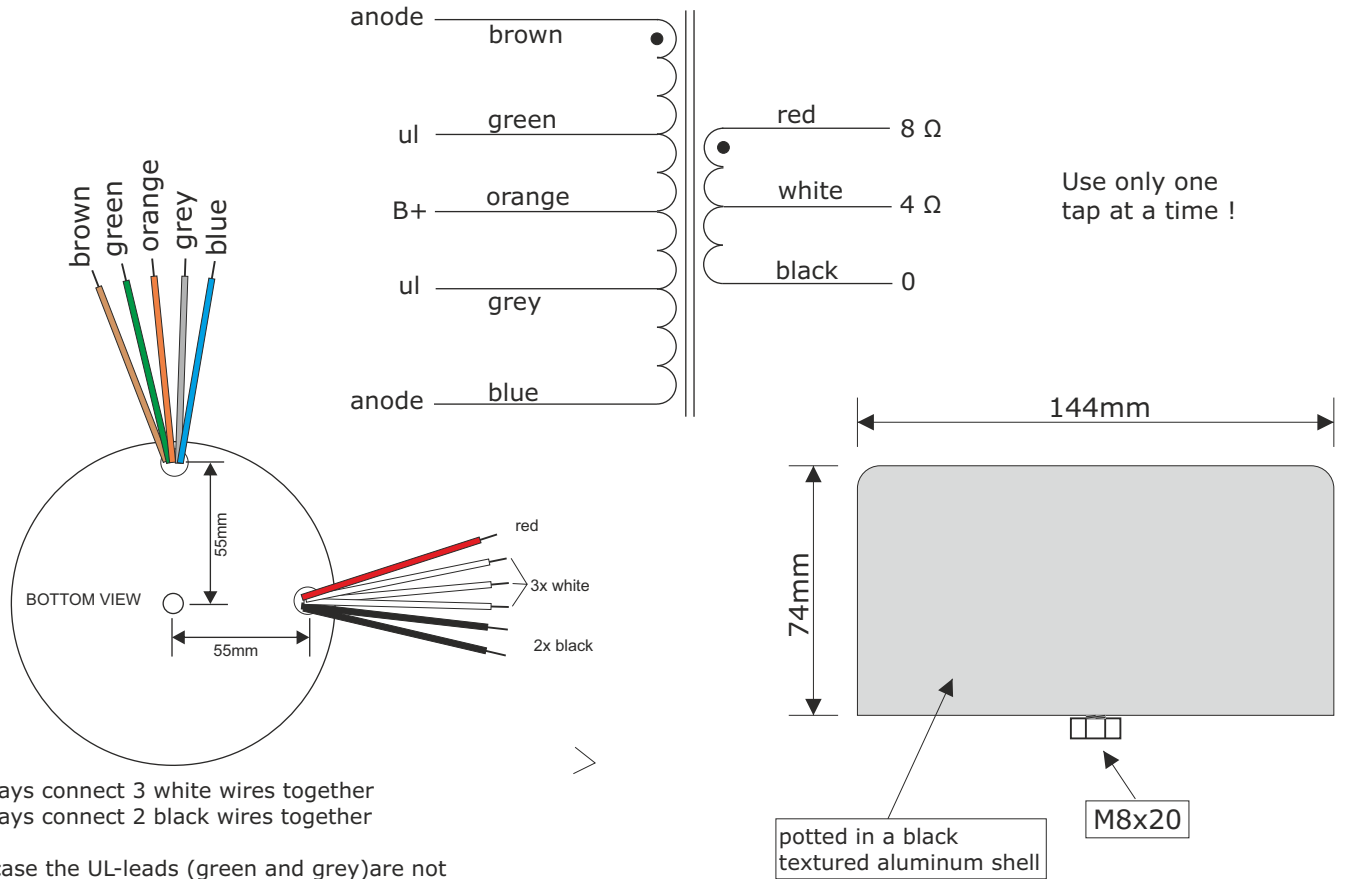

Always connect 3 white wires together  
Always connect 2 black wires together

In case the UL-leads (green and grey) are not used, insulate them carefully with heatshrink !

primary impedance	2500 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	25 (4Ω) - 17.7 (8Ω)
UL-tap	35%
nominal power	100W
-3dB frequency bandwidth	5Hz - 125kHz
power bandwidth (-3dB) starting at	30Hz
primary inductance	813H
primary leakage ind.	2.7mH
primary capacitance	670pF
primary DC-resistance	65Ω
secondary DC-resistance	0.12Ω(4Ω) 0.18(8Ω)
dimensions od x height	144mm x 74mm
mounting	M8x20 center bolt
weight	3.8kg
Leadlength	200mm



Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands

P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457

info@amplimo.nl  
http://www.amplimo.nl

HB


Sept 2021

# 100PP2K5H

Wide bandwidth high-end toroidal output transformer

© Copyright Amplimo BV

100PP2K5H

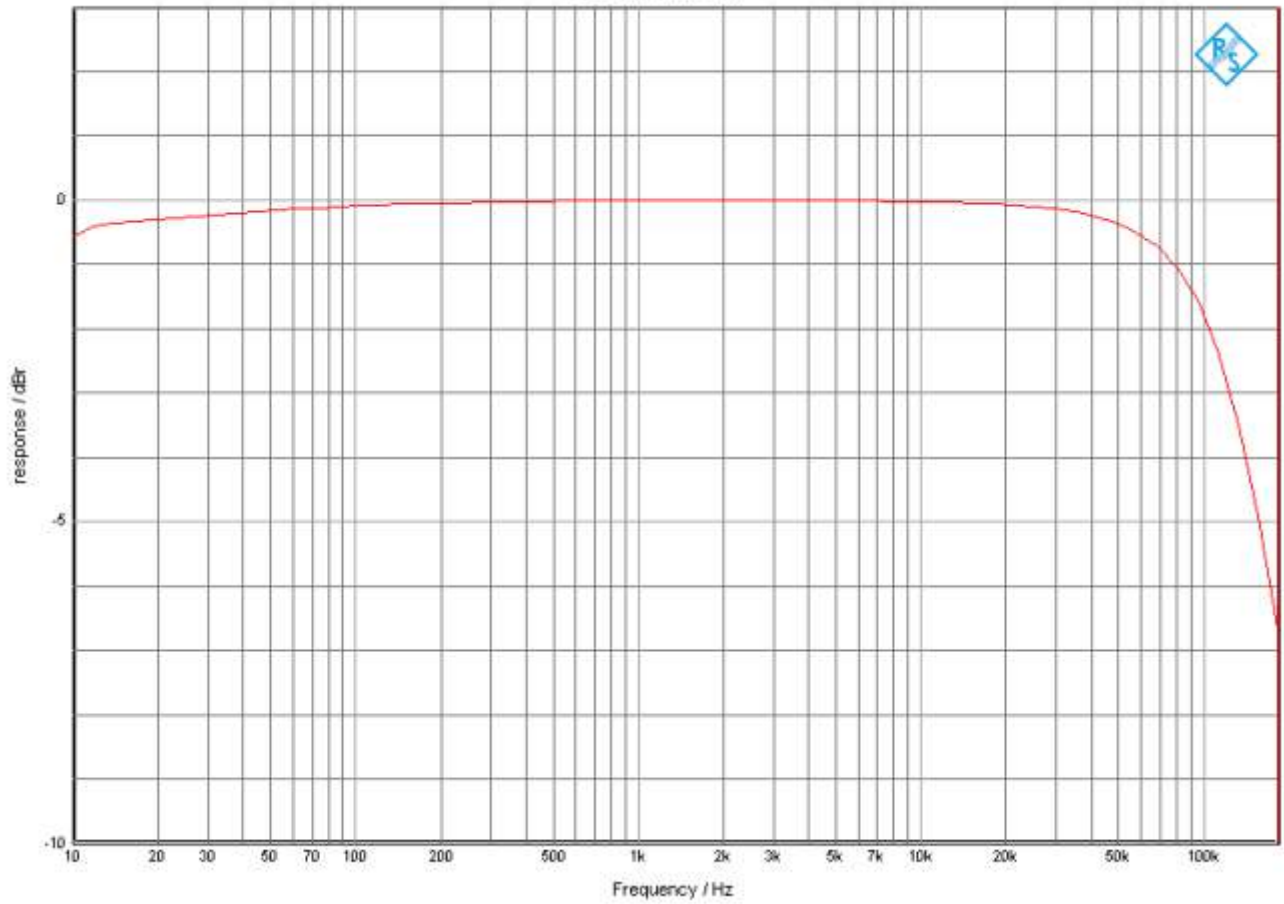

100PP2K5H

