


AMPLIMO Toroidal Output Transformer type 10PP9K0S



primary impedance	9000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	47.3(4Ω) - 33.9 (8Ω)
UL-tap	35%
nominal power	10W
-3dB frequency bandwidth	4Hz - 80kHz
power bandwidth (-3dB) starting at	35Hz
primary inductance	750H
primary leakage ind.	52mH
primary capacitance	335pF
primary DC-resistance	113Ω
secondary DC-resistance	130mΩ(4Ω) 280mΩ(8Ω)
dimensions od x height	83mm x 37mm
mounting	toroidal clamp & washers
weight	575kg

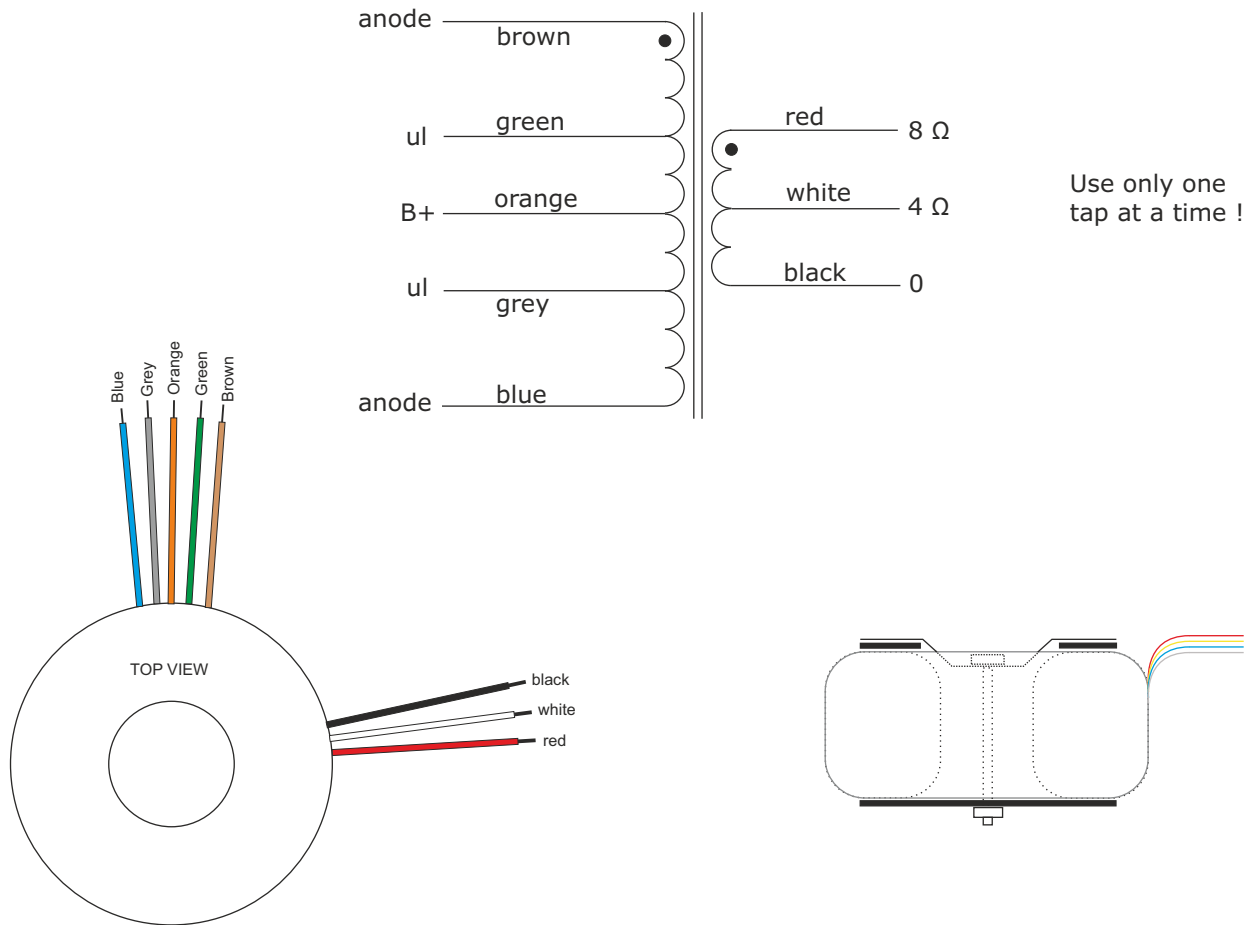

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

May 2020

10PP9K0S

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

