


AMPLIMO Toroidal Output Transformer type 20PP8K0H



primary impedance	8000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	45 (4Ω) - 32 (8Ω)
UL-tap	35%
nominal power	20W
-3dB frequency bandwidth	5Hz - 80 kHz
power bandwidth (-3dB) starting at	19Hz
primary inductance	1500H
primary leakage ind.	14mH
primary capacitance	480pF
primary DC-resistance	113Ω
secondary DC-resistance	160mΩ(4Ω) 280mΩ(8Ω)
dimensions od x height	106mm x 55mm
mounting	M8x20 center bolt
weight	2.6kg
Leadlength	200mm

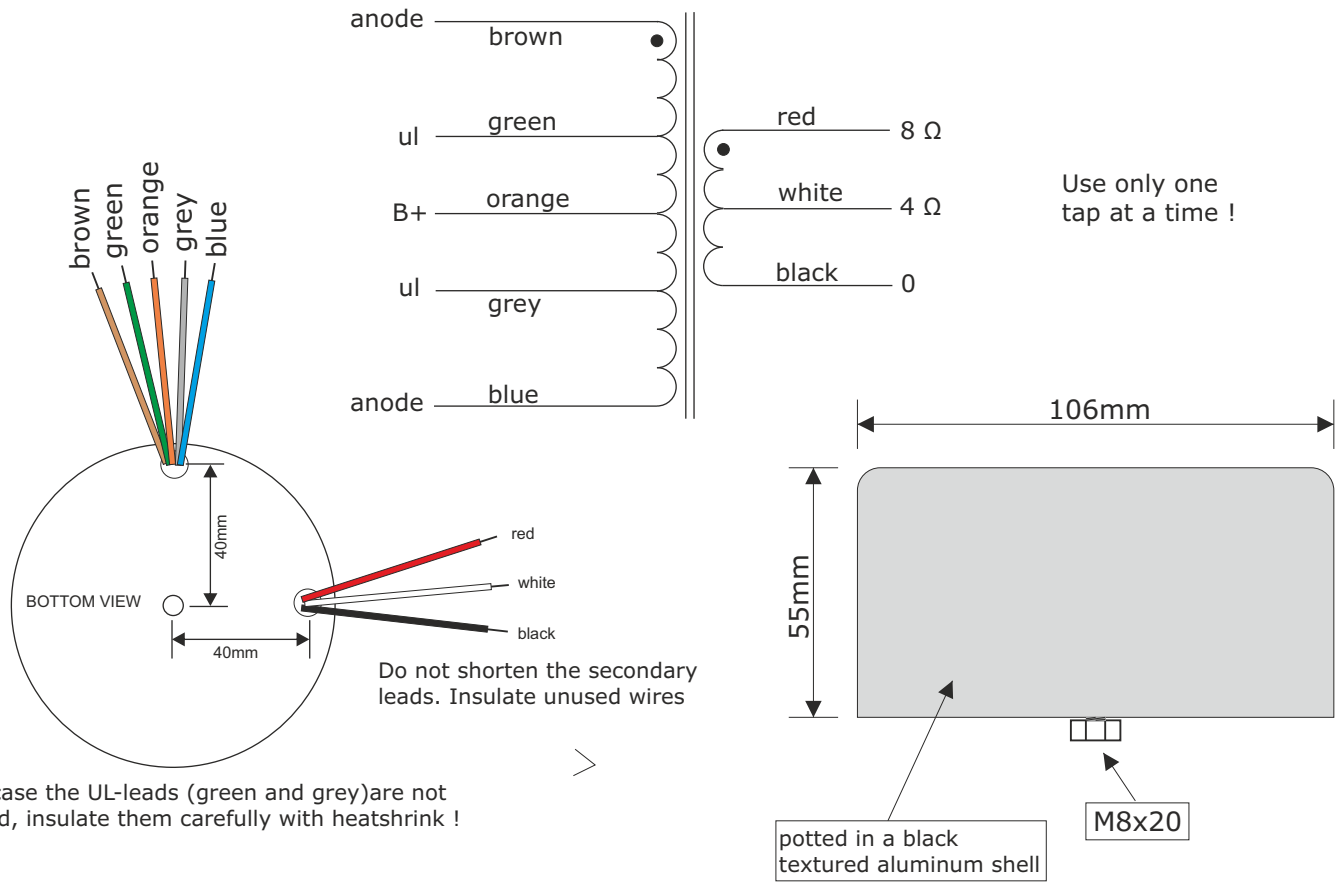

Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands
 P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 283456
 Fax+31 (0)545 283457
 info@amplimo.nl
 http://www.amplimo.nl

HB
 Sept 2020
 © Copyright Amplimo BV

20PP8K0H

Wide bandwidth toroidal tube output transformer

