


AMPLIMO Toroidal Output Transformer type 20PP8K0S



primary impedance	8000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	44.8 (4Ω) - 31.5 (8Ω)
UL-tap	35%
nominal power	20W
-3dB frequency bandwidth (1mW)	7Hz - 80kHz
power bandwidth (-3dB) starting at	35Hz
primary inductance	1220H
primary leakage ind.	18mH
primary capacitance	390pF
primary DC-resistance	152Ω
secondary DC-resistance	145mΩ(4Ω) 250mΩ(8Ω)
dimensions od x height	85mm x 40mm
mounting	toroidal clamp & washers
weight	680g

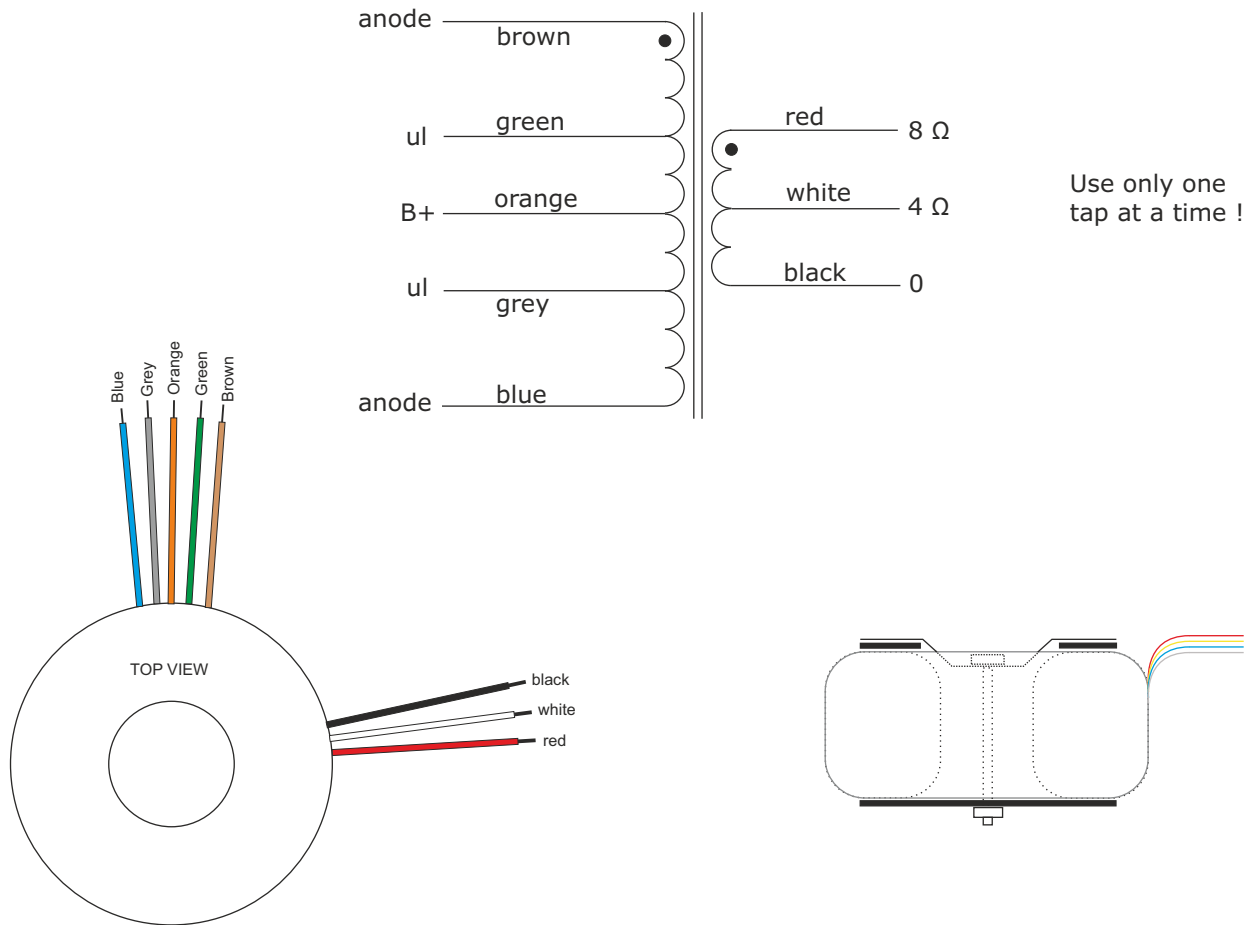

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

May 2020

20PP8K0S

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

