


# AMPLIMO Toroidal Output Transformer type 30SE3K0H



primary impedance	3000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	27.4 (4Ω) - 19.3 (8Ω)
UL-tap	40%
nominal power	30W
-3dB frequency bandwidth	13Hz - 85 kHz
power bandwidth (-3dB) starting at	19Hz
primary inductance	27H
primary leakage ind.	6.7mH
primary capacitance	845pF
primary DC-resistance	64Ω
secondary DC-resistance	159mΩ(4Ω), 312mΩ(8Ω)
dimensions od x height	144mm x 74mm
mounting	M8x20 center bolt
weight	4.5kg
Leadlength	200mm

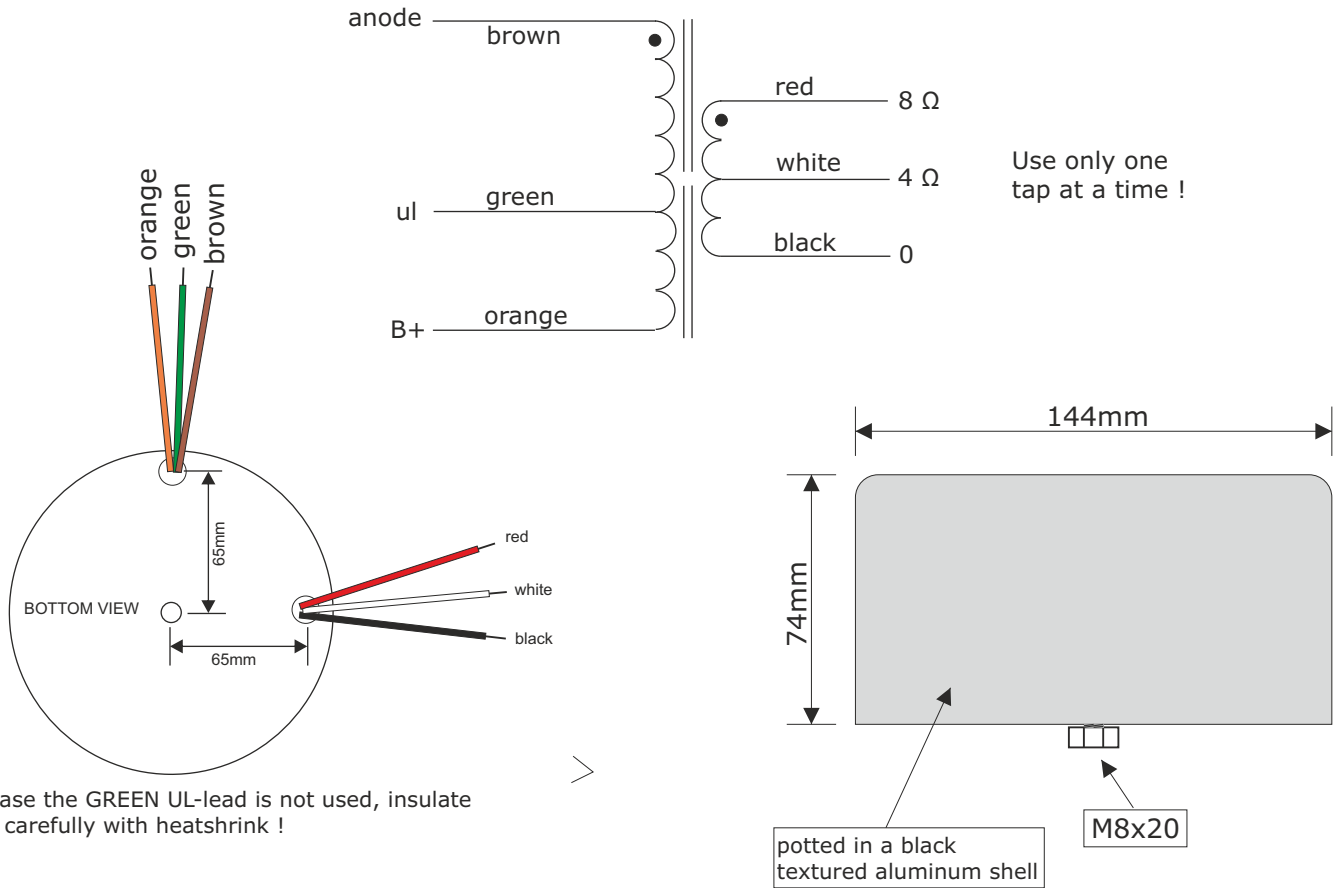

Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands

P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457

info@amplimo.nl  
http://www.amplimo.nl

HB


March 2021

# 30SE3K0H

Wide bandwidth toroidal  
tube output transformer

© Copyright Amplimo BV

30SE3K0H - frequency response

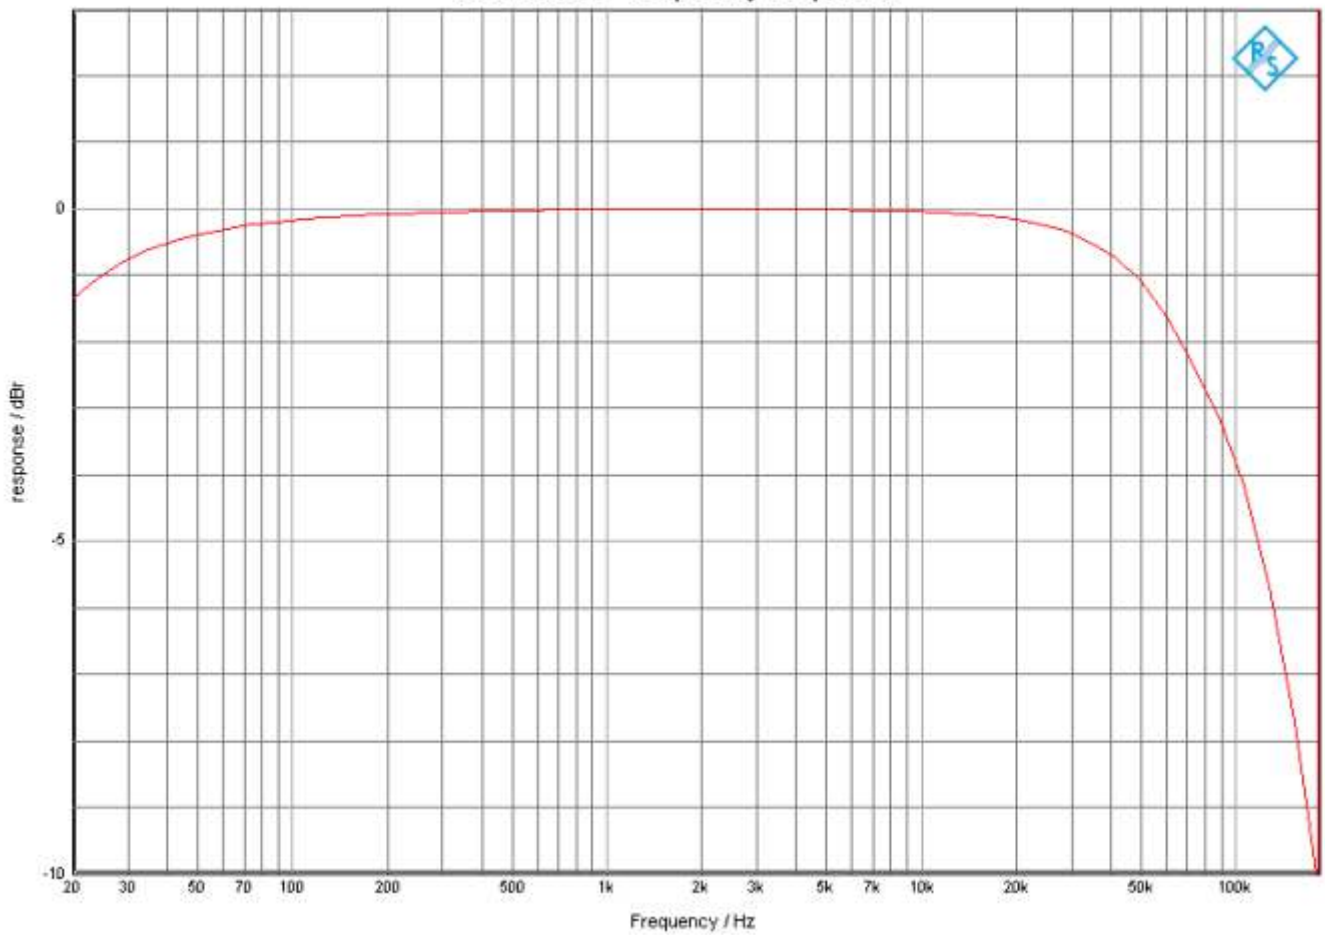

30SE3K0H - Phase response

