


# AMPLIMO Toroidal Output Transformer type 40PP4K0S



primary impedance	4000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	31.8 (4Ω) - 22.4 (8Ω)
UL-tap	35%
nominal power	40W
-3dB frequency bandwidth (1mW)	7Hz - 130kHz
power bandwidth (-3dB) starting at	28Hz (40W)
primary inductance	750H
primary leakage ind.	8mH
primary capacitance	350pF
primary DC-resistance	75Ω
secondary DC-resistance	115mΩ(4Ω) 250mΩ(8Ω)
dimensions od x height	93mm x 49mm
mounting	toroidal clamp & washers
weight	1.2kg

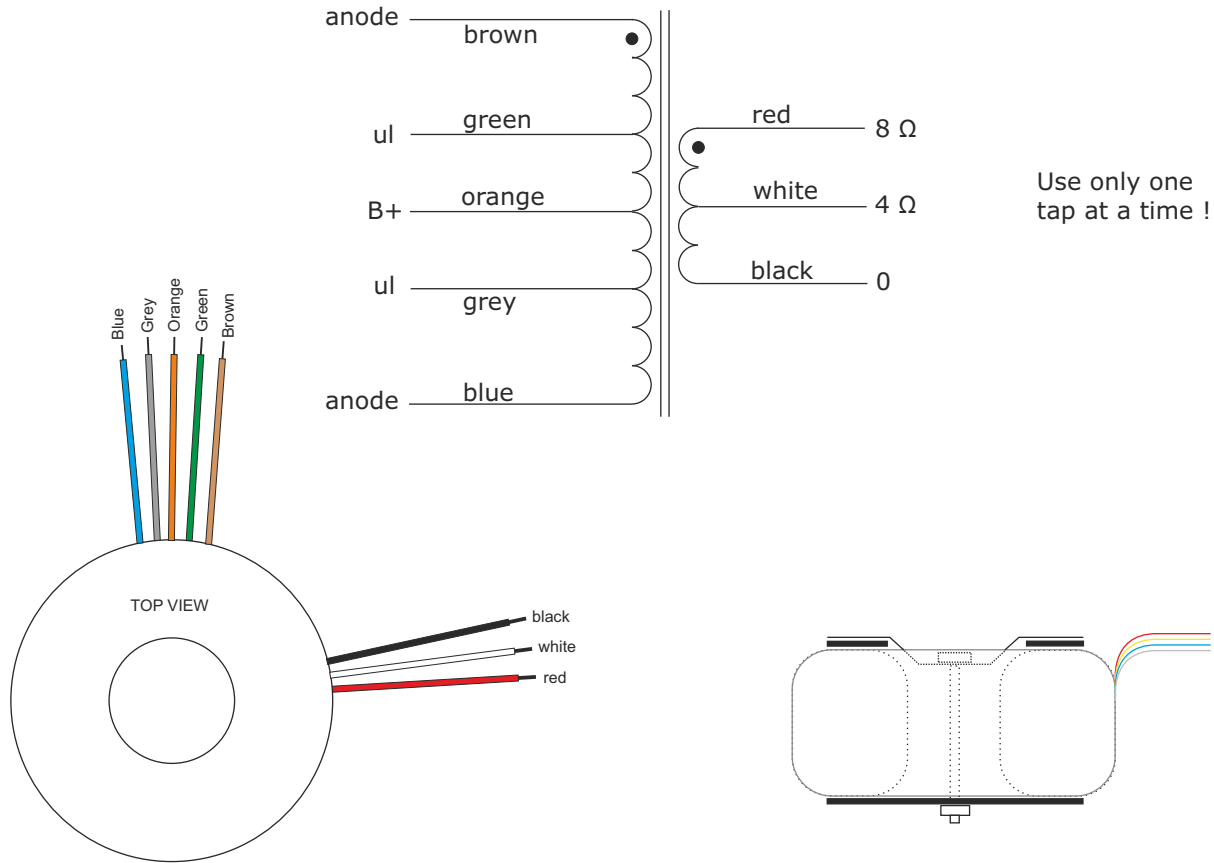

Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands  
  
 P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 283456  
 Fax+31 (0)545 283457  
  
 info@amplimo.nl  
 http://www.amplimo.nl

HB	May 2020
©	Copyright Amplimo BV

## 40PP4K0S

Wide bandwidth toroidal  
 tube output transformer

