


AMPLIMO Toroidal Output Transformer type 40PP6K0S



primary impedance	6000 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	39 (4Ω) - 27.4 (8Ω)
UL-tap	35%
nominal power	40W
-3dB frequency bandwidth (1mW)	6Hz - 91kHz
power bandwidth (-3dB) starting at	28Hz
primary inductance	1076H
primary leakage ind.	10mH
primary capacitance	455pF
primary DC-resistance	93Ω
secondary DC-resistance	110mΩ(4Ω) 187mΩ(8Ω)
dimensions od x height	94mm x 52mm
mounting	toroidal clamp & washers
weight	1.3kg

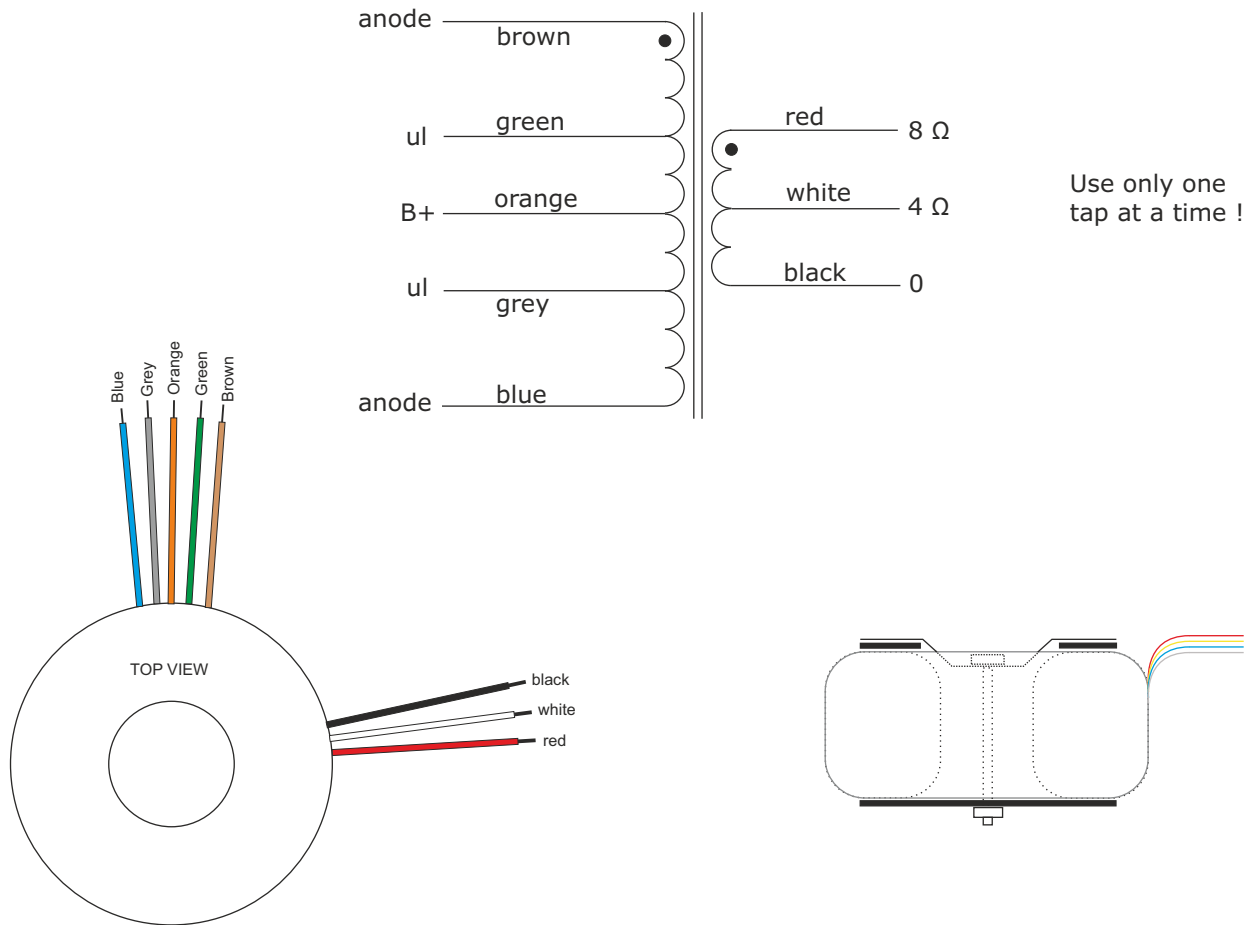

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

May 2020

40PP6K0S

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

