


AMPLIMO Toroidal Output Transformer type 65PP20KG



primary impedance	20000 Ω
secondary impedance	0 - 4 - 8 - 16 Ω
turns ratio	70.3(4Ω)-50.0(8Ω)-35.6(16Ω)
nominal power	65W
-3dB frequency bandwidth (1mW)	7Hz - 22kHz
power bandwidth (-3dB) starting at	35Hz
primary inductance	1400H
primary leakage ind.	13mH
primary capacitance	410pF
primary DC-resistance	200Ω
secondary DC-resistance	50mΩ(4Ω) 105mΩ(8Ω) 220mΩ(8Ω)
dimensions od x height	140mm x 62mm
mounting	toroidal clamp & washers
weight	4.2kg

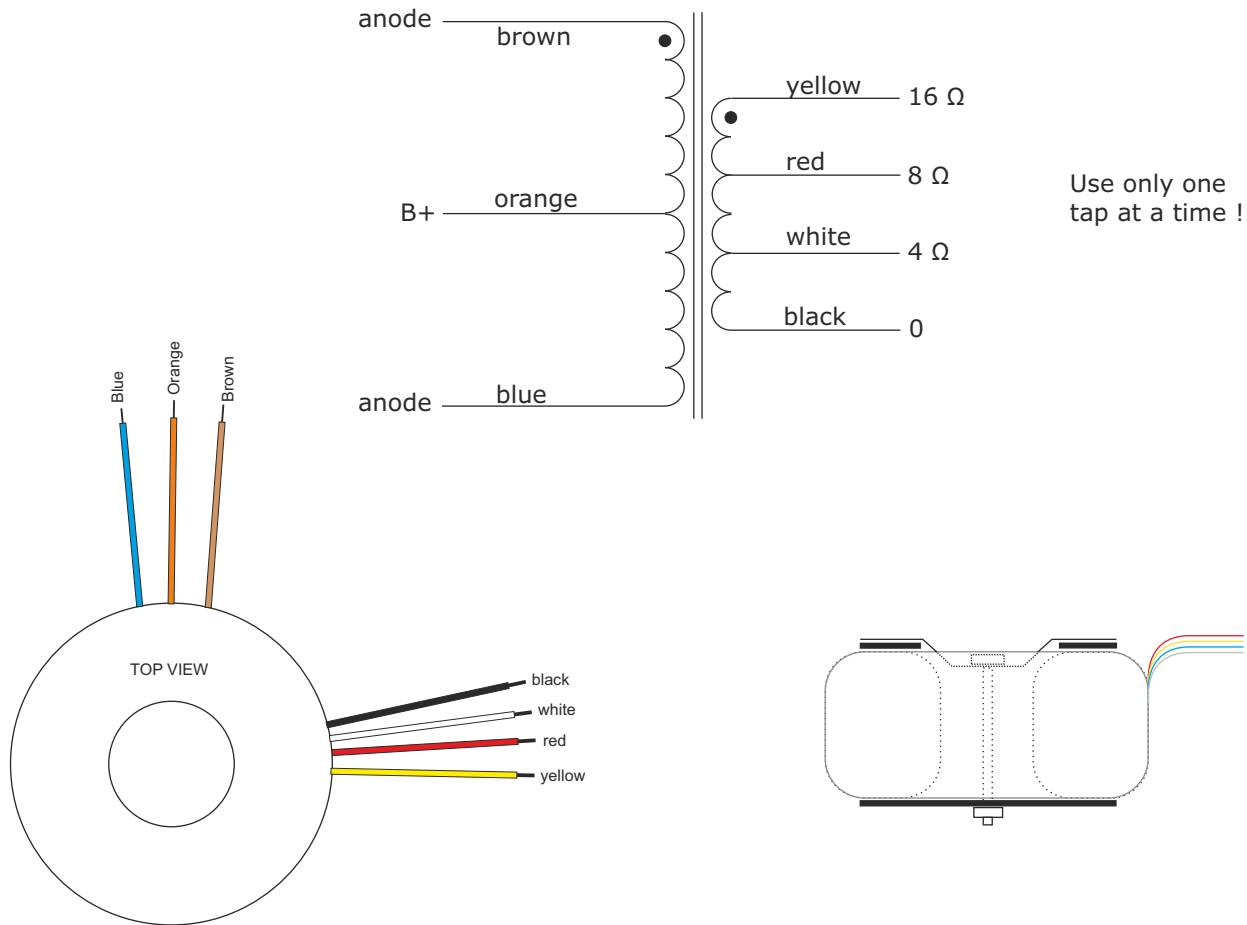

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

Sept 2021




Copyright Amplimo BV

65PP20KG

Wide bandwidth toroidal
tube output transformer

65PP20KG

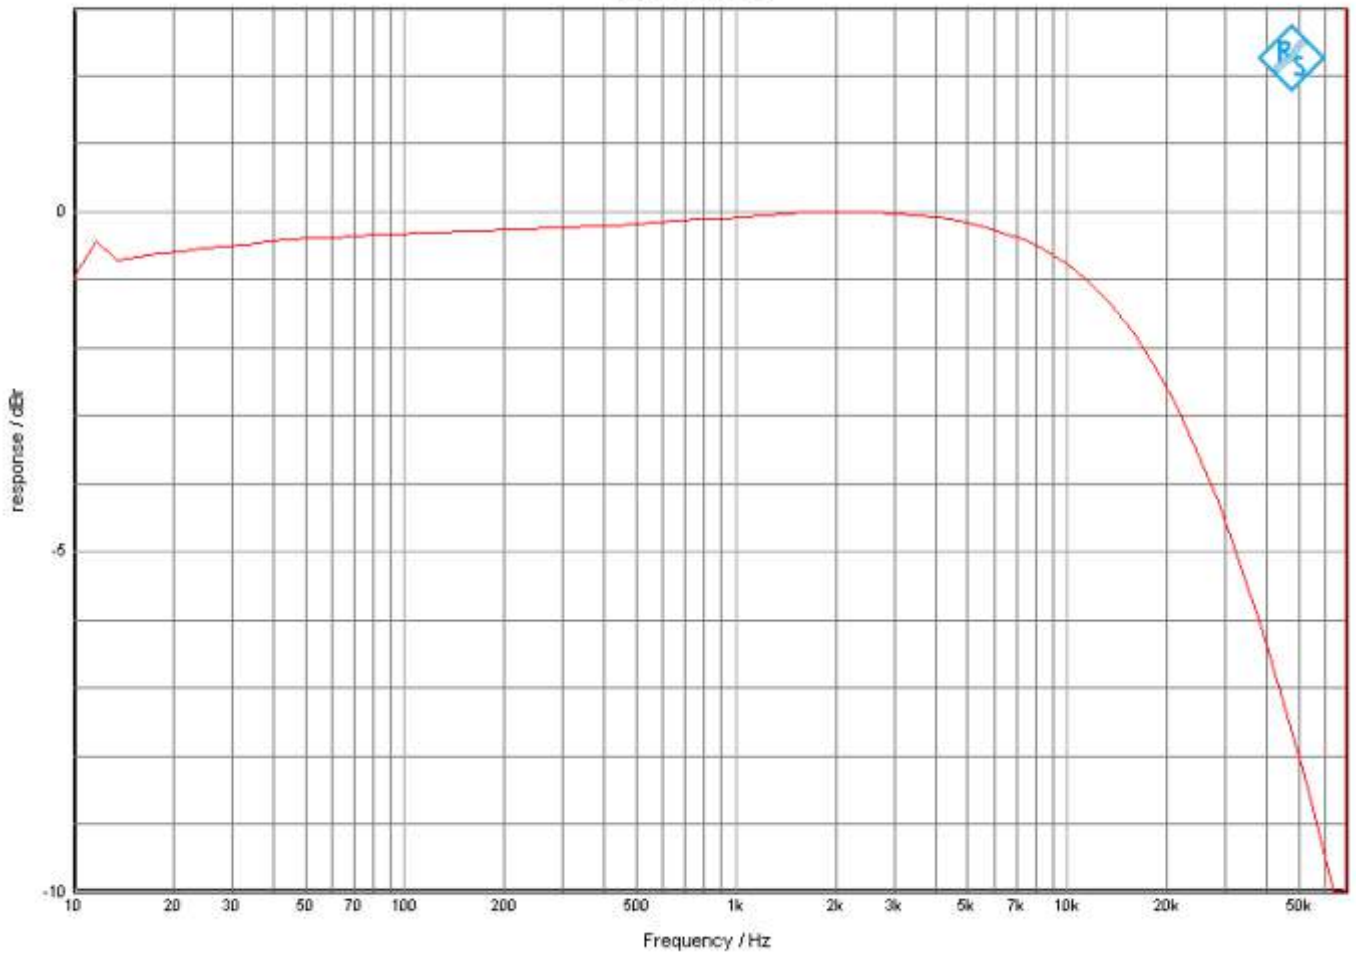

65PP20KG

