


AMPLIMO Toroidal Output Transformer type **80PP3K2H**

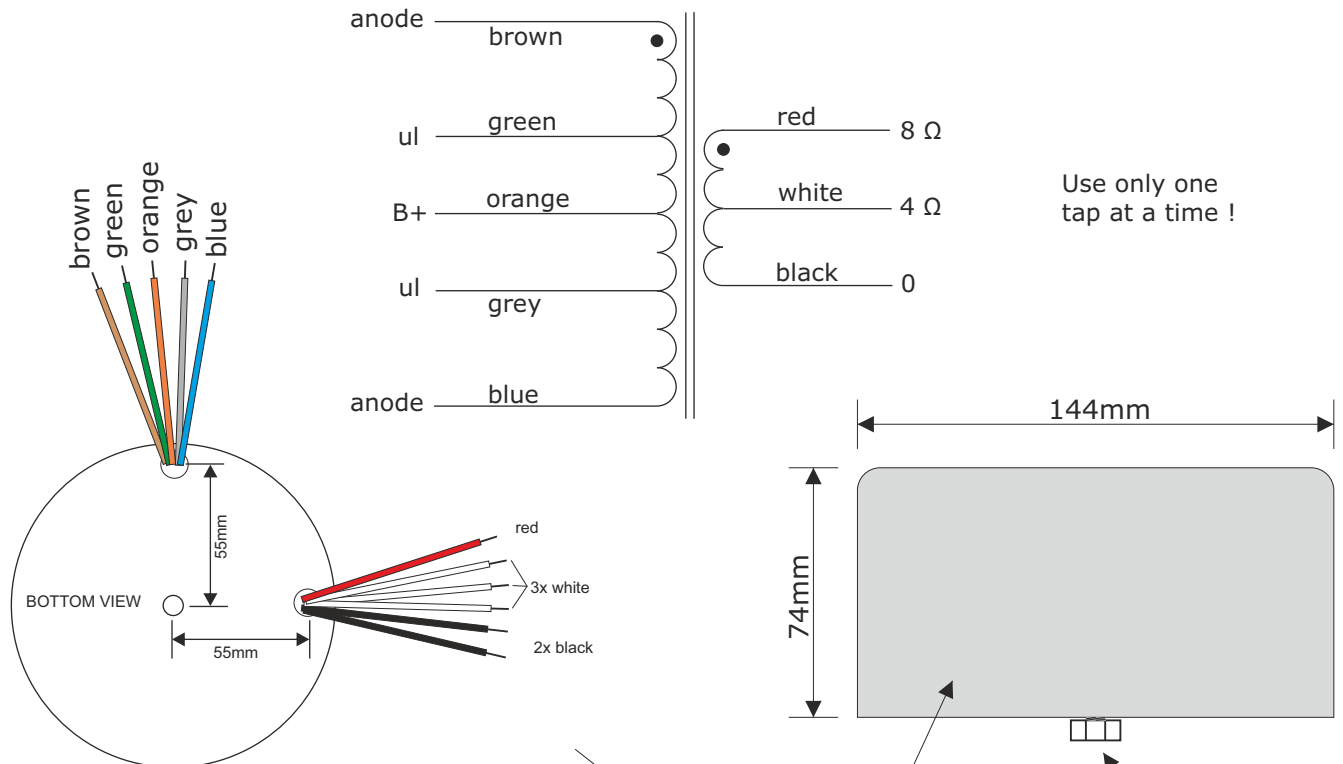

Always connect 3 white wires together  
Always connect 2 black wires together

In case the UL-leads (green and grey) are not used, insulate them carefully with heatshrink !

primary impedance	3200 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	28 (4Ω) - 20 (8Ω)
UL-tap	35%
nominal power	80W
-3dB frequency bandwidth	5Hz - 116kHz
power bandwidth (-3dB) starting at	30Hz
primary inductance	867H
primary leakage ind.	4.7mH
primary capacitance	590pF
primary DC-resistance	66Ω
secondary DC-resistance	0.12Ω(4Ω) 0.17(8Ω)
dimensions od x height	144mm x 74mm
mounting	M8x20 center bolt
weight	3.8kg
Leadlength	200mm




Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands  
  
P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457  
  
info@amplimo.nl  
http://www.amplimo.nl

HB  
Sept 2021  
  
© Copyright Amplimo BV

# 80PP3K2H

Wide bandwidth high-end toroidal output transformer

80PP3K3H

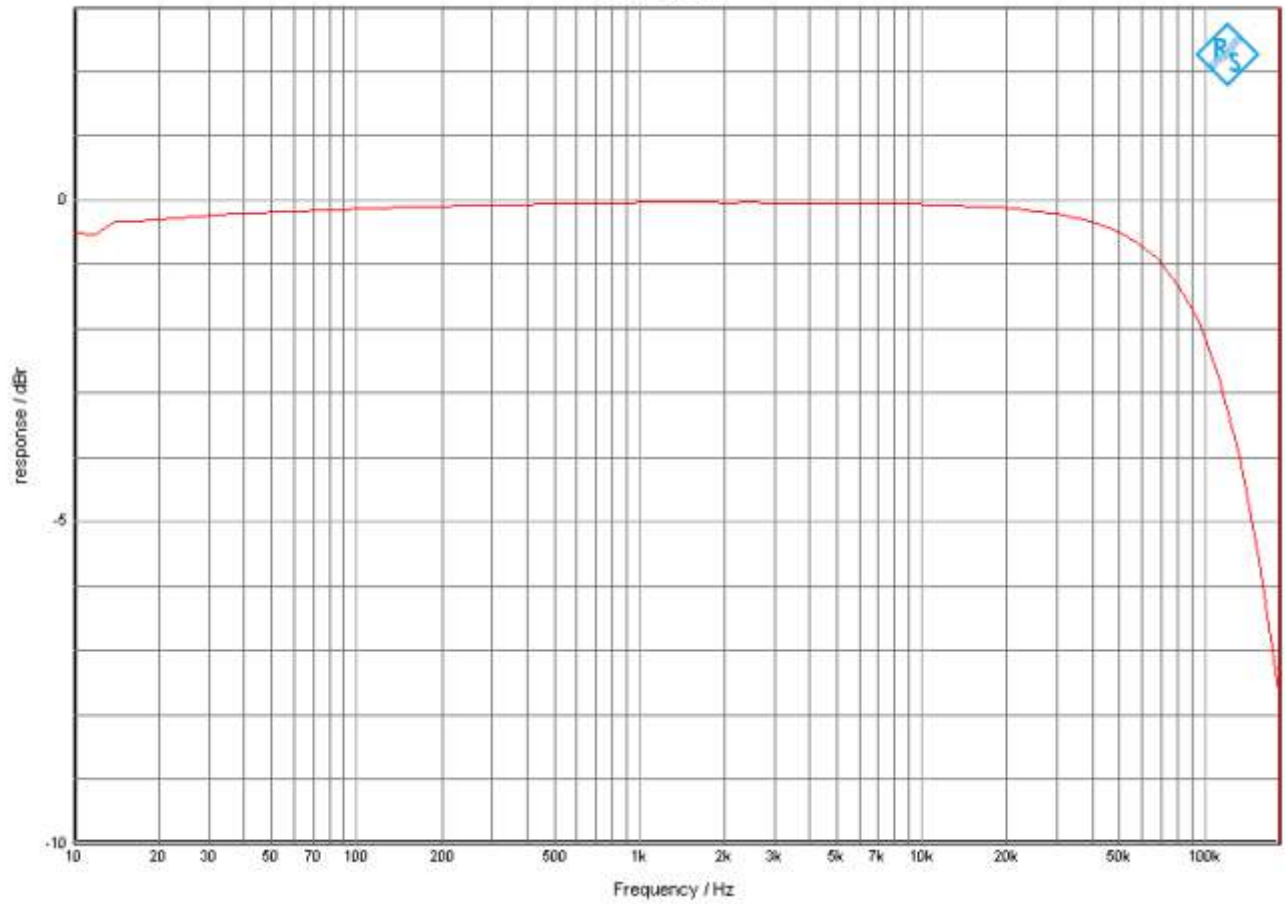

80PP3K3H

