
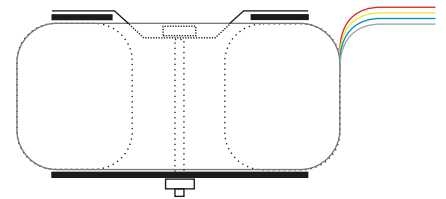
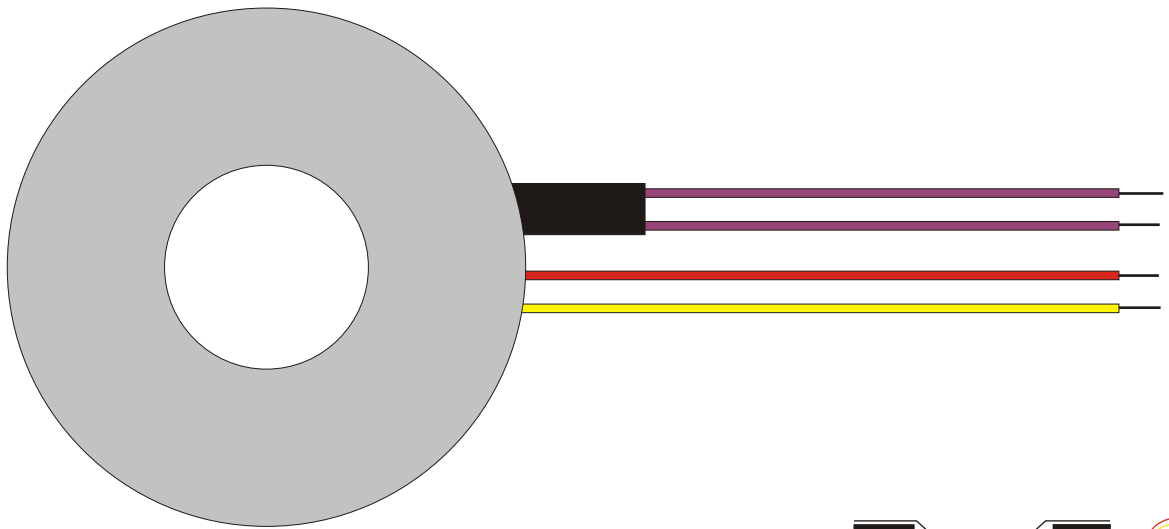


TOROIDAL TRANSFORMER 2N310

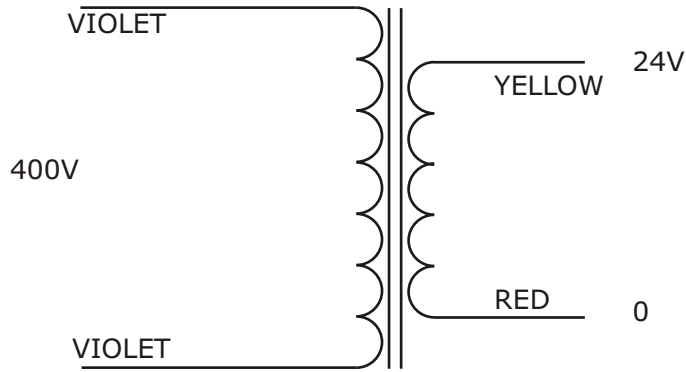

**Toroidal transformer:**  
**Power rating: 50VA**  
**Primary: 400V Violet - Violet**  
**Secondaries: 0 - 24V 2.08A Red - Yellow**  
**All leads are approx. 200mm long.**

**Built and tested according to EN61558.**  
**With UL-approval. UL-filenumber: E320377**

**Dimensions:**  
**Diameter: approx. 82mm**  
**Height: approx. 39mm**  
**Weight: approx. 0.78kg**

**supplied with mounting kit.**

Type number	primary	secondaries	
		voltage	current
2N310	400V	0 - 24V	2.08A

All voltages are under full ohmic load.  
 Regulation : 12%



Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
 Fax+31 (0)545 28 3457

info@amplimo.nl  
<http://www.amplimo.nl>

HB

June -2009



Copyright Amplimo BV

**2N310**

**toroidal transformer  
 for 400V applications**