
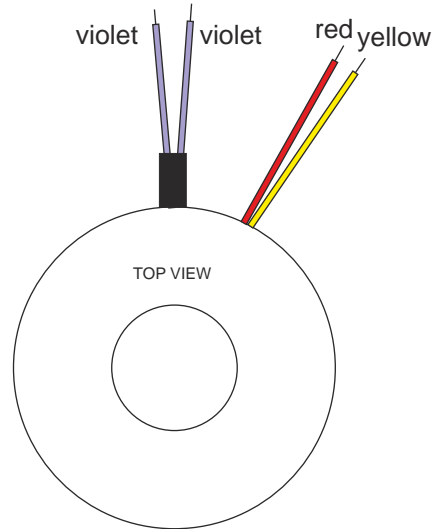
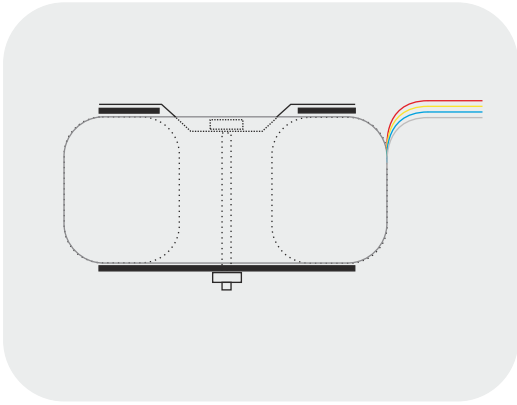


# Toroidal transformer type 6N128

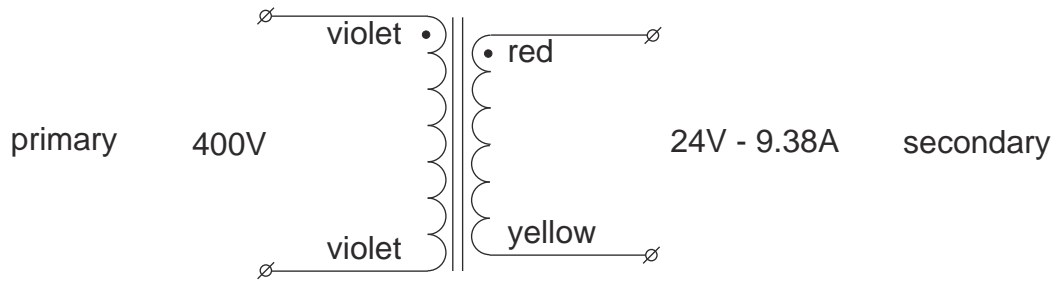

Power rating 225VA  
 Primary voltage 400VAC - 50/60Hz  
 Secondary voltages 24V - 9.38A  
 Regulation 5%

Diameter 112mm  
 Height 49mm  
 Weight 2.3kg

Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø90mm  
 2 neoprene washers Ø90mm  
 1 bolt M5x60mm with nut

Wound and tested according to EN61558. With CE and UL/CSA approvals. UL filenumber E320377.

225VA	400V	50Hz / 60Hz	
	CE	UL US	

	Industrieweg 14 NL-7161BX NEEDE The Netherlands  P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457  <a href="mailto:info@amplimo.nl">info@amplimo.nl</a> <a href="http://www.amplimo.nl">http://www.amplimo.nl</a>	HB	Aug 2012	<b>6N128</b>  400V toroidal transformer 300VA
	© Copyright Amplimo BV			