


Toroidal transformer type 7N1900S

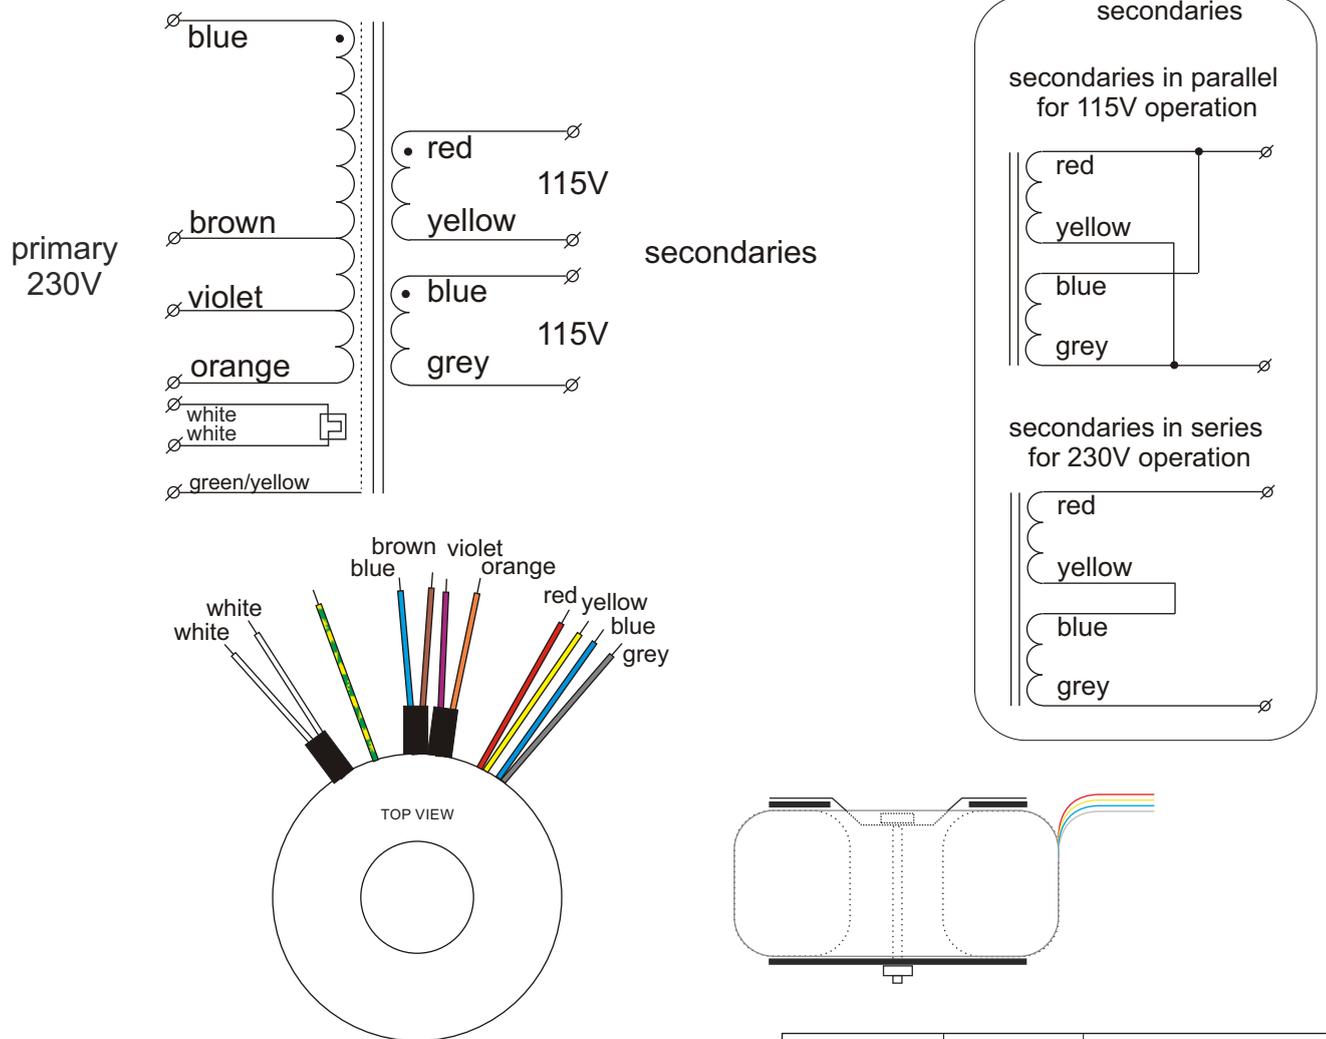

Diameter 122mm
 Height 58mm
 Weight 3 kg
 All leads are approx. 200mm long

Supplied with mounting materials

Type number	primary	secondaries voltage	current
7N1900S	230V 50/60 Hz	2x 115V	1.09A

All voltages are under full ohmic load.
Regulation : resp. 2.5% , 4.3% and 8.2%

Audio grade isolation transformer 7N1900S

- Primary: 230V 50/60Hz with taps for light, medium and full load
- Built-in self-resetting thermal cut-out optionally to be wired in series with the primary
- Electrostatic screen between primary and secondary windings to be connected to earthpotential
- Secondary: 2x 115V – 1.09A for series or parallel operation
- Low noise, low strayfield audio-grade design
- With KEMA KEUR, ENEC, CE and UL/CSA approvals, KEMA certificate 2027348.02, UL filenumber E320377
- Time lag fuses to be used:
 - primary: 1.25A, 5x20mm, IEC 127, high I²t value
 - secondary: none
- Use of the primary taps:
 - with an expected load less than 100VA connect mains to blue and orange
 - with an expected load from 100 to 175VA connect mains to blue and violet
 - with an expected load from 175 to 250VA connect mains to blue and brown
 - correct connection will result in the smallest deviation of the secondary voltage
 - **NOTE WELL: always carefully isolate the unused pair of primary leads**



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457

info@amplimo.nl
http://www.amplimo.nl

HB

Feb 2015

7N1900S

toroidal power transformer
250VA

© Copyright Amplimo BV