





## Toroidal transformer type 7N667

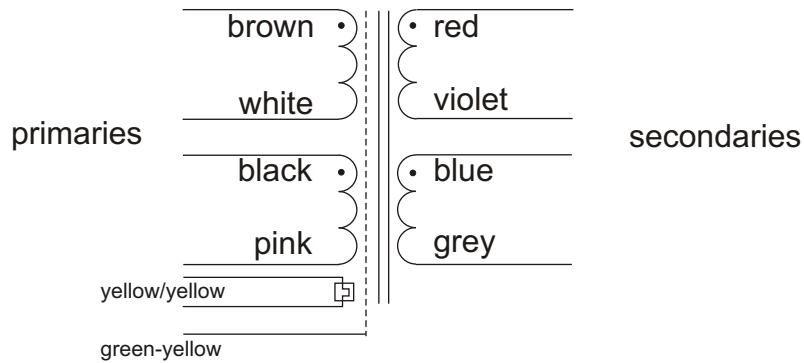


**primaries in parallel  
for 115V input**





**secondaries in parallel  
for 115V output**

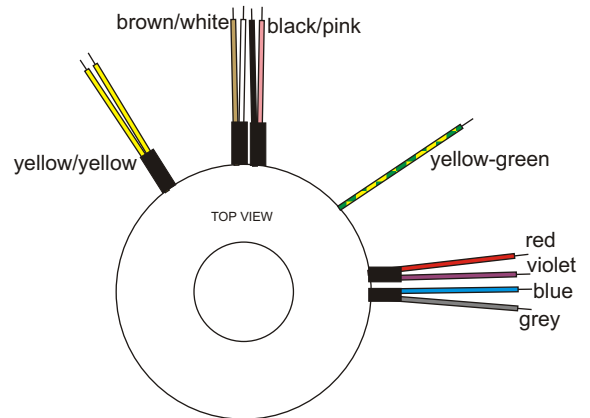

**primaries in series  
for 230V input**



**secondaries in series  
for 230V output**



primaries: 2x 115V  
 secondaries: 2x115V 1.14A  
 total power rating:260VA  
 regulation:7%  
 maximum leakage current: 0.10mA

Diameter        122mm  
 Height            54mm  
 Weight            2.8kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø9cm  
 2 neoprene washers Ø9cm  
 1 bolt M5x70 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 97.1779, UL filenumber E179800  
 Built en tested according to EN60601-1

Built-in selfresetting thermal cutout to be switched in series with all primaries.

Static tapescreen between primary and secondary winding (green-yellow striped flexible wire to be connected to earth potential)

Time lag fuses to be used.  
 for 230V primary: 1.6A, 5x20mm, IEC127, high I<sup>2</sup>t value.  
 for 115V primary: 3.15A, 5x20mm, IEC127, high I<sup>2</sup>t value, in Series with 2 NTC-resistors type NTC2.5

Secondary: none



Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
 Fax+31 (0)545 28 3457

info@amplimo.nl  
 http://www.amplimo.nl

HB

April 2006

# 7N667

toroidal power transformer  
for medical purposes

© Copyright Amplimo BV